


KLV-21SR2

SERVICE MANUAL

US Model
Canadian Model

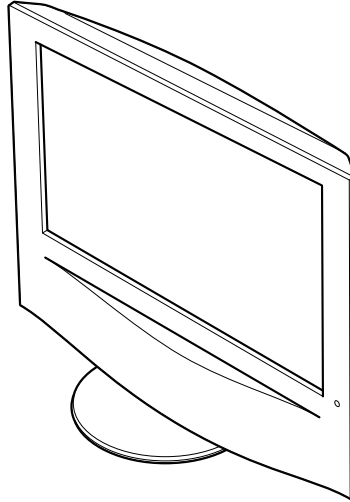

SPECIFICATIONS

Television system:

American TV standard

Channel coverage:

VHF: 2-13/UHF: 14-69/CATV: 1-125

Antenna:

75 ohm external terminal for VHF/UHF

Screen size (measured diagonally):

21 inches

Panel System:

a-Si TFT Active Matrix LCD panel
(Effective dots: more than 99.99%)

Display resolution:

1,024 dots (horizontal) × 768 lines (vertical)

VIDEO 1/2 IN:

S VIDEO (4-pin mini DIN):

Y: 1 Vp-p, 75-ohms unbalanced,
sync negative
C: 0.286 Vp-p (Burst signal),
75 ohms

VIDEO: 1 Vp-p, 75-ohms unbalanced,
sync negative

AUDIO: 500 mVrms (100% modulation)
Impedance: 47 kilohms

VIDEO 3 IN:

Y, P_B, P_R (Component Video):

Y: 1.0 Vp-p, 75 ohms
unbalanced, sync negative

P_B: 0.7 Vp-p, 75 ohms

P_R: 0.7 Vp-p, 75 ohms

Signal format: 480i, 480p

AUDIO: 500 mVrms (100% modulation)
Impedance: 47 kilohms

AUDIO OUT:

500 mVrms (100% modulation)

More than 500 mVrms at the maximum volume setting
(Variable)

More than 500 mVrms (Fixed)

Headphones:

Stereo minijack

Impedance: 16 ohms

Speaker:

Full range: ø5.0 cm (1 ³¹/₃₂ inches) (2)

Woofer: ø5.5 cm (2 ⁵/₃₂ inches) (2)

Speaker output:

2.0 W + 2.0 W + 3.8 W

Power requirement:

120 V AC, 60 Hz

LCD Color TV
SONY®

Power consumption:

In use (Max.): 118 W
In standby: Less than 1 W

Dimensions (W/H/D):

Including TV stand: $528 \times 516 \times 230$ mm
($20 \frac{25}{32} \times 20 \frac{5}{16} \times 9 \frac{1}{16}$ inches)
Without TV stand: $528 \times 491 \times 118$ mm
($20 \frac{25}{32} \times 19 \frac{11}{32} \times 4 \frac{21}{32}$ inches)

Mass:

Including TV stand: 10.6 kg (23 lb 6 oz)
Without TV stand: 9.4 kg (20 lb 12 oz)

Supplied accessories:

Remote control RM-Y1104 (1)
Batteries size AA (2)
75-ohm coaxial cable (1)
AC power cord (1)
Operating Instructions
Warranty Card
Product Registration

Optional accessories:

Note that some optional accessories may be out of stock.

Headphones plug adaptor
Connecting cables
Wall-Mount Bracket
SU-W210

Design and specifications are subject to change without notice.

SAFETY CHECK-OUT

After correcting the original service problem, perform the following safety checks before releasing the set to the customer:


1. Check the area of your repair for unsoldered or poorly-soldered connections. Check the entire board surface for solder splashes and bridges.
2. Check the interboard wiring to ensure that no wires are "pinched" or contact high-wattage resistors.
3. Check that all control knobs, shields, covers, ground straps, and mounting hardware have been replaced. Be absolutely certain that you have replaced all the insulators.
4. Look for unauthorized replacement parts, particularly transistors, that were installed during a previous repair. Point them out to the customer and recommend their replacement.
5. Look for parts which, though functioning, show obvious signs of deterioration. Point them out to the customer and recommend their replacement.
6. Check the line cords for cracks and abrasion. Recommend the replacement of any such line cord to the customer.
7. Check the B+ and HV to see if they are specified values. Make sure your instruments are accurate; be suspicious of your HV meter if sets always have low HV.
8. Check the antenna terminals, metal trim, "metallized" knobs, screws, and all other exposed metal parts for AC Leakage. Check leakage as described right.

LEAKAGE TEST

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 0.5 mA (500 microamperes).

Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers' instructions to use these instruments.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The "limit" indication is 0.75 V, so analog meters must have an accurate low-voltage scale. The Simpson 250 and Sanwa SH-63Trd are examples of a passive VOMs that are suitable. Nearly all battery operated digital multimeters that have a 2 V AC range are suitable. (See Fig. A)

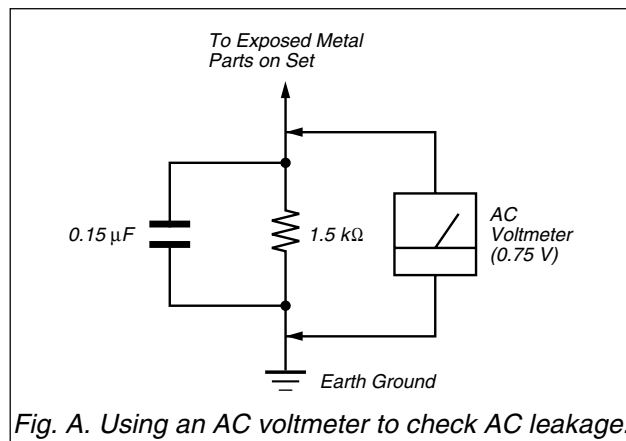

CAUTION

These servicing instructions are for use by qualified service personnel only. To reduce the risk of electric shock, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so.

WARNING!!

An isolation transformer should be used during any service to avoid possible shock hazard, because of live chassis. The chassis of this receiver is directly connected to the ac power line.



SAFETY-RELATED COMPONENT WARNING!!

Components identified by shading and ⚠ mark on the schematic diagrams, exploded views, and in the parts list are critical for safe operation. Replace these components with Sony parts whose part numbers appear as shown in this manual or in supplements published by Sony. Circuit adjustments that are critical for safe operation are identified in this manual. Follow these procedures whenever critical components are replaced or improper operation is suspected.

ATTENTION!!

Ces instructions de service sont à l'usage du personnel de service qualifié seulement. Pour prévenir le risque de choc électrique, ne pas faire l'entretien autre que celui contenu dans le Mode d'emploi à moins que vous soyez qualifié faire ainsi.

Afin d'éviter tout risque d'électrocution provenant d'un châssis sous tension, un transformateur d'isolement doit être utilisé lors de tout dépannage. Le châssis de ce récepteur est directement raccordé à l'alimentation du secteur.



ATTENTION AUX COMPOSANTS RELATIFS A LA SECURITE!!


Les composants identifiés par une trame et par une marque ⚠ sur les schémas de principe, les vues explosées et les listes de pièces sont d'une importance critique pour la sécurité du fonctionnement. Ne les remplacer que par des composants Sony dont le numéro de pièce est indiqué dans le présent manuel ou dans des suppléments publiés par Sony. Les réglages de circuit dont l'importance est critique pour la sécurité du fonctionnement sont identifiés dans le présent manuel. Suivre ces procédures lors de chaque remplacement de composants critiques, ou lorsqu'un mauvais fonctionnement suspecte.

TABLE OF CONTENTS


| | | | |
|--|------------|---------------------------------------|------------|
| 1. DISASSEMBLY | 1-1 | 4. EXPLODED VIEWS | 4-1 |
| 1-1. REAR COVER AND STAND ASSY REMOVAL | 1-1 | 4-1. CHASSIS | 4-2 |
| 1-2. REAR CABINET ASSY REMOVAL | 1-1 | 4-2. PACKING MATERIALS | 4-4 |
| 1-3. H1 BOARD REMOVAL | 1-2 | | |
| 1-4. D2 BOARD REMOVAL | 1-2 | 5. ELECTRICAL PARTS LIST | 5-1 |
| 1-5. U1 BOARD REMOVAL | 1-3 | | |
| 1-6. G BOARD REMOVAL | 1-3 | | |
| 1-7. A AND TU BOARDS REMOVAL | 1-4 | | |
| 1-8. B BOARD REMOVAL | 1-4 | | |
| 1-9. H3 BOARD REMOVAL | 1-5 | | |
| 1-10. H4 BOARD REMOVAL | 1-5 | | |
| 1-11. H2 BOARD REMOVAL | 1-6 | | |
| 1-12. LCD MODULE REMOVAL | 1-6 | | |
| 2. ADJUSTMENTS | 2-1 | | |
| 2-1. Adjustment of signal level. | 2-1 | | |
| 2-1-1. Check AD calibration registration items. | 2-1 | | |
| 2-1-2. Y signal AD calibration of TV/VIDEO input. | 2-1 | | |
| 2-1-3. C signal AD calibration of TV/VIDEO input. | 2-1 | | |
| 2-1-4. Y signal AD calibration of COMPONENT input. | 2-2 | | |
| 2-1-5. C signal AD calibration of COMPONENT input. | 2-2 | | |
| 2-2. White Balance Adjustment | 2-2 | | |
| 2-2-1. White Balance of color temperature “cool” | 2-2 | | |
| 2-2-2. White Balance Adjustment of color temperature “natural” | 2-3 | | |
| 2-2-3. White Balance Adjustment of color temperature “warm” | 2-3 | | |
| 3. DIAGRAMS | 3-1 | | |
| 3-1. BLOCK DIAGRAMS | 3-1 | | |
| 3-2. FRAME DIAGRAM | 3-6 | | |
| 3-3. CIRCUIT BOARDS LOCATION | 3-7 | | |
| 3-4. CHEMATIC DIAGRAMS AND PRINTED WIRING BOARDS | 3-7 | | |
| (1) Schematic Diagrams of A Board | 3-8 | | |
| (2) Schematic Diagrams of B Board | 3-13 | | |
| (3) Schematic Diagrams of D2 Board | 3-22 | | |
| (4) Schematic Diagram of G Board | 3-24 | | |
| (5) Schematic Diagram of H1 and H2 Boards | 3-26 | | |
| (6) Schematic Diagram of H3 and H4 Boards | 3-27 | | |
| (7) Schematic Diagram of TU Board | 3-28 | | |
| (8) Schematic Diagram of U1 Board | 3-29 | | |
| 3-5. SEMICONDUCTORS | 3-30 | | |

SECTION 1 DISASSEMBLY


1-1. REAR COVER AND STAND ASSY REMOVAL

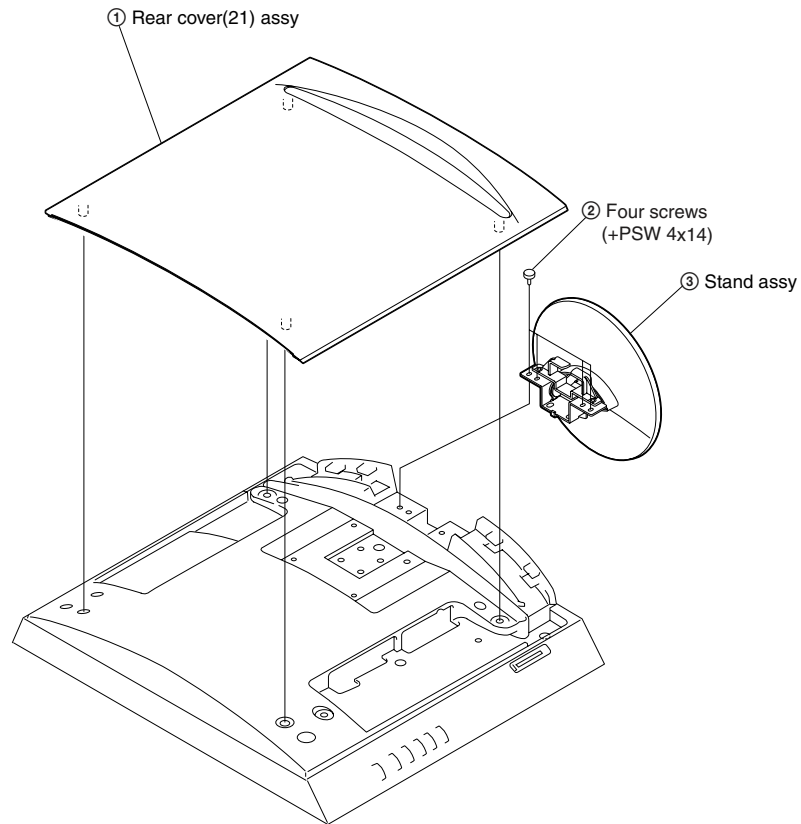


1-2. REAR CABINET ASSY REMOVAL

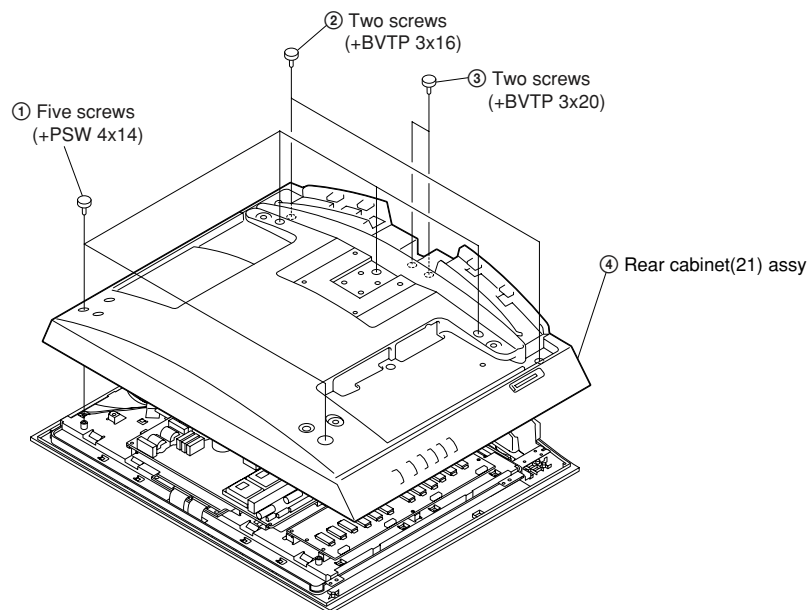


1-3. H1 BOARD REMOVAL

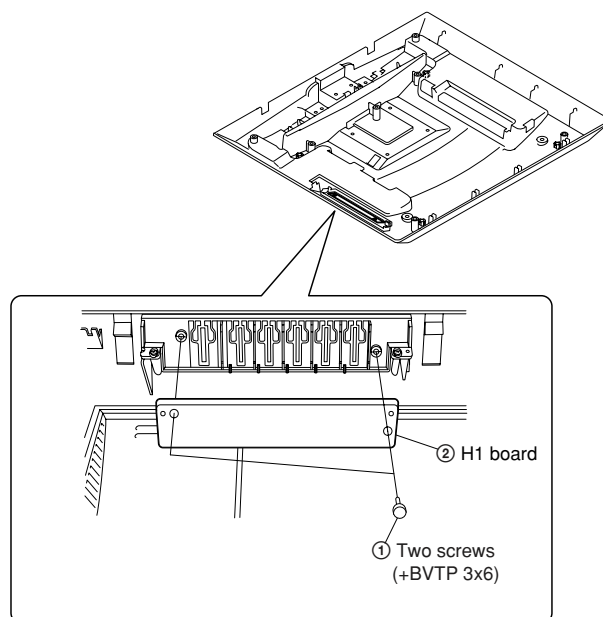


1-4. D2 BOARD REMOVAL

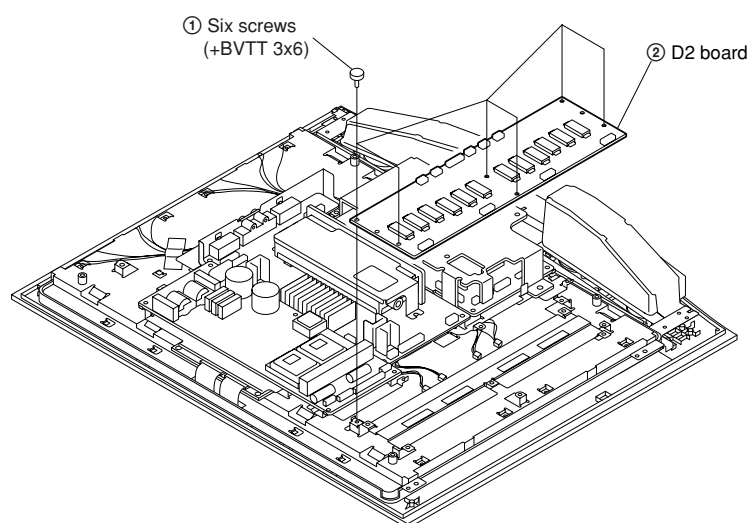


1-5. U1 BOARD REMOVAL

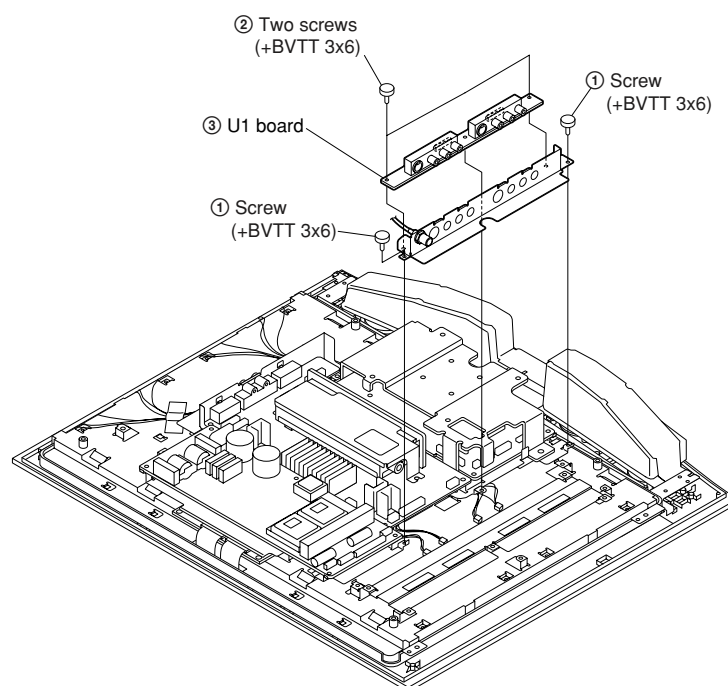


1-6. G BOARD REMOVAL

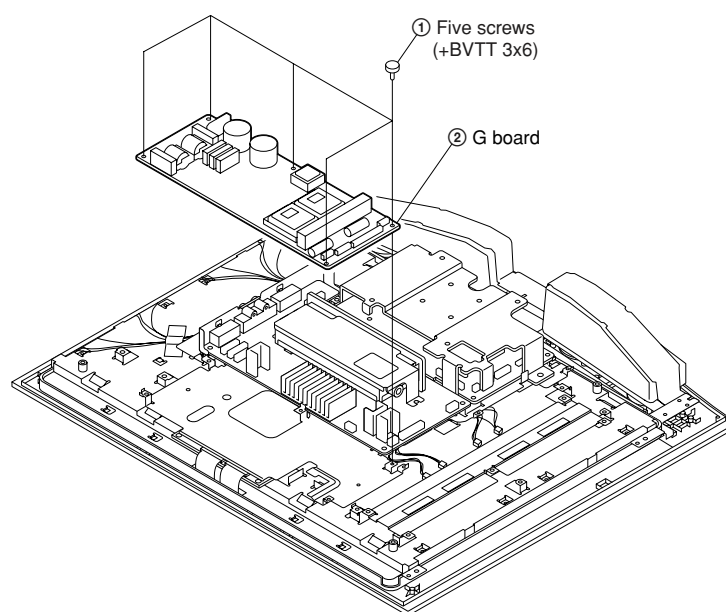


1-7. A AND TU BOARDS REMOVAL

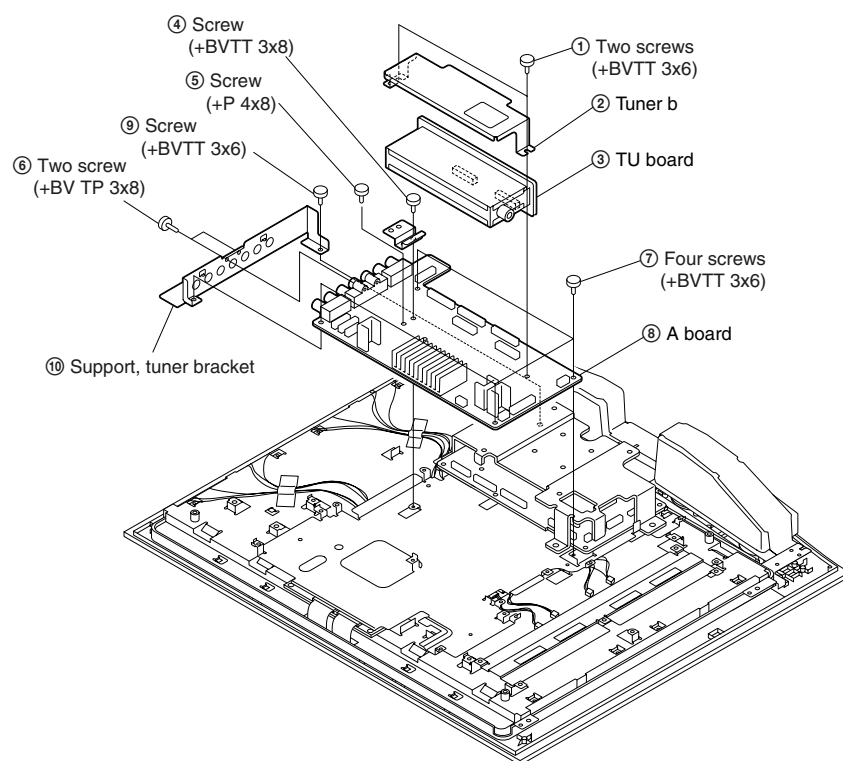


1-8. B BOARD REMOVAL

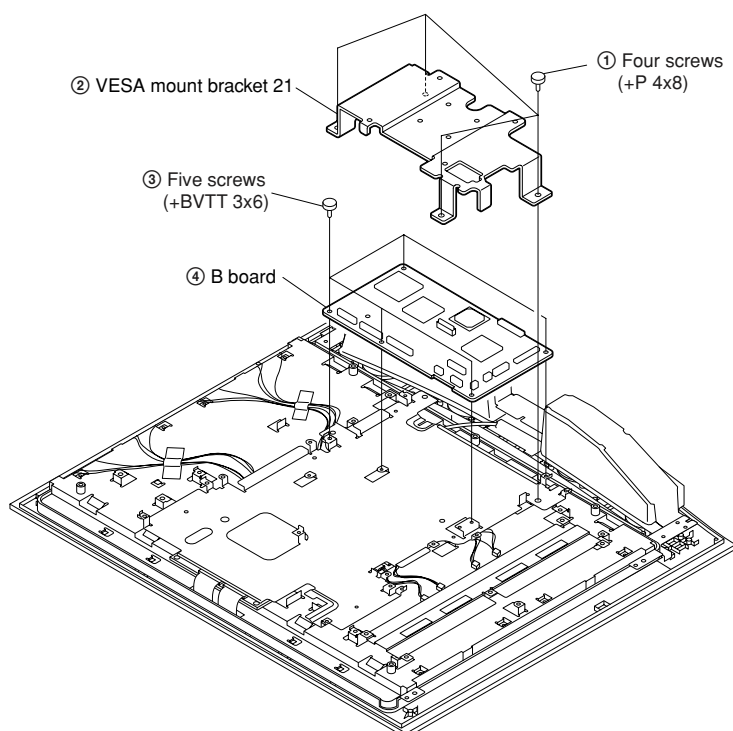


1-9. H3 BOARD REMOVAL

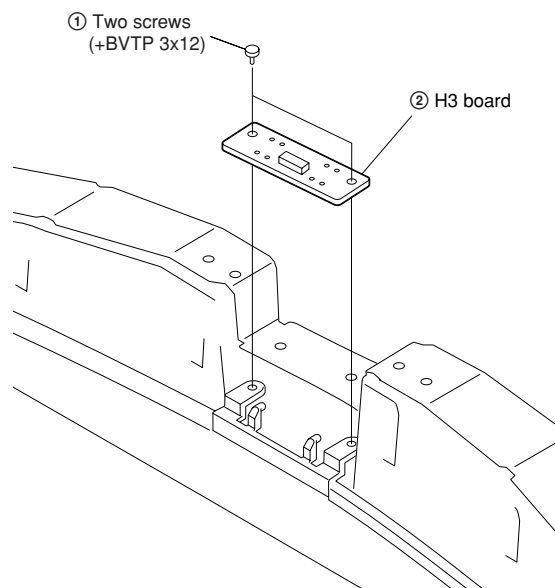


1-10. H4 BOARD REMOVAL

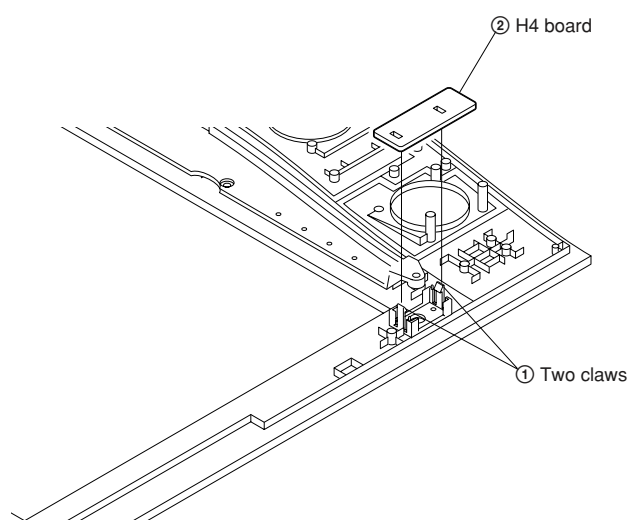

1-11. H2 BOARD REMOVAL

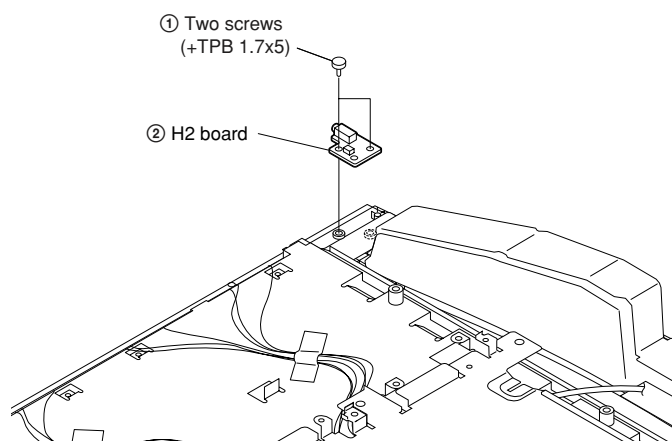

1-12. LCD MODULE REMOVAL

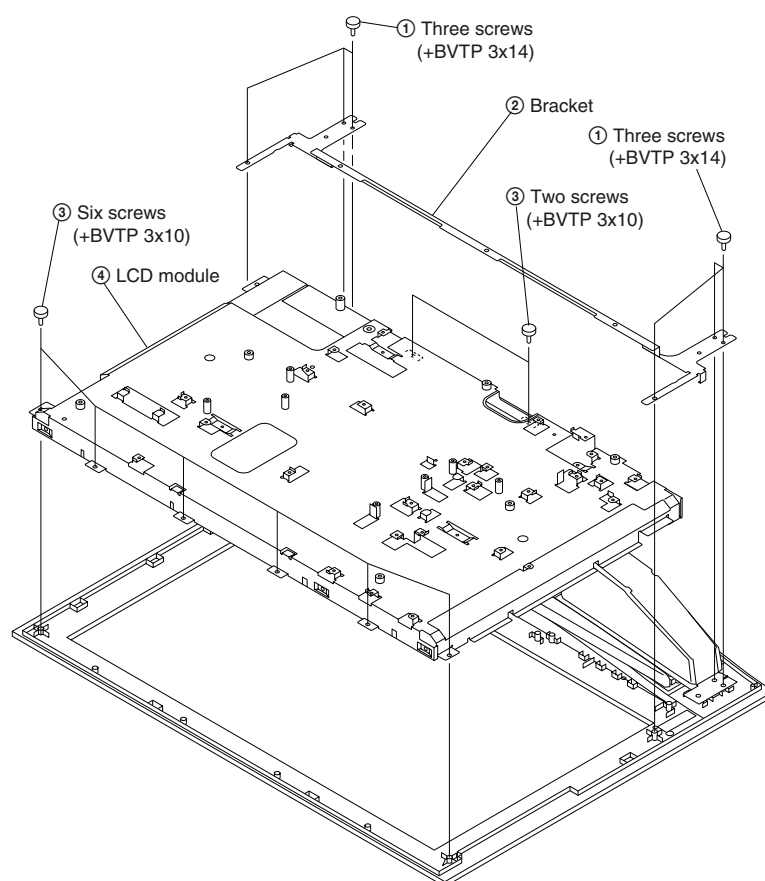

SECTION 2 ADJUSTMENTS

< PREPARATIONS >

1. Aging
 - Input no signal and set the monitor to aging mode.
 - Aging Setting
MON_CON_REG_2 = 217
2. Aging condition
 - Power supply : 220-240 V (50/60Hz)
 - Time : More than 10 minutes
 - Temperature : 22°C to 28°C
 - Luminance : On aging mode setting

Note:

When the power is cycled between aging and W/B adjustment, perform the aging in 30sec or more before the W/B adjustment.

2-1. Adjustment of signal level.

2-1-1. Check AD calibration registration items.

1. Check that follows items are default .

<Check registration items>

TARGET_PW_IN_Y
 ADJ_Y_DEADBAND
 ADJ_Y_LOOPATTEN
 TARGET_PW_IN_C
 ADJ_C_DEADBAND
 ADJ_C_LOOPATTEN
 AD_ADJ_TIME_OUT
 AD_COLOR_OFFSET_TV
 AD_COLOR_OFFSET_V
 AD_COLOR_OFFSET_S
 AD_COLOR_OFFSET_D1
 AD_COLOR_OFFSET_D2
 AD_COLOR_OFFSET_D3
 AD_COLOR_OFFSET_D4

2-1-2. Y signal AD calibration of TV/VIDEO input.

1. Check "CO_CTRL" = 0
2. Set data as follows.

<Setting data>

| | |
|-----------|---------|
| COLOR | 25 |
| DYNA_PICT | 0 (OFF) |
| DC_TRAN | 0 (OFF) |

3. Input 7.5 IRE black full field with burst in video 1 input .
4. Send "READ_PW_INPUT_Y" command from ECS.
5. Check thgat the detection value of "PW_INPUT_Y" is within the standard of the following column.
 <Video(composit) input detection value average on 0.75 IRE black full field>

| Item | Standard |
|------------|----------|
| PW_INPUT_Y | 11 ± 3 |

6. Input 100 IRE white full field with burst.
7. Send "ADJUST_Y_LEVEL_VIDEO" command from ECS.
 The Y_LEVEL_CCP2_04 registration of the video range is adjusted automatic by this command.
 Adjustment value also is copied in the TV and S video range.
8. Check that the detection value of "PW_INPUT_Y" is within the standard of the following column.
 <Video(composit) input detection value average on 100 IRE white full field>

| Item | Standard |
|------------|----------|
| PW_INPUT_Y | 195 ± 2 |

2-1-3. C signal AD calibration of TV/VIDEO input.

1. Check "MON_CON_REG 1" = 3
2. Set data as follows.

<Setting data>

| | |
|-----------|---------|
| COLOR | 25 |
| DYNA_PICT | 0 (OFF) |
| DC_TRAN | 0 (OFF) |

3. Input 0 IRE black full field with burst in video input .
4. Send "READ_PW_INPUT_CB" command from ECS.
5. Check thgat the detection value of "PW_INPUT_CB" is within the standard of the following column.
 <Video(composit) input detection value average on 0 IRE black full field>

| Item | Standard |
|-------------|----------|
| PW_INPUT_CB | 128 ± 5 |

6. Input blue full field with burst.
7. Send "ADJUST_C_LEVEL_VIDEO" command from ECS.
 The C_LEVEL_CCP2_05 registration of the video range is adjusted automatic by this command.
 The value that increased and redused offset data is copied in the TV and S video range.
8. Check that the detection value of "PW_INPUT_CB" is within the standard of the following column.

<Video(composit) input standard value on blue full field>

| Item | Standard |
|-------------|----------|
| PW_INPUT_CB | 230 ± 2 |

9. Input red full field with burst.
10. Send "READ_PW_INPUT_CR" command from ECS.
11. Check that the detection value of "PW_INPUT_CR" is within the standard of the following column.

<Video(composit) input standard value on red full field>

| Item | Standard |
|-------------|----------|
| PW_INPUT_CR | 230 ± 3 |

2-1-4. Y signal AD calibration of COMPONENT input.

1. Check "CP_CTRL" = 0
2. Set data as follows.

<Setting data>

| | |
|-----------|---------|
| COLOR | 25 |
| DYNA_PICT | 0 (OFF) |
| DC_TRAN | 0 (OFF) |

3. Input 0 IRE black full field with burst in video 3 input .
4. Send "READ_PW_INPUT_Y" command from ECS.
5. Check thgat the detection value of "PW_INPUT_Y" is within the standard of the following column.

<Video 3 input detection value average on 0 IRE black full field>

| Item | Standard |
|------------|----------|
| PW_INPUT_Y | 11 ± 3 |

6. Input 100 IRE white full field with burst.
7. Send "ADJUST_Y_LEVEL_D1" command from ECS.
The Y_LEVEL_CCP2_04 registration of the D1 range is adjusted automatic by this command.
Adjustment value also is copied in the D2, D3 and D4 range.
8. Check that the detection value of "PW_INPUT_Y" is within the standard of the following column.

<Video 3 input detection value average on 100 IRE white full field>

| Item | Standard |
|------------|----------|
| PW_INPUT_Y | 195 ± 2 |

2-1-5. C signal AD calibration of COMPONENT input.

1. Check "CP_CTRL" = 0
2. Set data as follows.

<Setting data>

| | |
|-----------|---------|
| COLOR | 25 |
| DYNA_PICT | 0 (OFF) |
| DC_TRAN | 0 (OFF) |

3. Input 0 IRE black full field with burst in video 3 input .
4. Send "READ_PW_INPUT_CB" command from ECS.
5. Check thgat the detection value of "PW_INPUT_CB" is within the standard of the following column.

<Video(composit) input detection value average on 0 IRE black full field>

| Item | Standard |
|-------------|----------|
| PW_INPUT_CB | 128 ± 5 |

6. Input blue full field with burst.
7. Send "ADJUST_C_LEVEL_D1" command from ECS.
The C_LEVEL_CCP2_05 registration of the D1 range is adjusted automatic by this command.
The value that increased and redused offset data is copied in the D2, D3 and D4 range.

8. Check that the detection value of "PW_INPUT_CB" is within the standard of the following column.

<Video 3 input standard value on blue full field>

| Item | Standard |
|-------------|----------|
| PW_INPUT_CB | 230 ± 2 |

9. Input red full field with burst.
10. Send "READ_PW_INPUT_CR" command from ECS.
11. Check that the detection value of "PW_INPUT_CR" is within the standard of the following column.

<Video 3 input standard value on blue full field>

| Item | Standard |
|-------------|----------|
| PW_INPUT_CR | 230 ± 3 |

2-2. White Balance Adjustment

2-2-1. White Balance of color temperature "cool"

1. After setting PICTURE_MODE=2(Pro) set data as follows.

<Confirmation of setting data>

| Save system | Item |
|--------------|--|
| Picture Save | PICTURE =100 (Max) BRIGHTNESS=50 (Center) COLOR_INDEX=1 ("High") DYNA_PICT=0 DC_TRAN=0 U_BACKLIGHT=10 (Max) |
| Default Save | ECO_MODE=1 (Standard) |
| Color Save | R_DRIVE=125 G_DRIVE=128 B_DRIVE=140 R_BKG=132 G_BKG=128 B_BKG=131 |

2. Input 70 IRE gray full field signal in video 1 input .
3. Adjust R_DRIVE, B_DRIVE until high light adjustment value.

<high light adjustment value (9000K)>

| | KLVS-21SR2 | range |
|---|------------|--------|
| x | 0.279 | 0.7JND |
| y | 0.286 | 0.7JND |
| Y | — | N/A |

4. Input 20 IRE gray full field signal in video 1 input .
5. Adjust R_BKG, B_BKG until low light adjustment value.

<back ground adjustment value >

| | KLVS-21SR2 | range |
|---|------------|--------|
| x | 0.275 | 0.9JND |
| y | 0.272 | 0.9JND |
| Y | — | N/A |

6. Repeat step 1-4 until it is high and low light adjustment value.
7. Do "Color Save"

2-2-2. White Balance Adjustment of color temperature “natural”

1. Set the COLOR_INDEX to 2 (Natural).
2. Set the R_DRIVE, G_DRIVE, B_DRIVE, R_BKG, G_BKG, and B_BKG to the following calculated value.

Setting of Color Temperature “Natural”

| Item | Formula 21 |
|---------|--|
| R_DRIVE | Adjusted value of Color Temperature “Cool” x 1.017 |
| G_DRIVE | Adjusted value of Color Temperature “Cool” |
| B_DRIVE | Adjusted value of Color Temperature “Cool” x 0.958 |
| R_BKG | Adjusted value of Color Temperature “Cool” x 0.976 |
| G_BKG | Adjusted value of Color Temperature “Cool” |
| B_BKG | Adjusted value of Color Temperature “Cool” x 1.002 |

3. Perform the Color Save.

2-2-3. White Balance Adjustment of color temperature “warm”

1. Set the COLOR_INDEX to 3 (Warm).
2. Set the R_DRIVE, G_DRIVE, B_DRIVE, R_BKG, G_BKG, and B_BKG to the following calculated value.


Setting of Color Temperature “Warm”

| Item | Formula 21 |
|---------|--|
| R_DRIVE | Adjusted value of Color Temperature “Cool” x 1.053 |
| G_DRIVE | Adjusted value of Color Temperature “Cool” |
| B_DRIVE | Adjusted value of Color Temperature “Cool” x 0.952 |
| R_BKG | Adjusted value of Color Temperature “Cool” x 0.965 |
| G_BKG | Adjusted value of Color Temperature “Cool” |
| B_BKG | Adjusted value of Color Temperature “Cool” x 0.958 |


3. Perform the Color Save.
4. After the adjustment, reset unsaved items (not included the Color Save) to initial value.


3. DIAGRAMS


3-1. BLOCK DIAGRMS

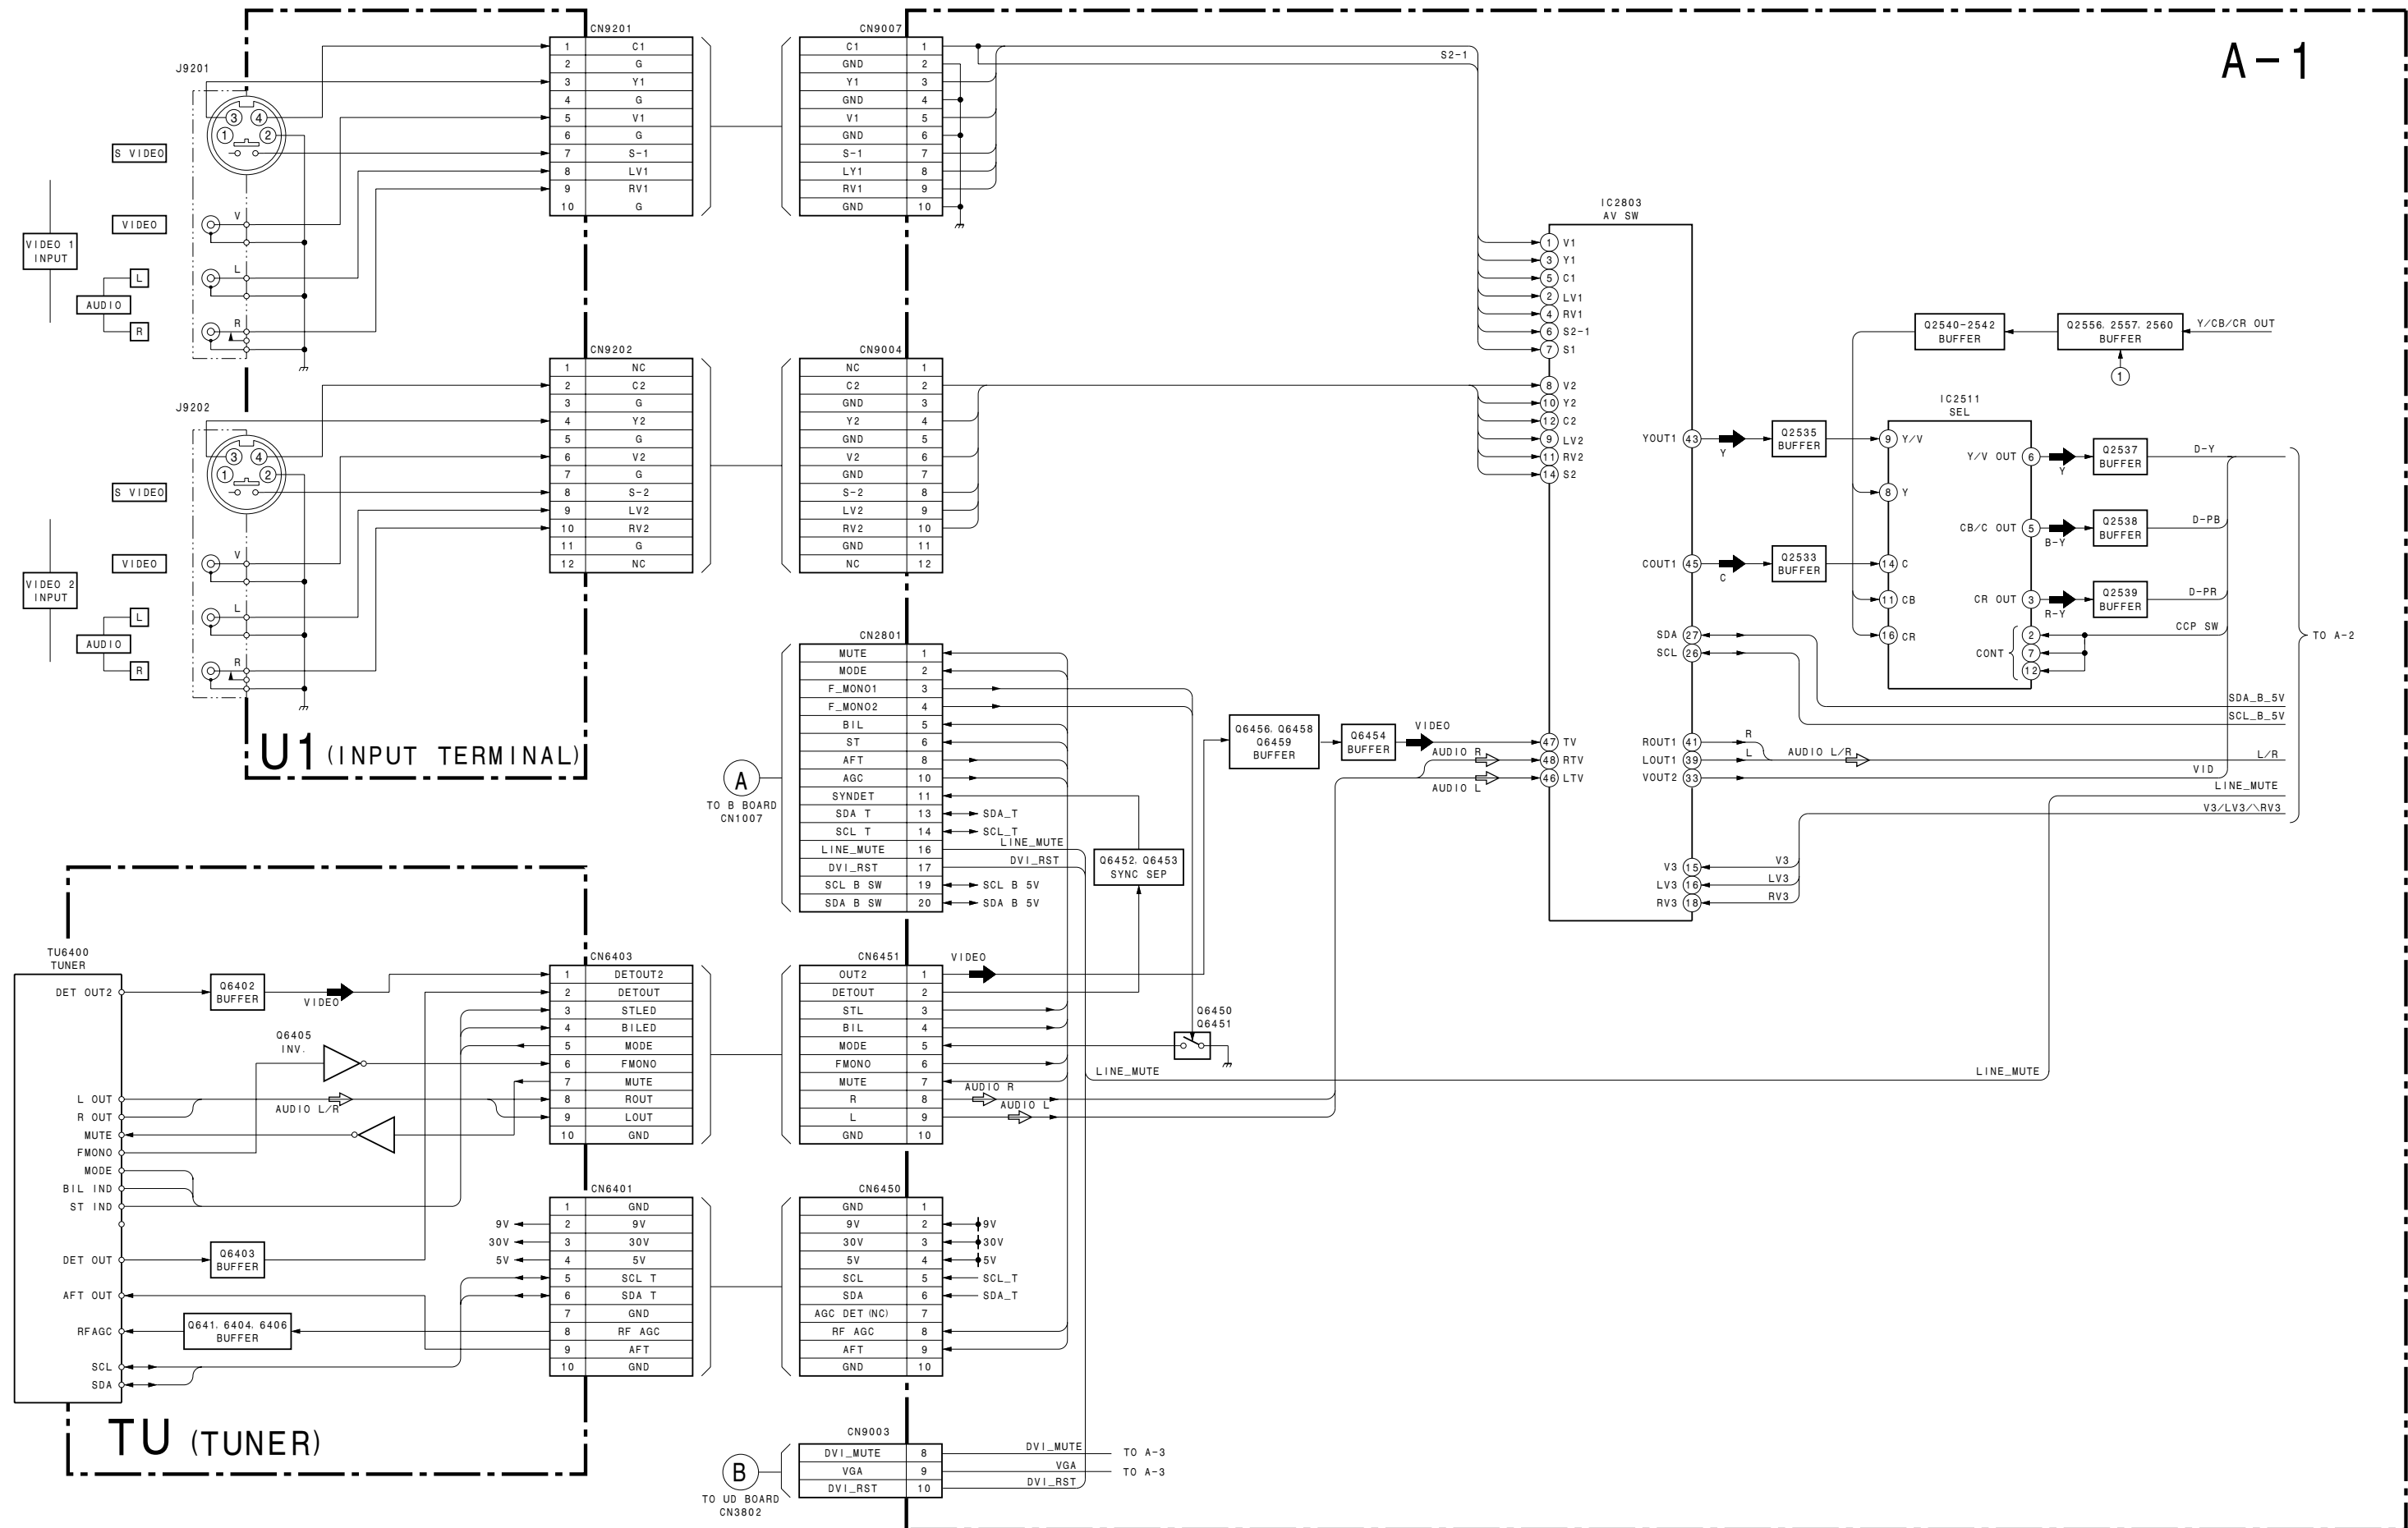


A-2 (AV SW, AUDIO AMP)

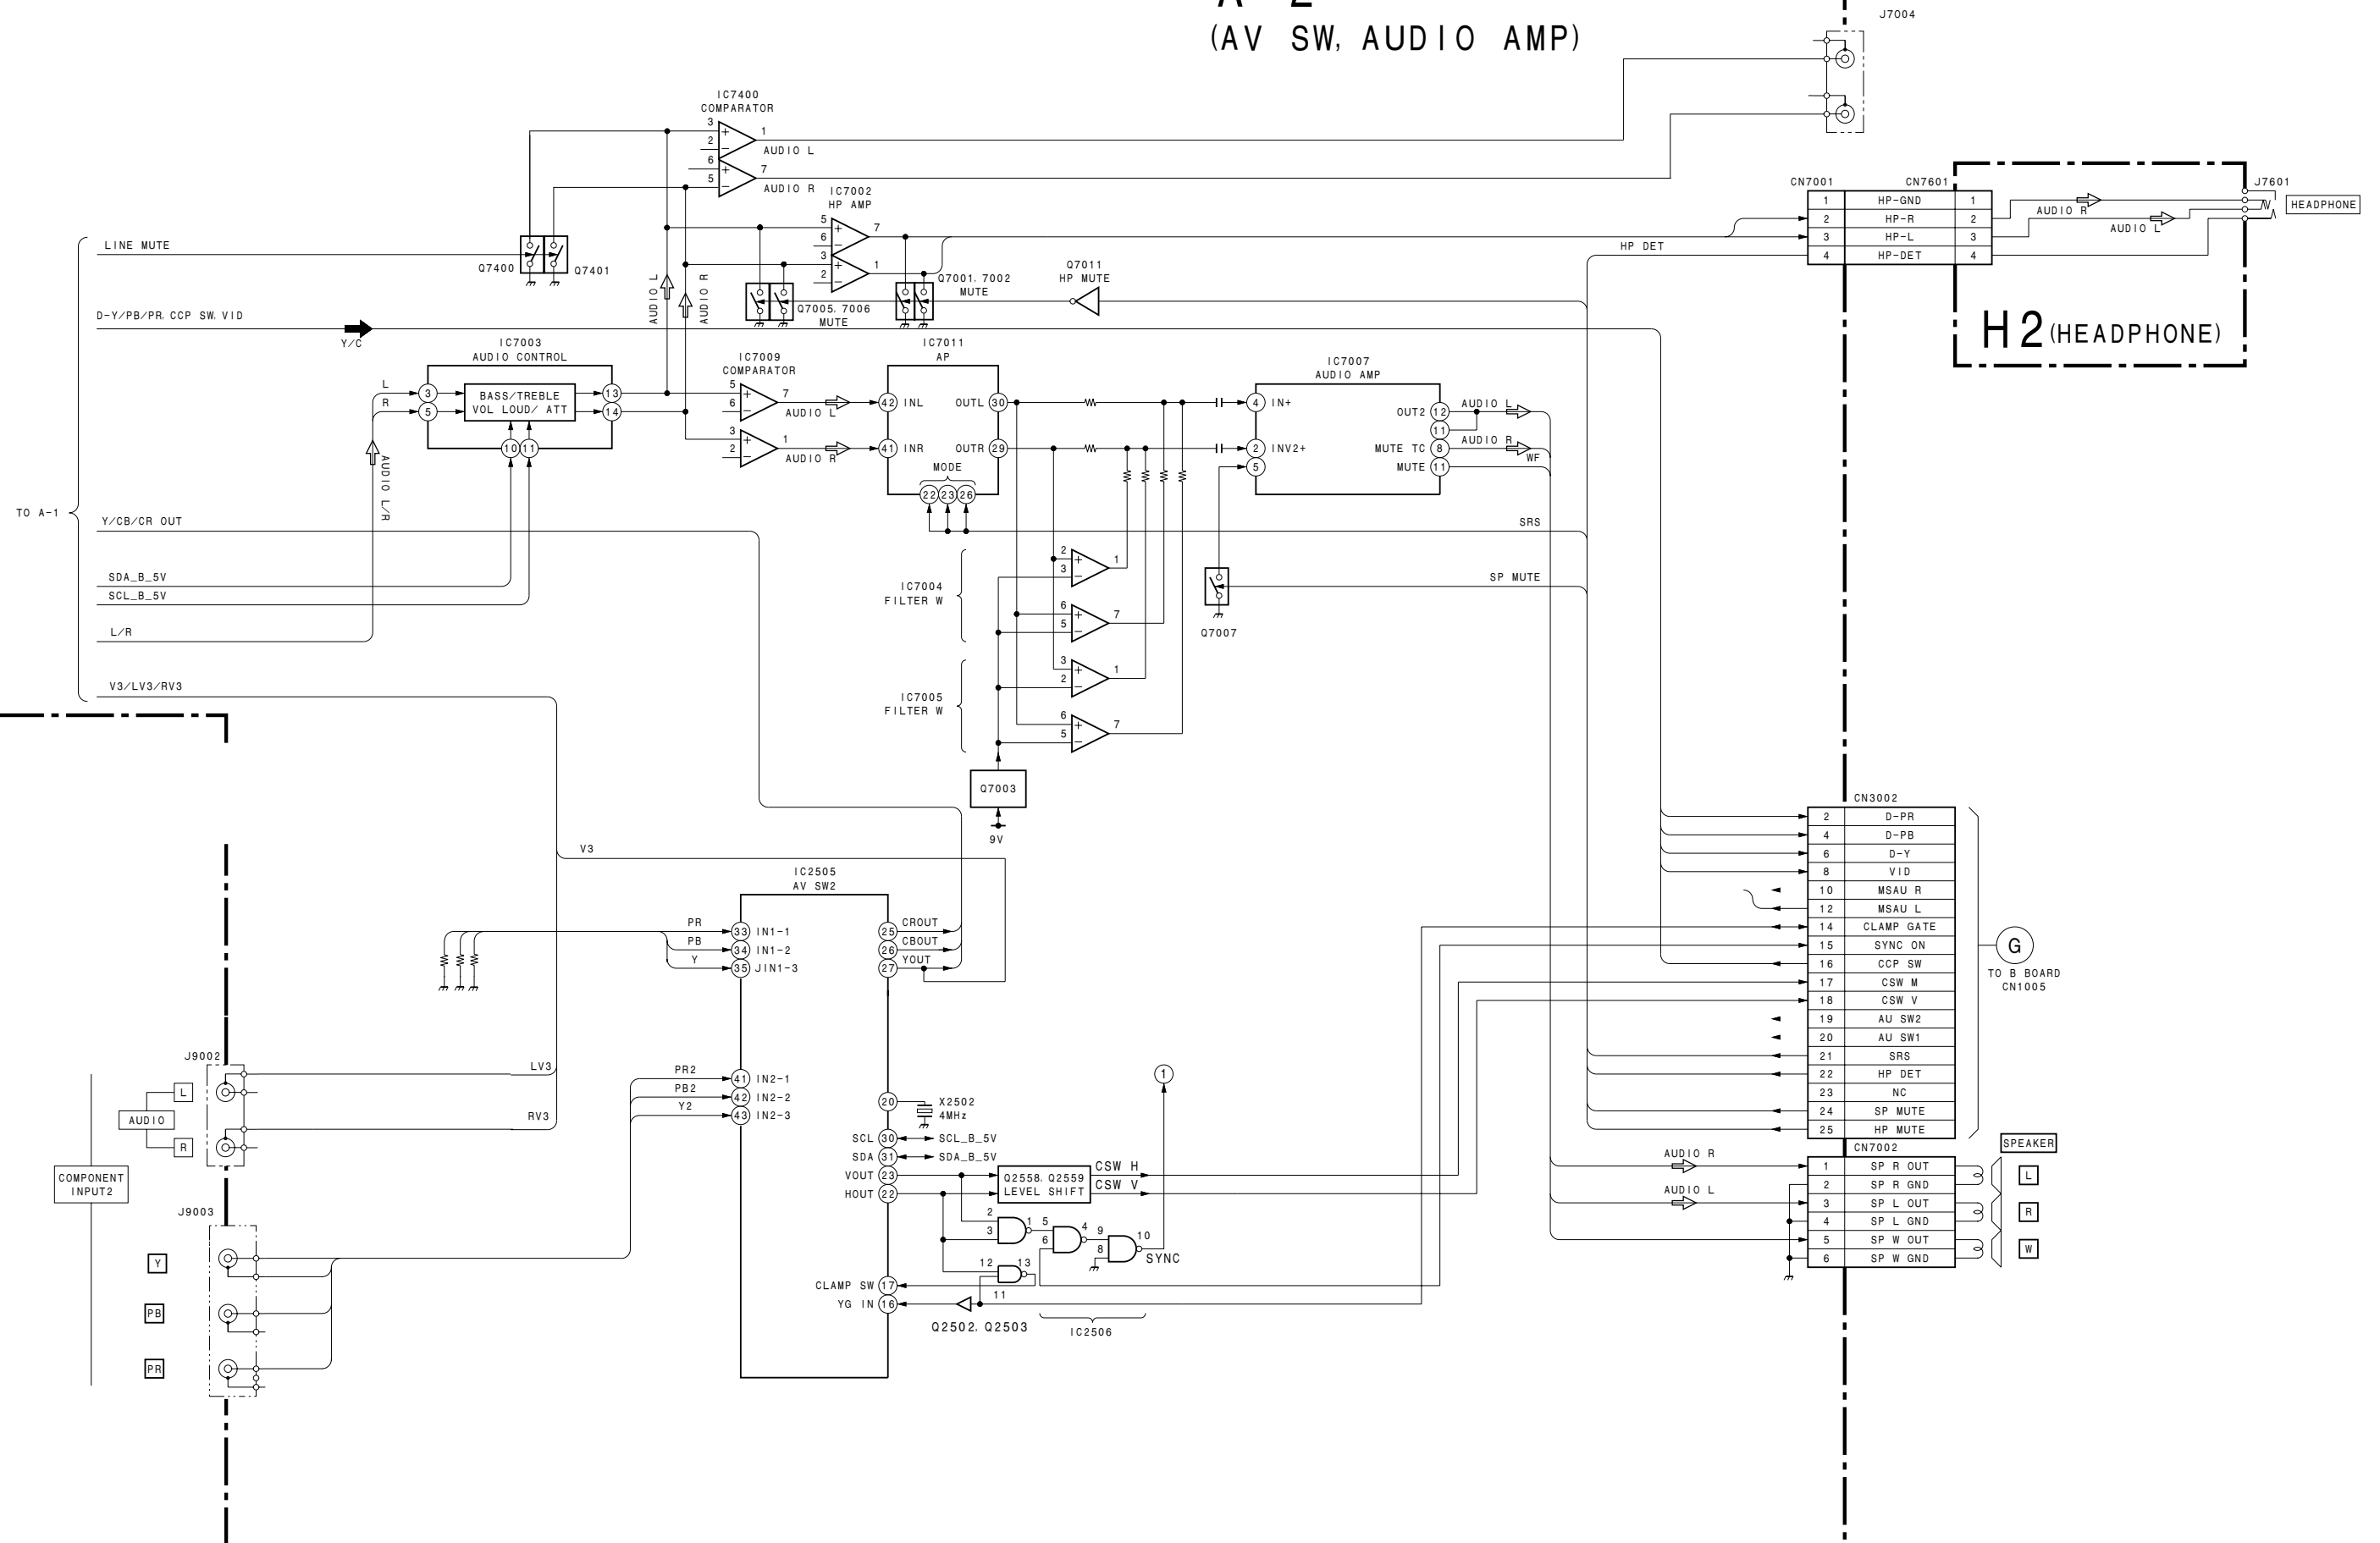

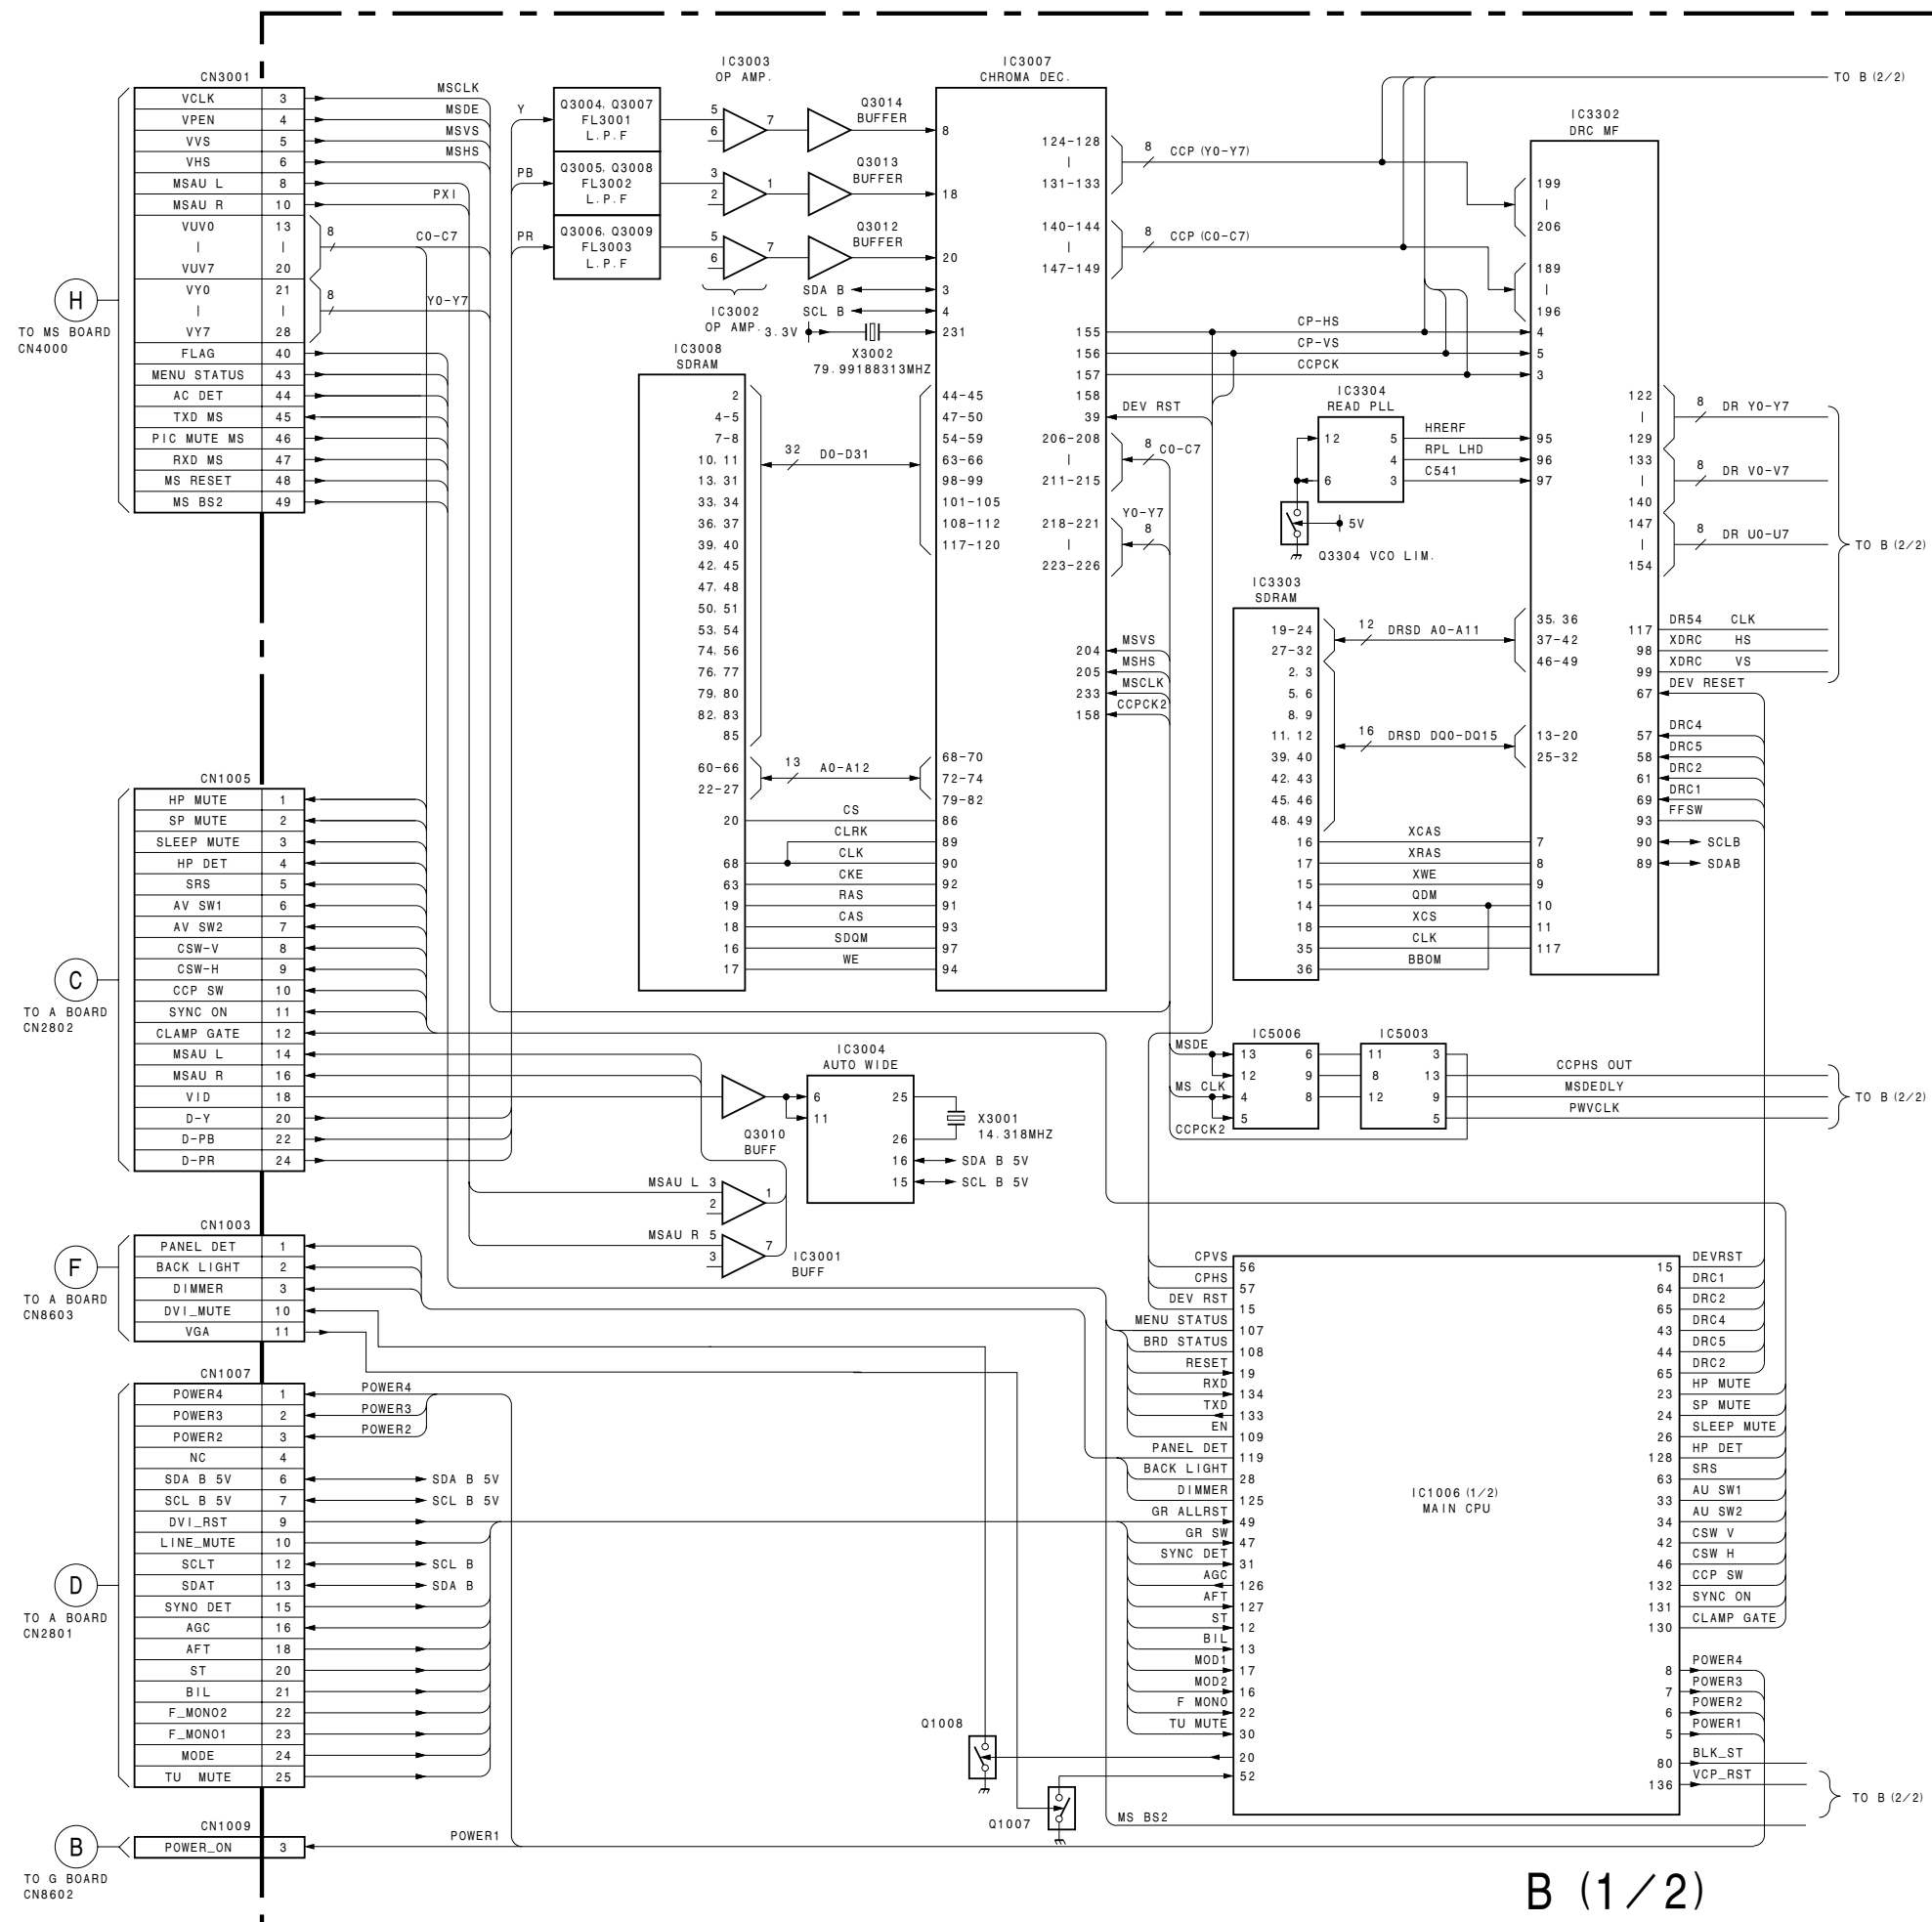




3-2. FRAME DIAGRAM

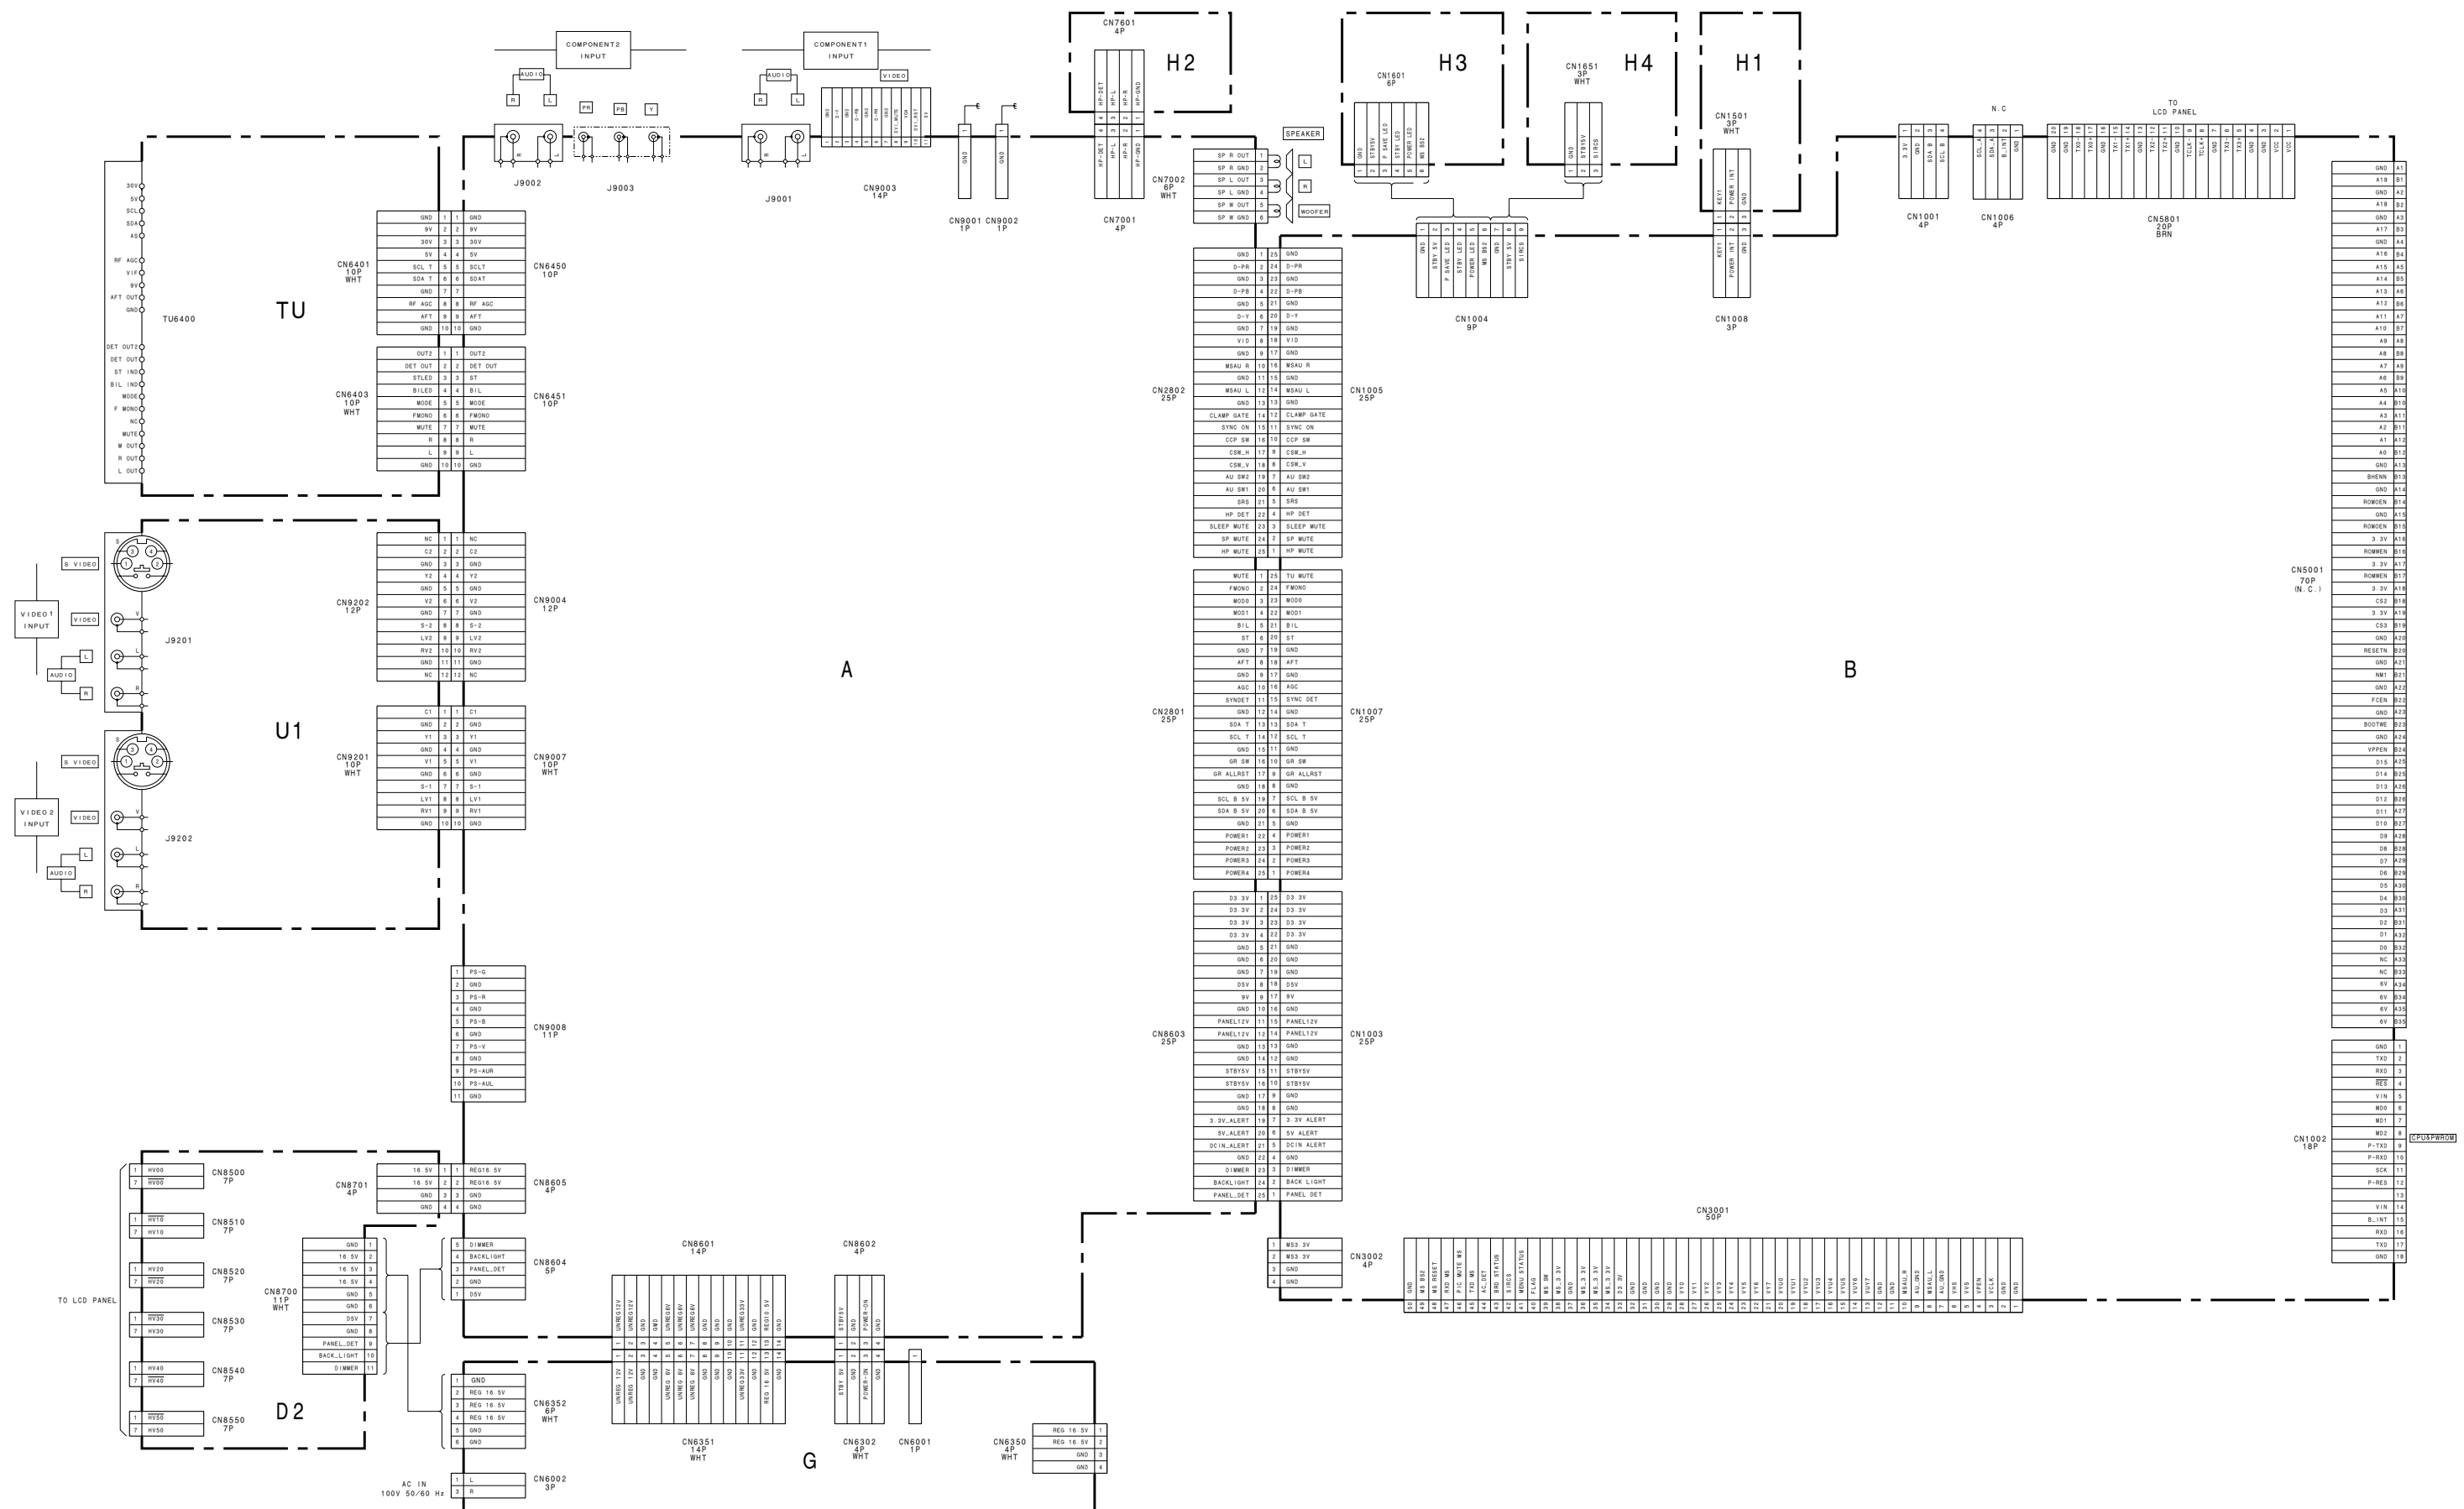

3-3. CIRCUIT BOARDS LOCATION

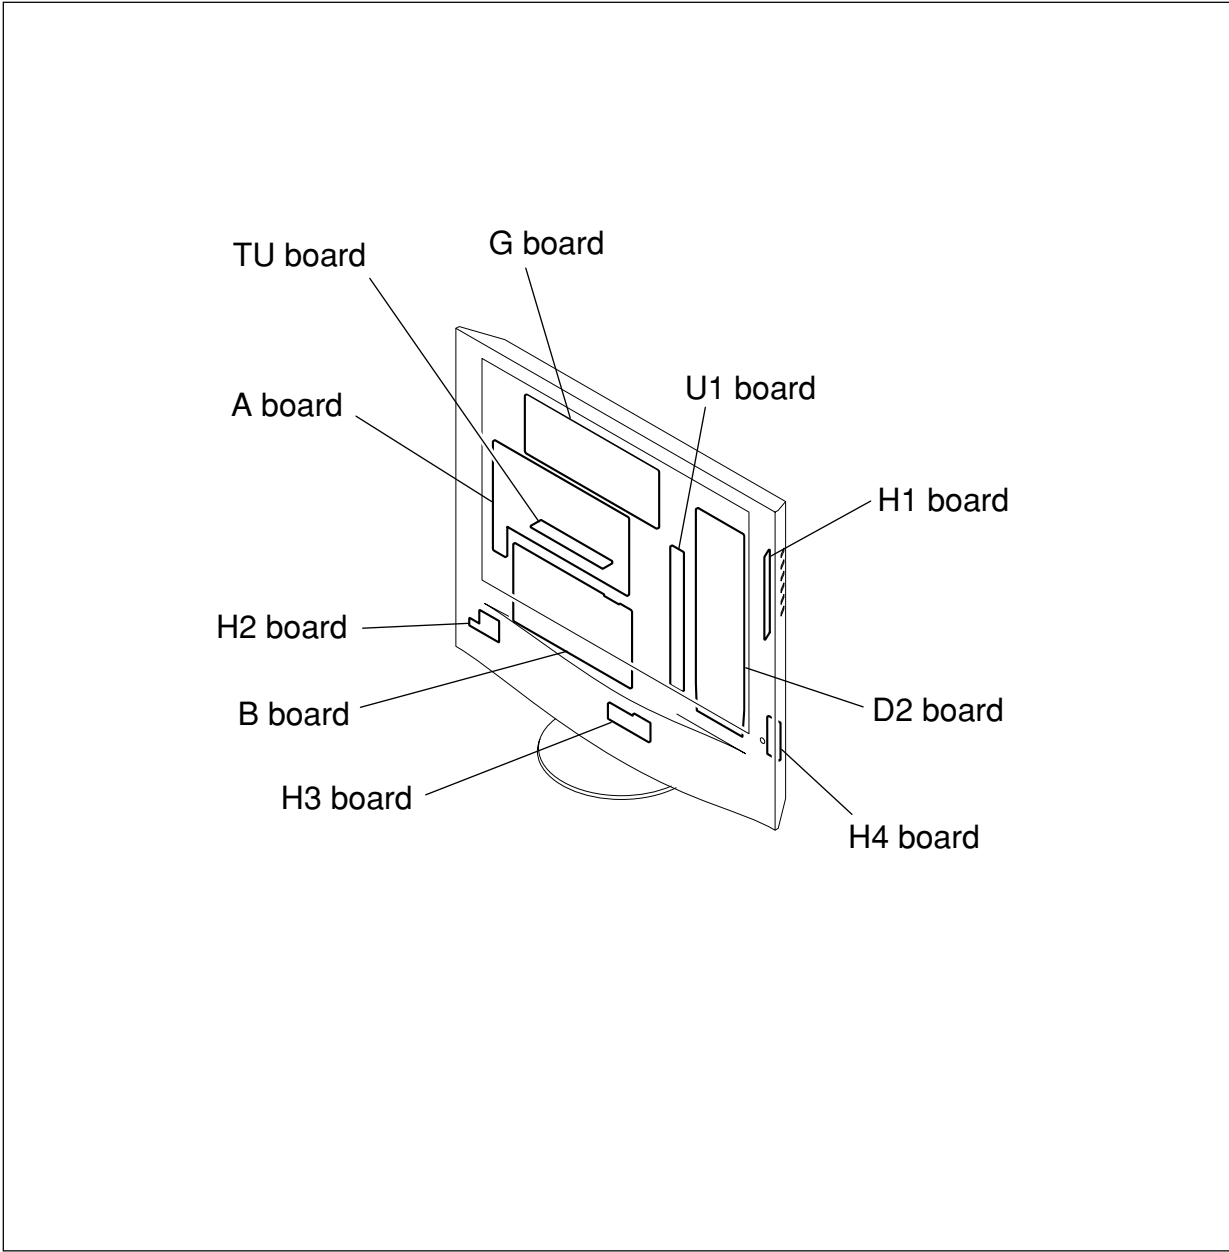

3-4. SCHEMATIC DIAGRAMS AND PRINTED WIRING BOARDS

- Note:**
- All capacitors are in μF unless otherwise noted. (pF : μF)
 - Capacitors without voltage indication are all 50 V.
 - Indication of resistance, which does not have one for rating electrical power, is as follows.

Pitch: 5 mm

Rating electrical power 1/4 W (CHIP : 1/10 W)
 - All resistors are in ohms.
 - : nonflammable resistor.
 - : fusible resistor.
 - \triangle : internal component.
 - : panel designation, and adjustment for repair.
 - All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
 - \perp : earth-ground.
 - : earth-chassis.
 - When replacing the part in below table, be sure to perform the related adjustment.
 - All voltages are in V.
 - Readings are taken with a 10 M digital multimeter.
 - Readings are taken with a color-bar signal input.
 - Voltage variations may be noted due to normal production tolerances.
 - * : Can not be measured.
 - Circled numbers are waveform references.**
 - : B + bus.
 - : B - bus.
 - : Signal path.


Note: The components identified by shading and mark \triangle are critical for safety. Replace only with part number specified.


Note: Les composants identifiés par un tramé et une marque \triangle sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

Terminal name of semiconductors in silk screen printed circuit (※)


| | Device | Printed symbol | Terminal name | Circuit |
|---|------------------------|----------------|------------------------------------|---------|
| ① | Transistor | | Collector Base Emitter | |
| ② | Transistor | | Collector Base Emitter | |
| ③ | Diode | | Cathode Anode | |
| ④ | Diode | | Cathode Anode (NC) | |
| ⑤ | Diode | | Cathode Anode (NC) | |
| ⑥ | Diode | | Common Anode Cathode | |
| ⑦ | Diode | | Common Anode Cathode | |
| ⑧ | Diode | | Common Anode Anode | |
| ⑨ | Diode | | Common Anode Anode | |
| ⑩ | Diode | | Common Cathode Cathode | |
| ⑪ | Diode | | Common Cathode Cathode | |
| ⑫ | Diode | | Anode Anode Cathode Anode | |
| ⑬ | Transistor (FET) | | Drain Source Gate | |
| ⑭ | Transistor (FET) | | Drain Source Gate | |
| ⑮ | Transistor (FET) | | Source Drain Gate | |
| ⑯ | Transistor | | Emitter Collector Base | |
| ⑰ | Transistor | | C2/B1/E1 E2/B2/C1 | |
| ⑱ | Transistor | | C1/B2/E2 E1/B1/C2 | |
| ⑲ | Transistor | | C1 B2 E2 E1 B1 C2 | |
| ⑳ | Transistor | | C1 B2 E2 E1 B1 C2 | |
| ㉑ | Transistor | | E2 B1 E1 C2 C1(B2) | |
| ㉒ | Transistor | | (B2) B1 E1 E2 C1 C2 | |
| ㉓ | Transistor | | (B2) E2 E1 B1 C2 C1 | |
| — | Discrete semiconductor | | | |

(Chip semiconductors that are not actually used are included.) Ver.1.6



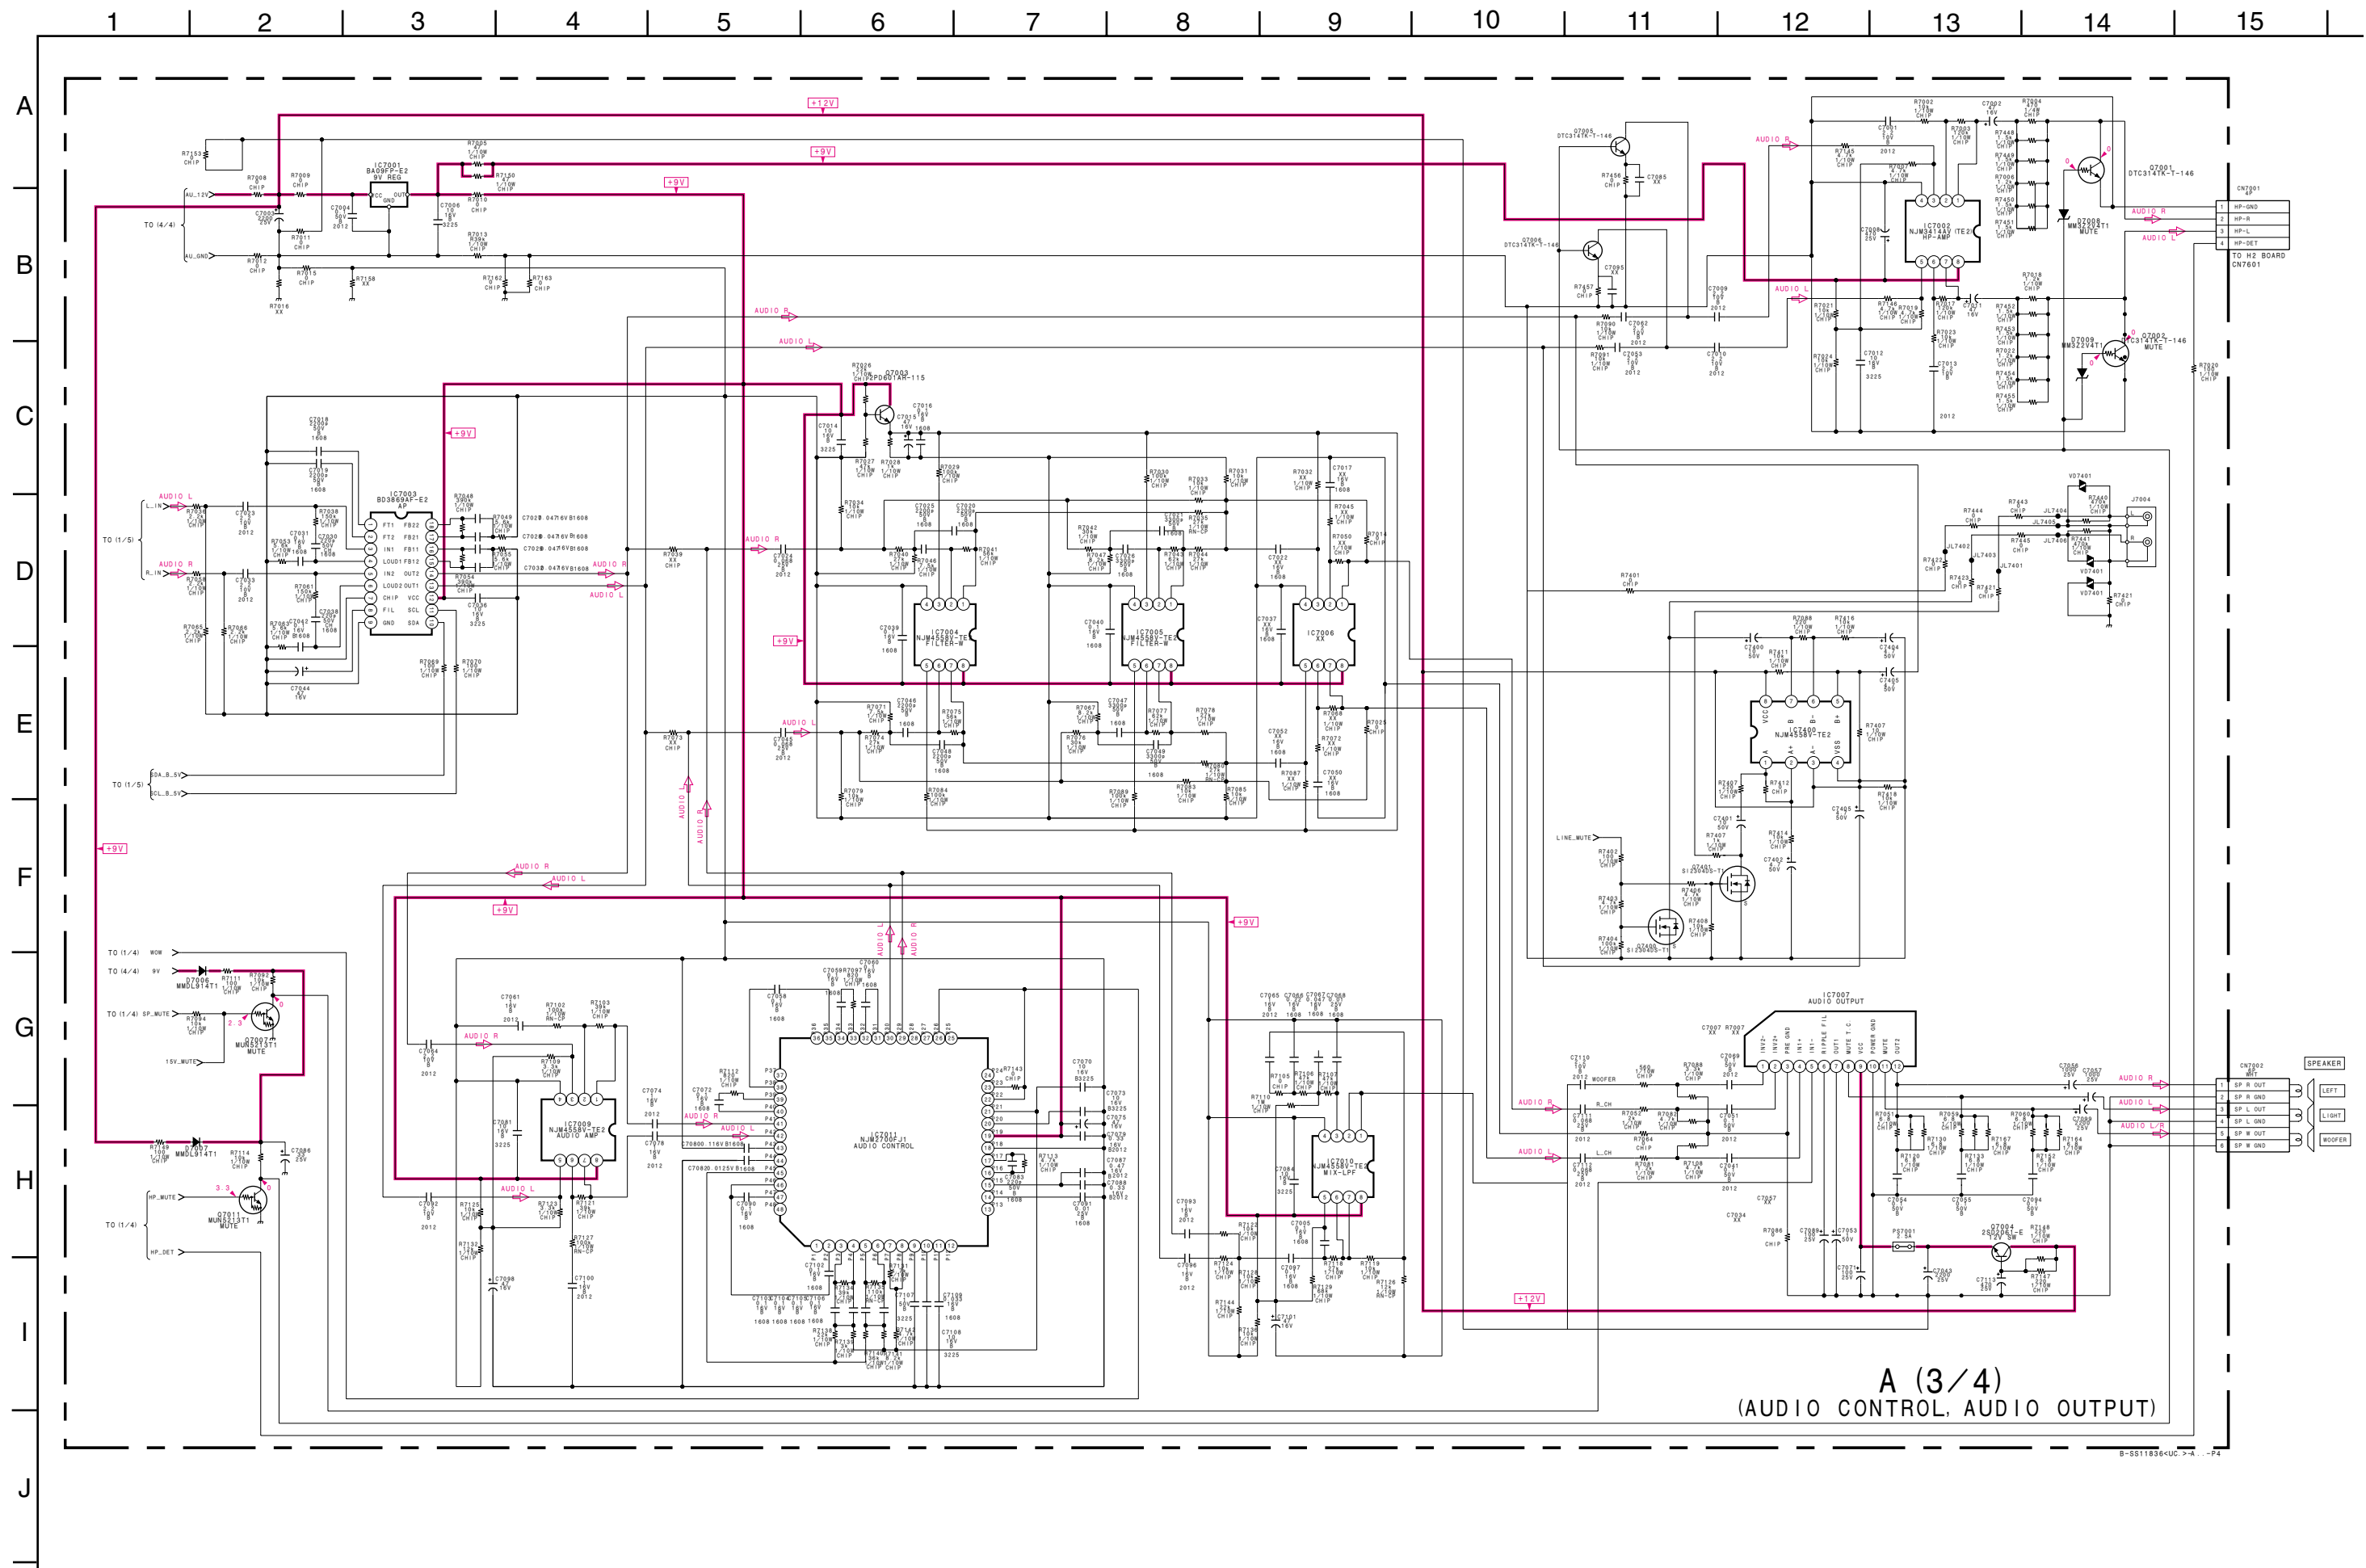


B-5511836-UC-2-A -P4

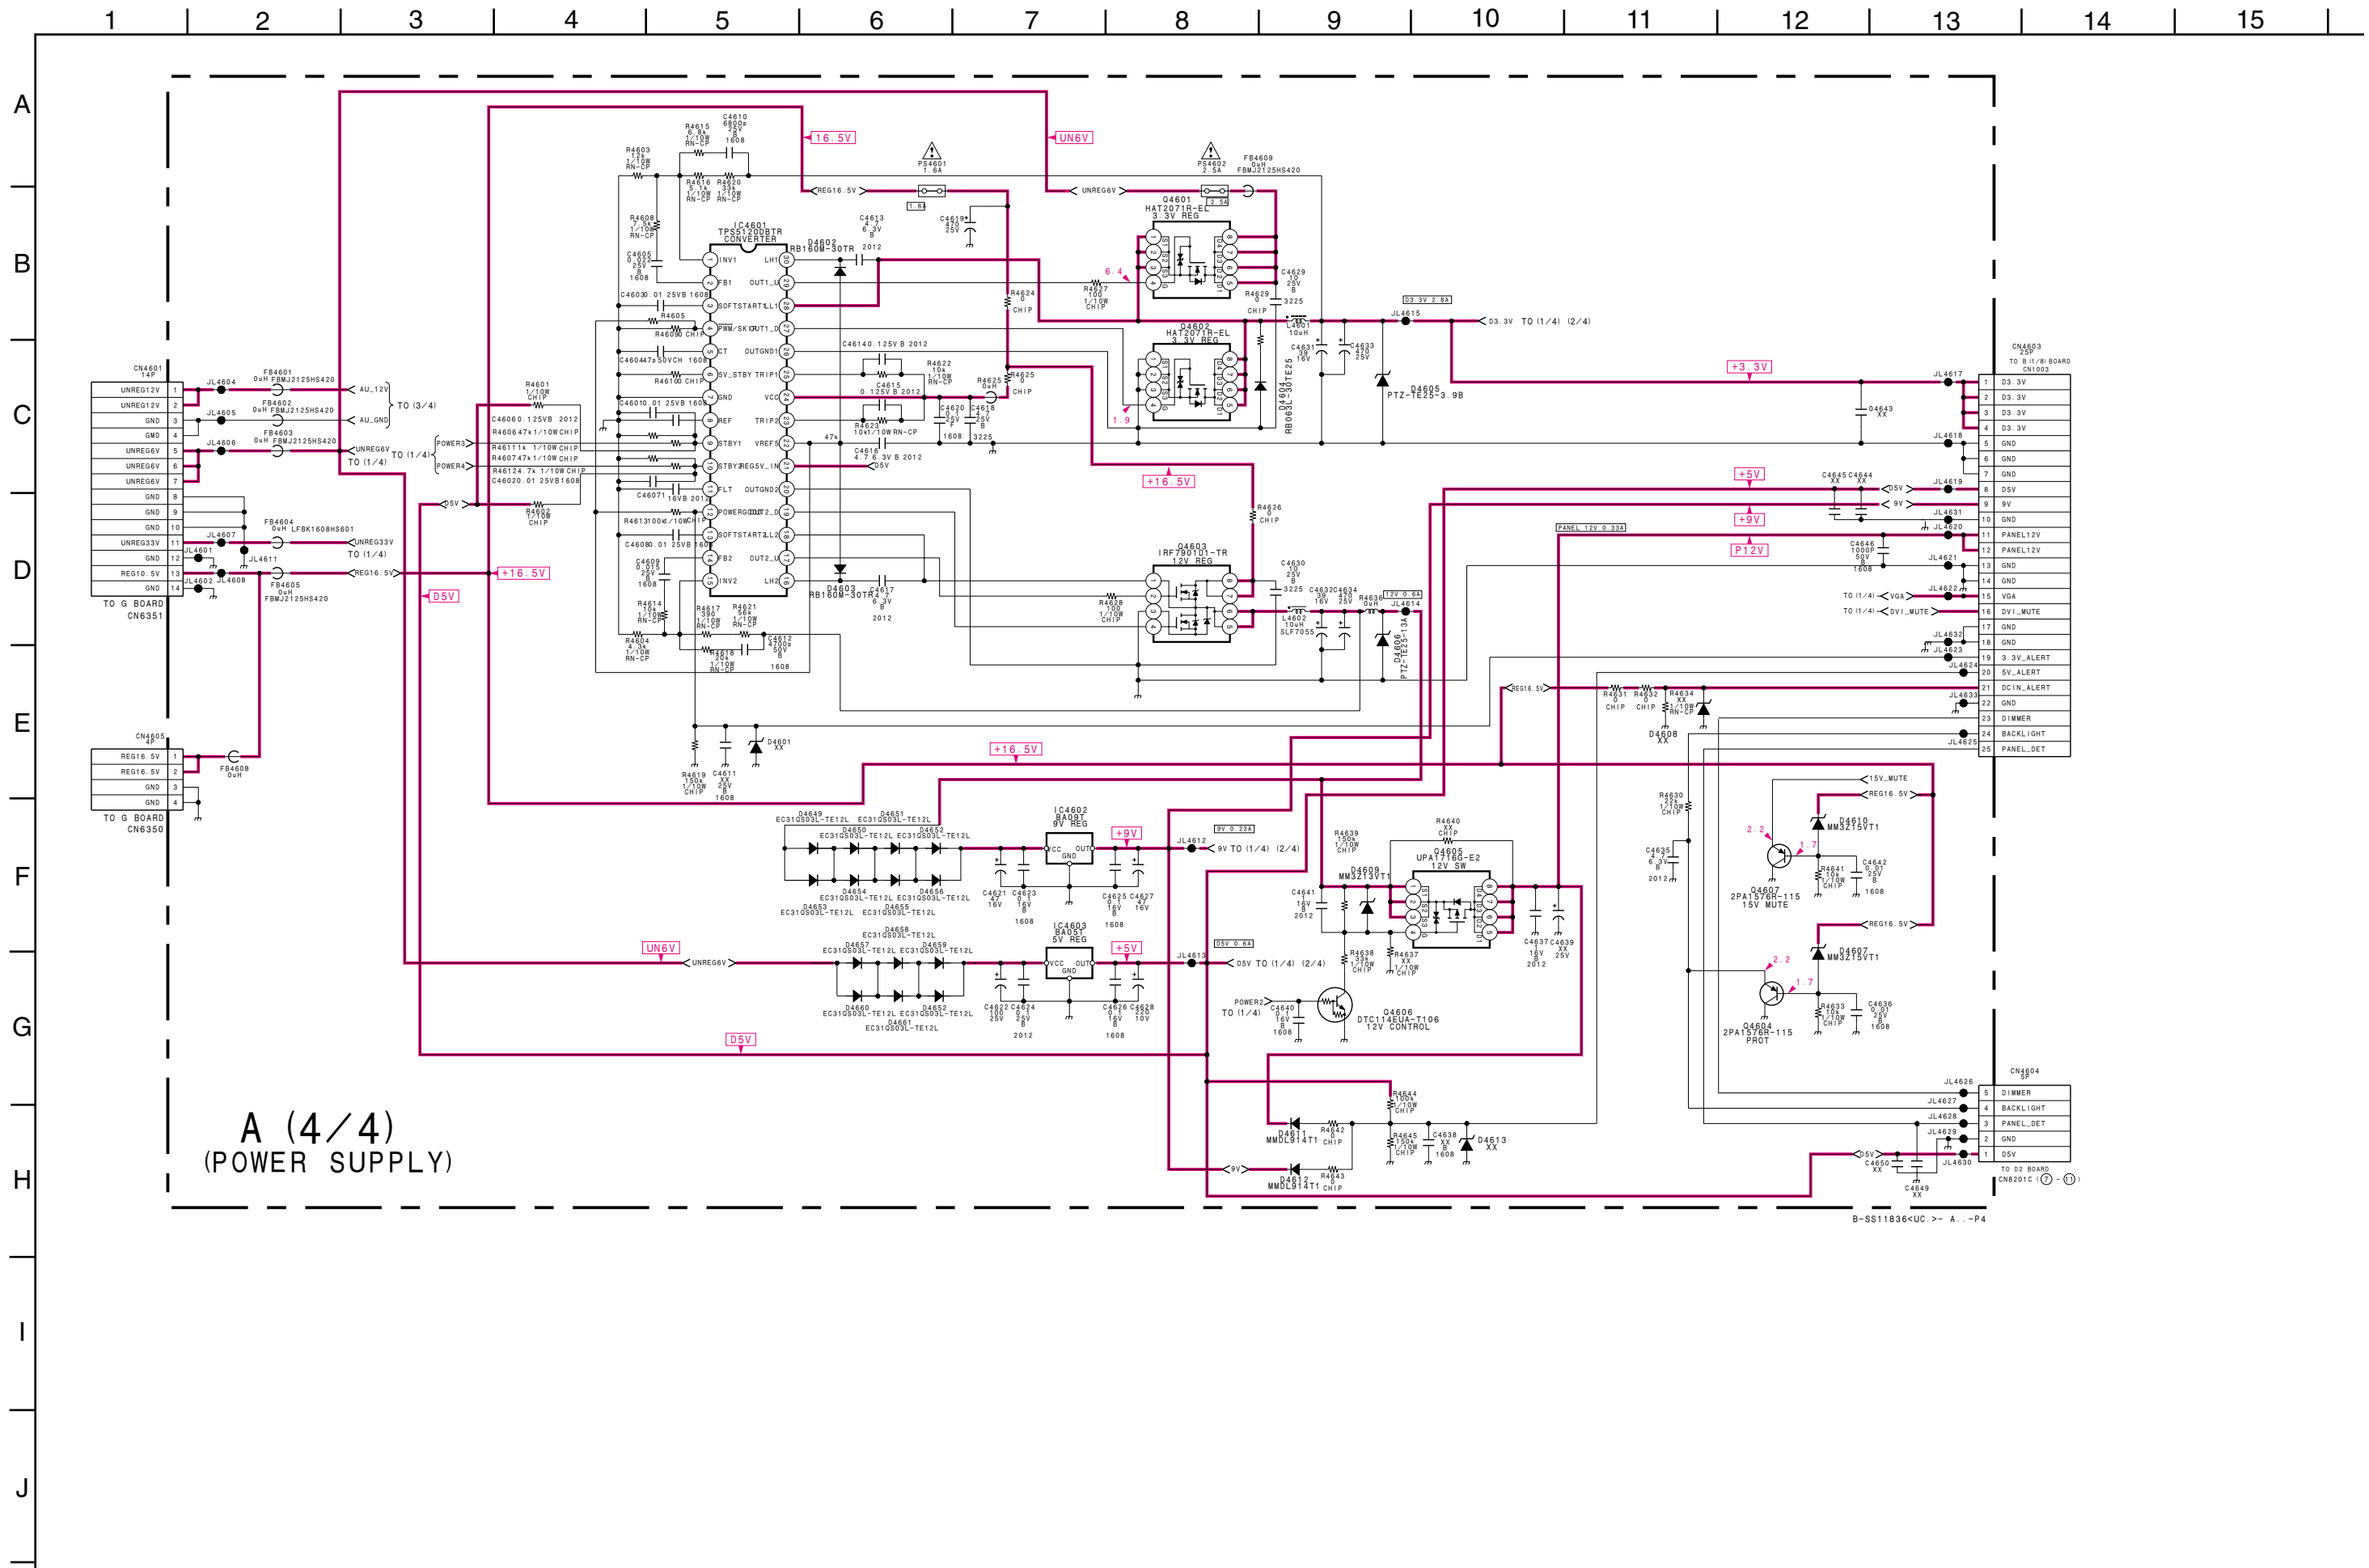


A [INPUT TERMINAL,AV SW,AUDIO AMP,POWER]

— A BOARD —

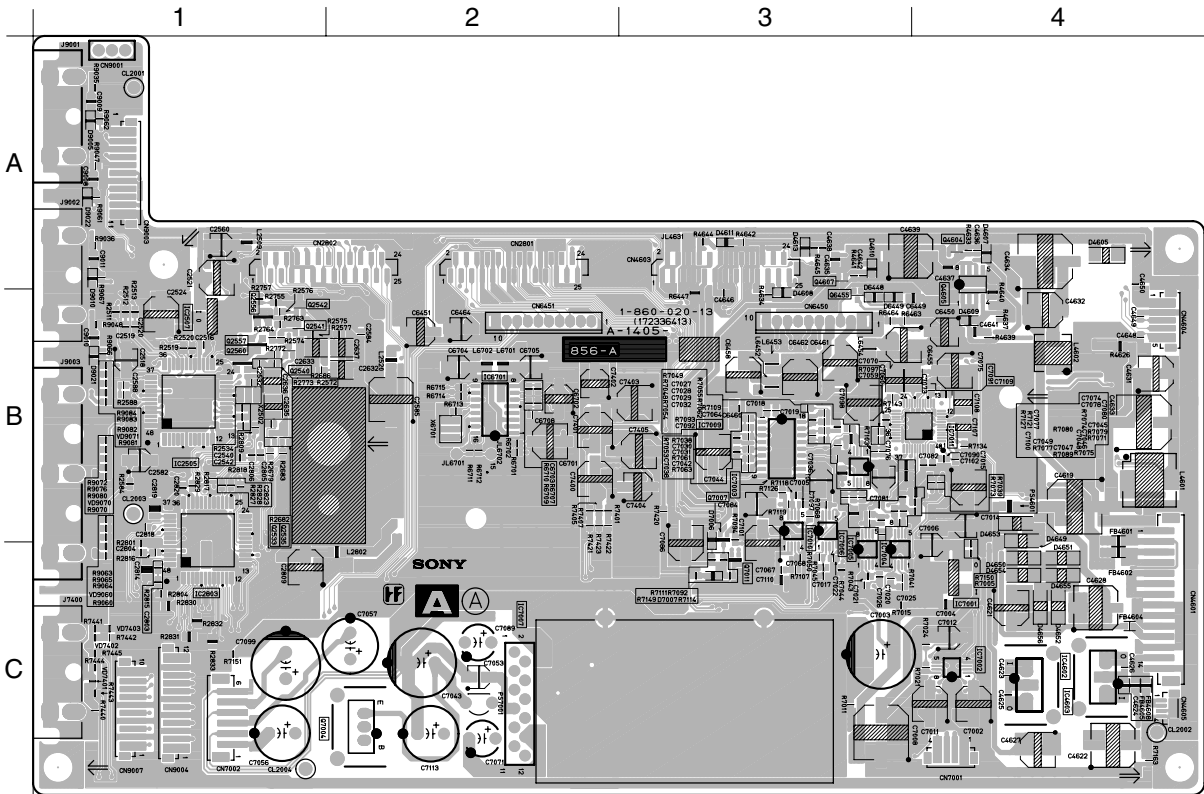



<COMPONENT SIDE>

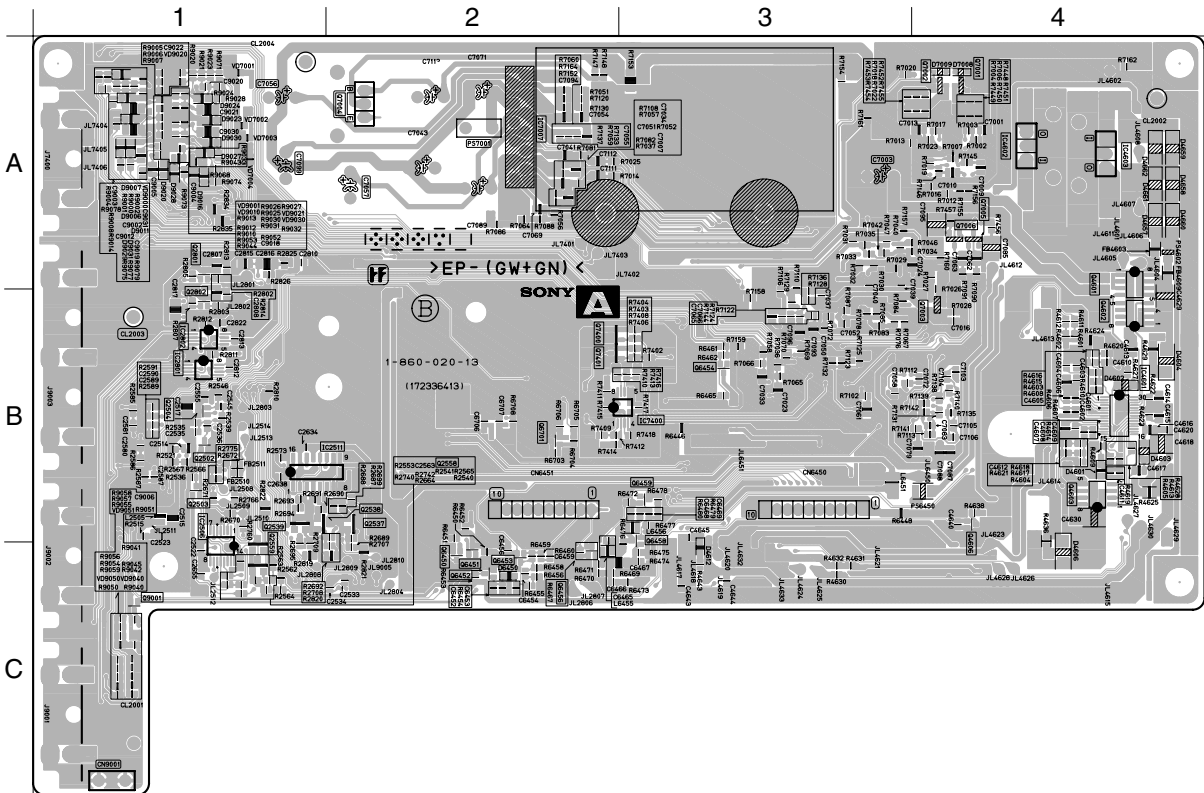



<CONDUCTOR SIDE>


A horizontal number line with 15 segments, numbered 1 to 15 from left to right. The segments are separated by vertical tick marks.









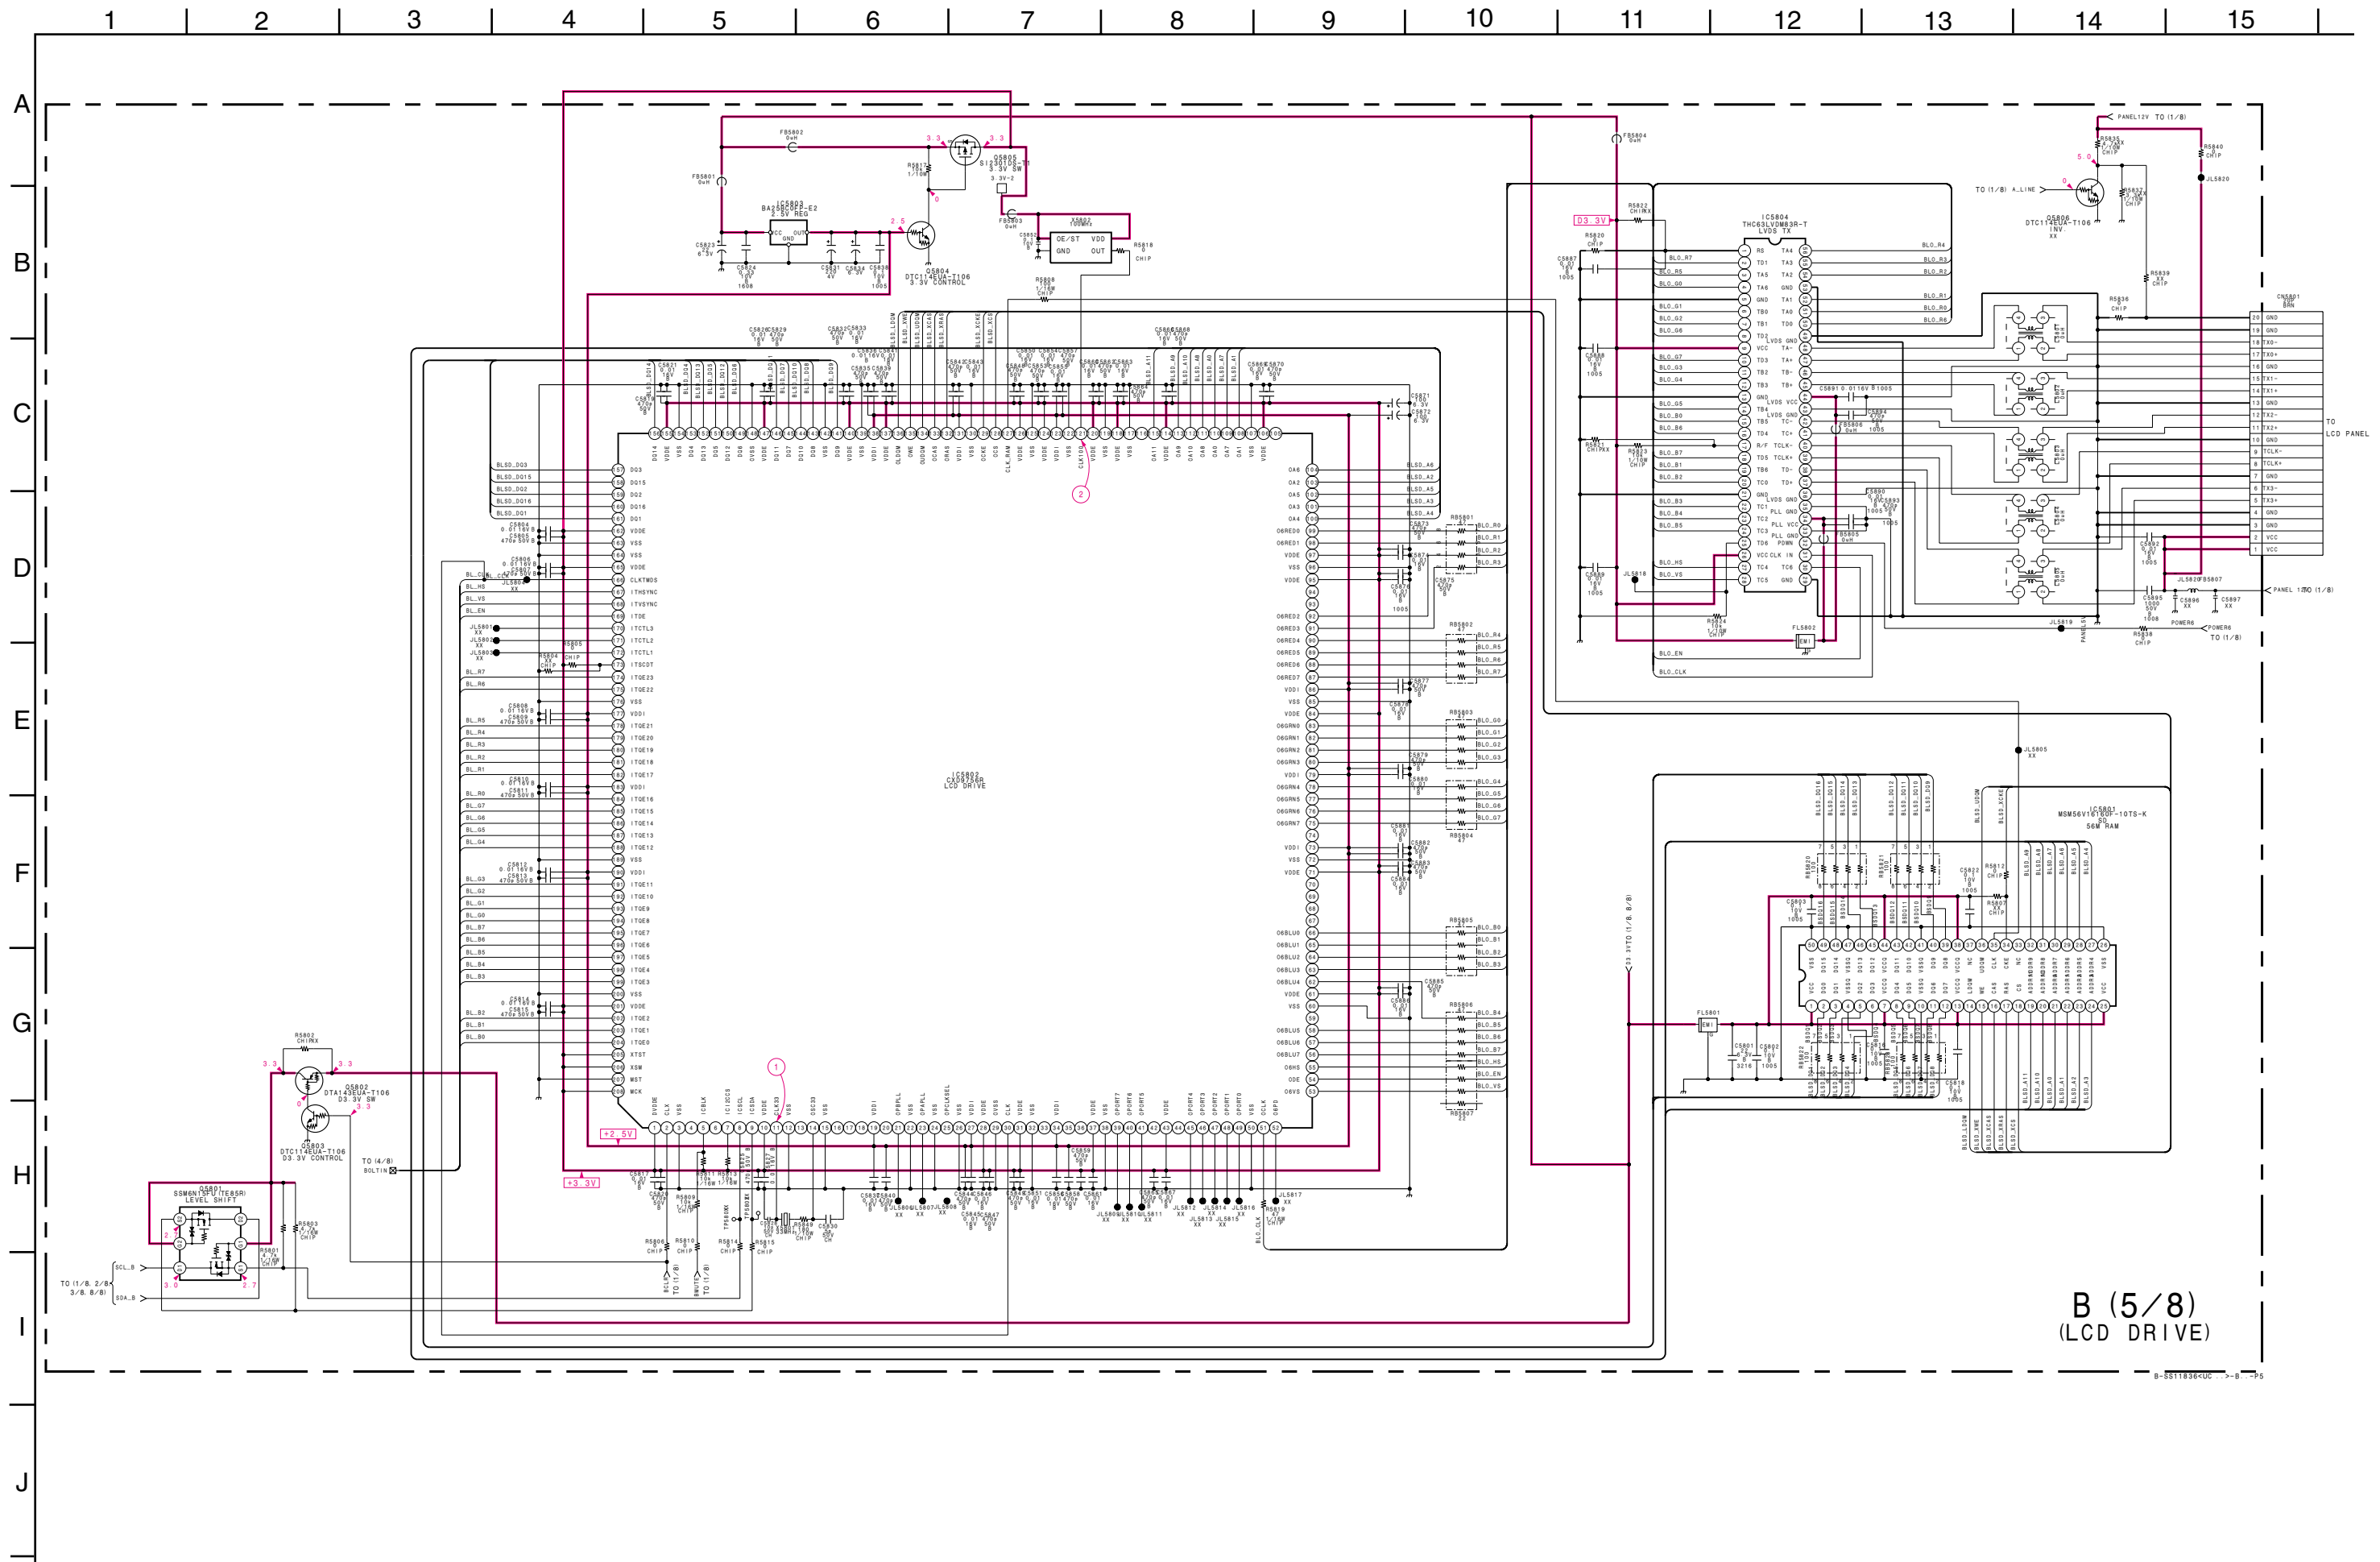






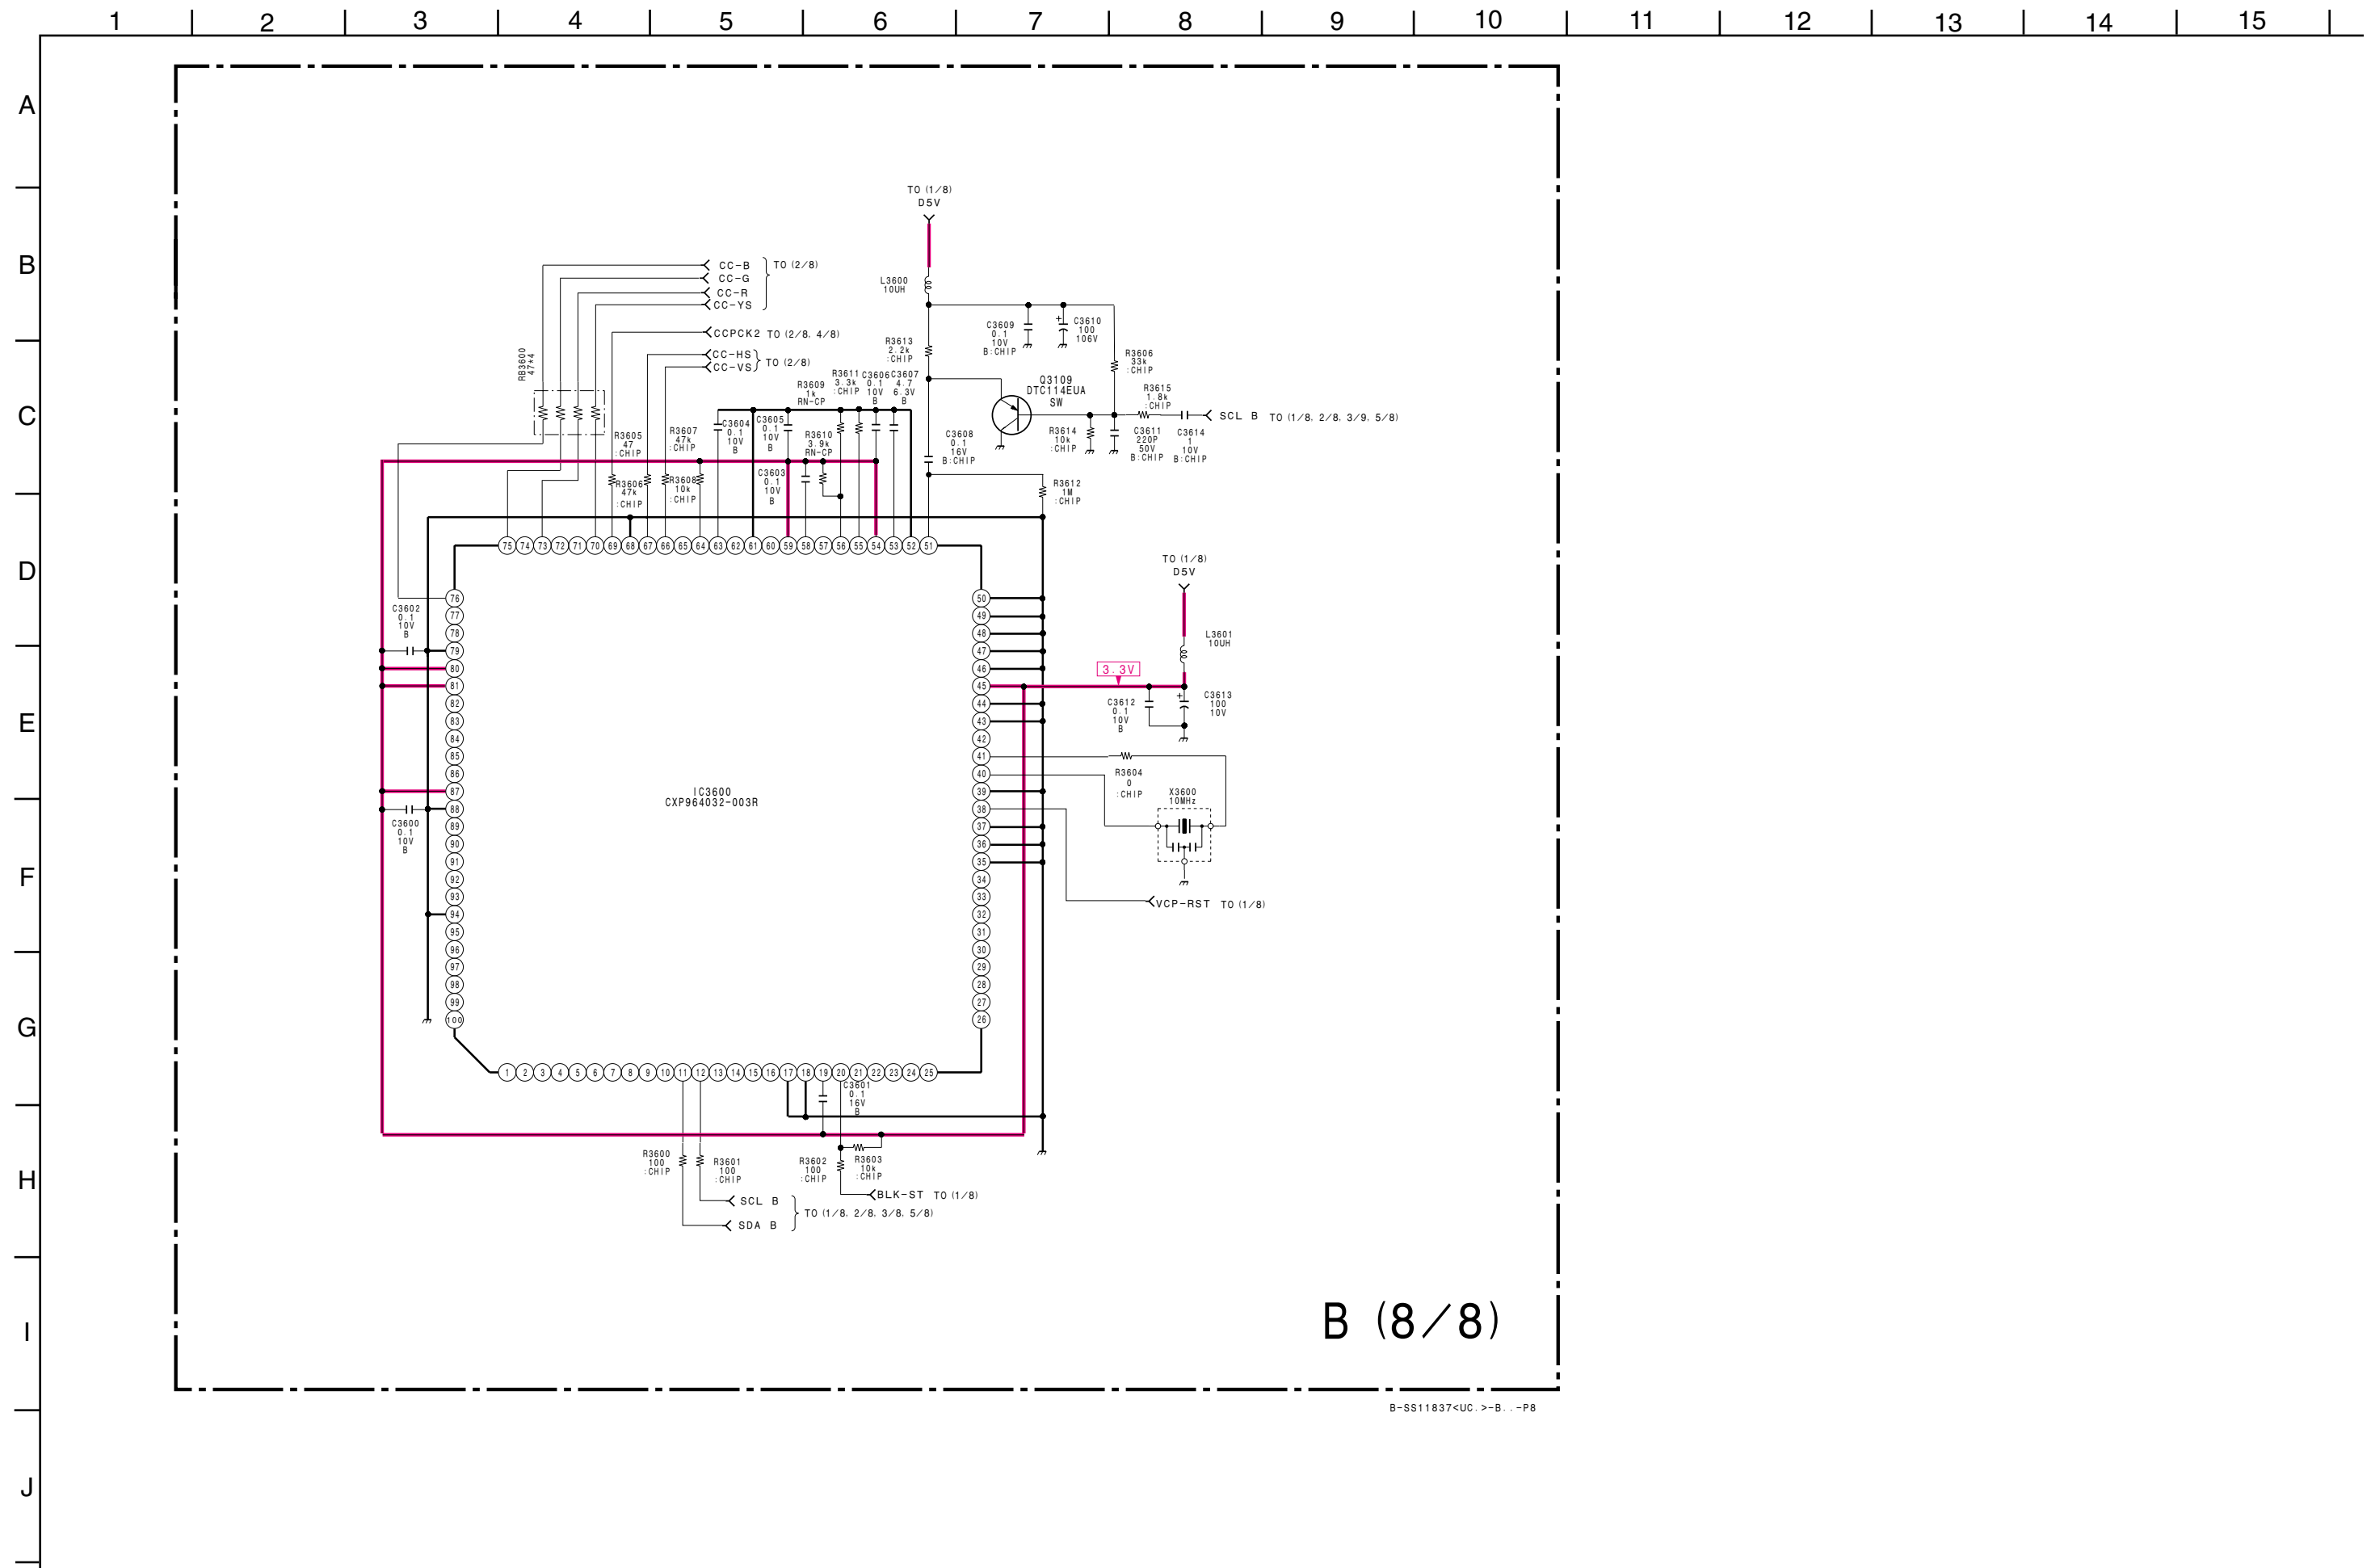


B

[MAIN CPU,CHROMA DEC.,3D COMB FILTER,DRC-MF,LCD DRIVE,SCAN CONV]

— B BOARD —

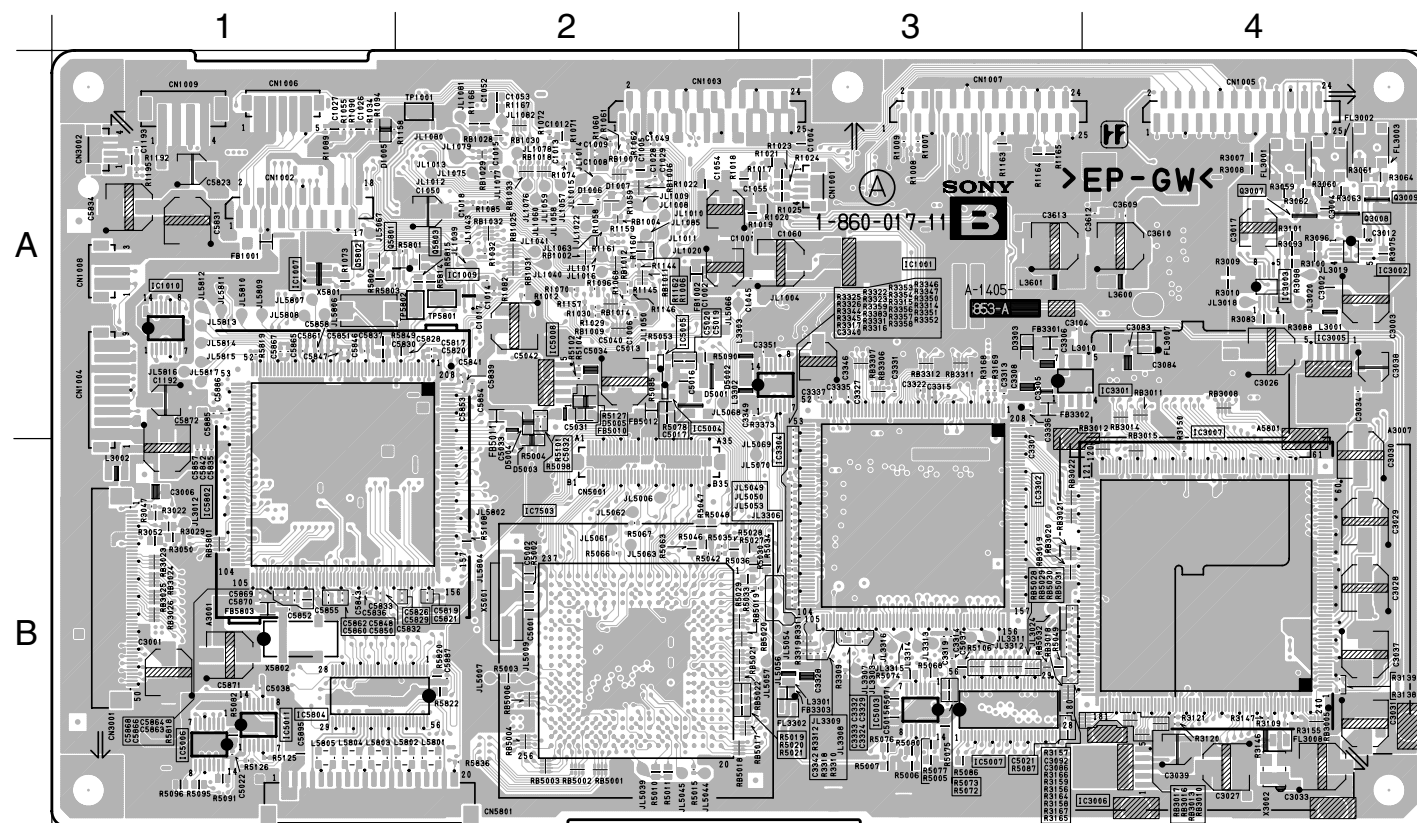

<COMPONENT SIDE>

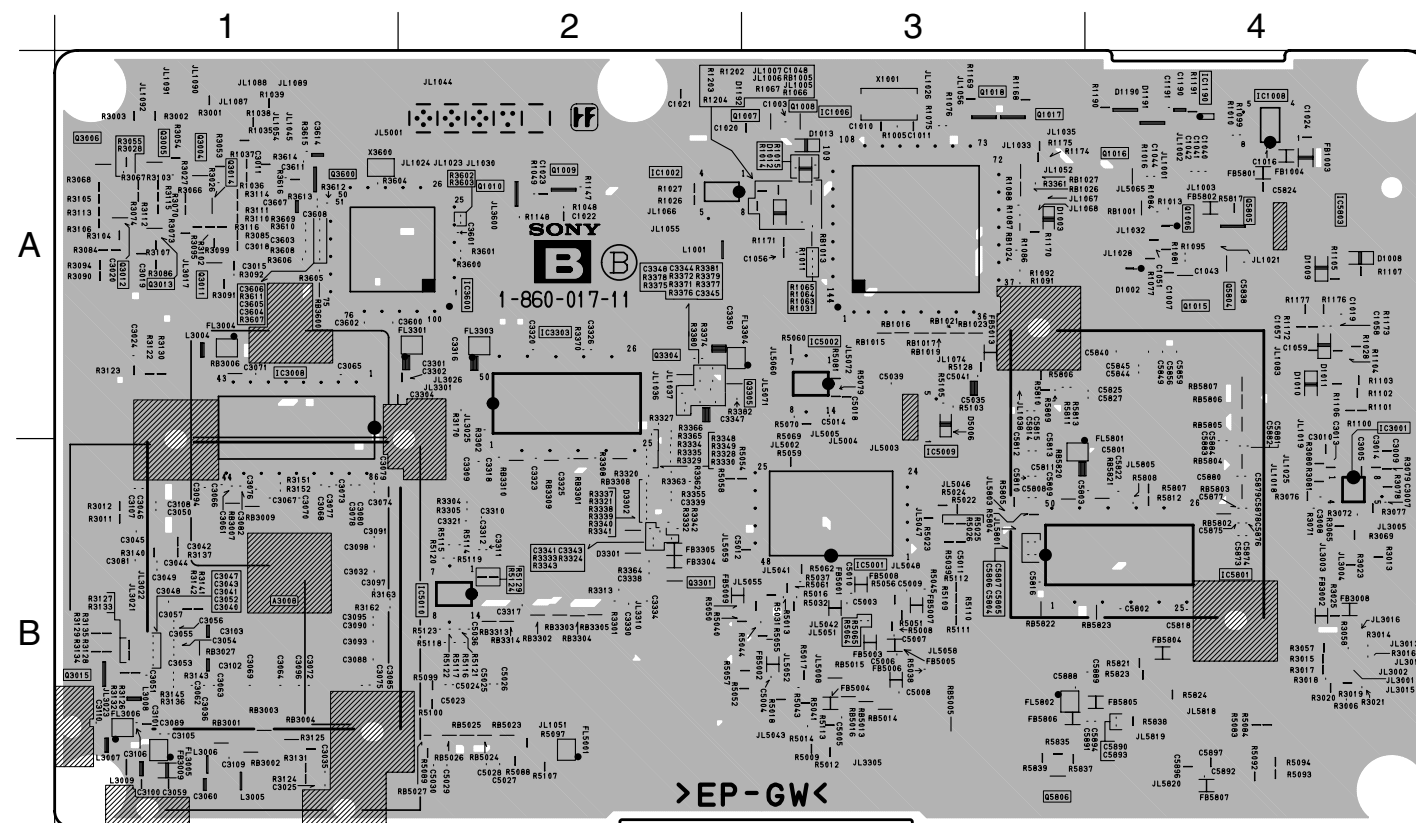


<CONDUCTOR SIDE>


D2

[INVERTER]

— D2 BOARD —

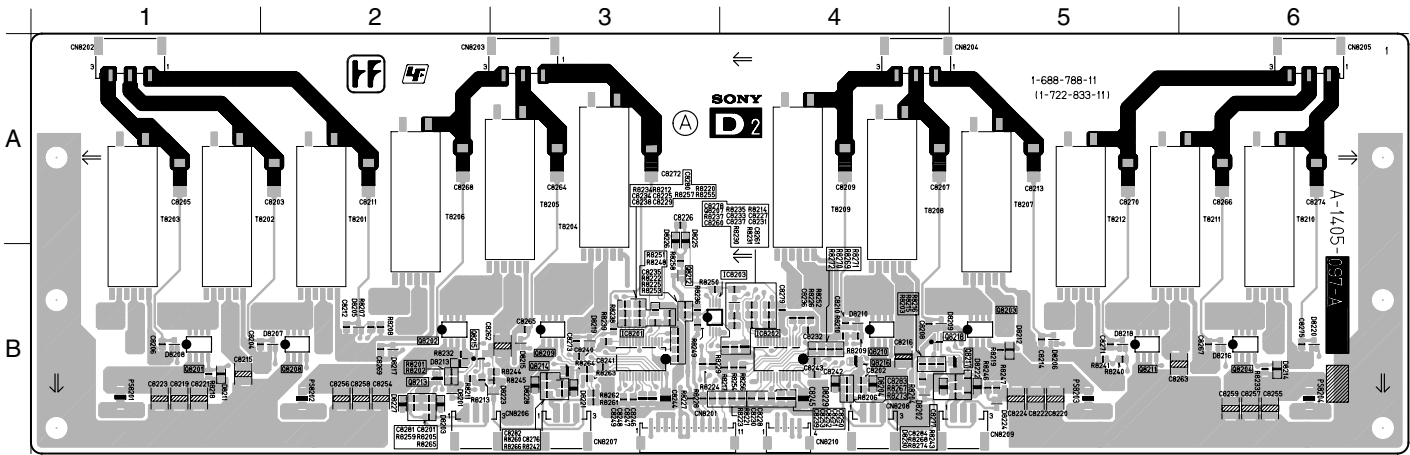

<COMPONENT SIDE>

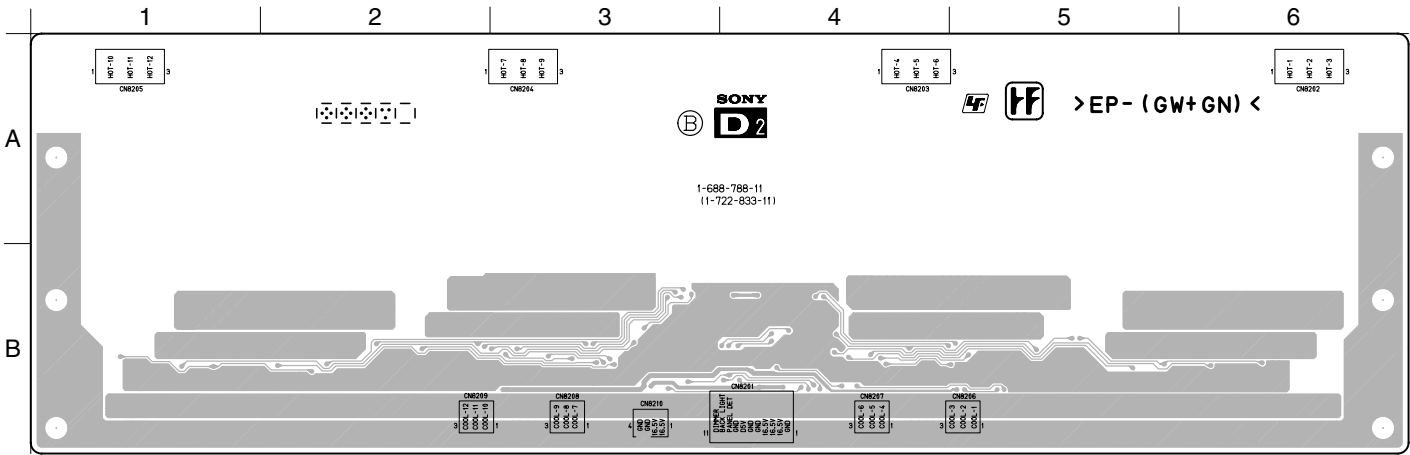


<CONDUCTOR SIDE>

• D2 BOARD SEMICONDUCTOR LOCATION

| IC | | DIODE | |
|------------------|------------------|------------------|------------------|
| (Component Side) | (Conductor Side) | (Component Side) | (Conductor Side) |
| IIC8201 | B-3 | D8201 | B-2 |
| IC8202 | B-4 | D8202 | B-4 |
| IC8203 | B-3 | D8203 | B-2 |
| TRANSISTOR | (Component Side) | D8204 | B-4 |
| | | D8205 | B-2 |
| | | D8206 | B-5 |
| | | D8207 | B-2 |
| | | D8208 | B-1 |
| | | D8209 | B-4 |
| | | D8210 | B-4 |
| | | D8211 | B-1 |
| | | D8212 | B-5 |
| | | D8213 | B-2 |
| | | D8214 | B-6 |
| | | D8215 | B-3 |
| | | D8216 | B-6 |
| | | D8217 | B-2 |
| | | D8218 | B-5 |
| | | D8219 | B-3 |
| | | D8220 | B-6 |
| | | D8221 | B-3 |
| | | D8222 | B-5 |
| | | D8223 | B-3 |
| Q8201 | B-1 | D8224 | B-5 |
| Q8202 | B-2 | D8225 | B-3 |
| Q8203 | B-5 | D8226 | B-3 |
| Q8204 | B-6 | D8227 | B-2 |
| Q8207 | B-4 | D8228 | B-3 |
| Q8208 | B-2 | D8229 | B-4 |
| Q8209 | B-3 | D8230 | B-4 |
| Q8210 | B-4 | | |
| Q8211 | B-5 | | |
| Q8212 | B-3 | | |
| Q8213 | B-2 | | |
| Q8214 | B-3 | | |
| Q8215 | B-2 | | |
| Q8216 | B-4 | | |
| Q8217 | B-5 | | |
| Q8218 | B-4 | | |



*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 3-7)

(4) Schematic Diagram of G Board

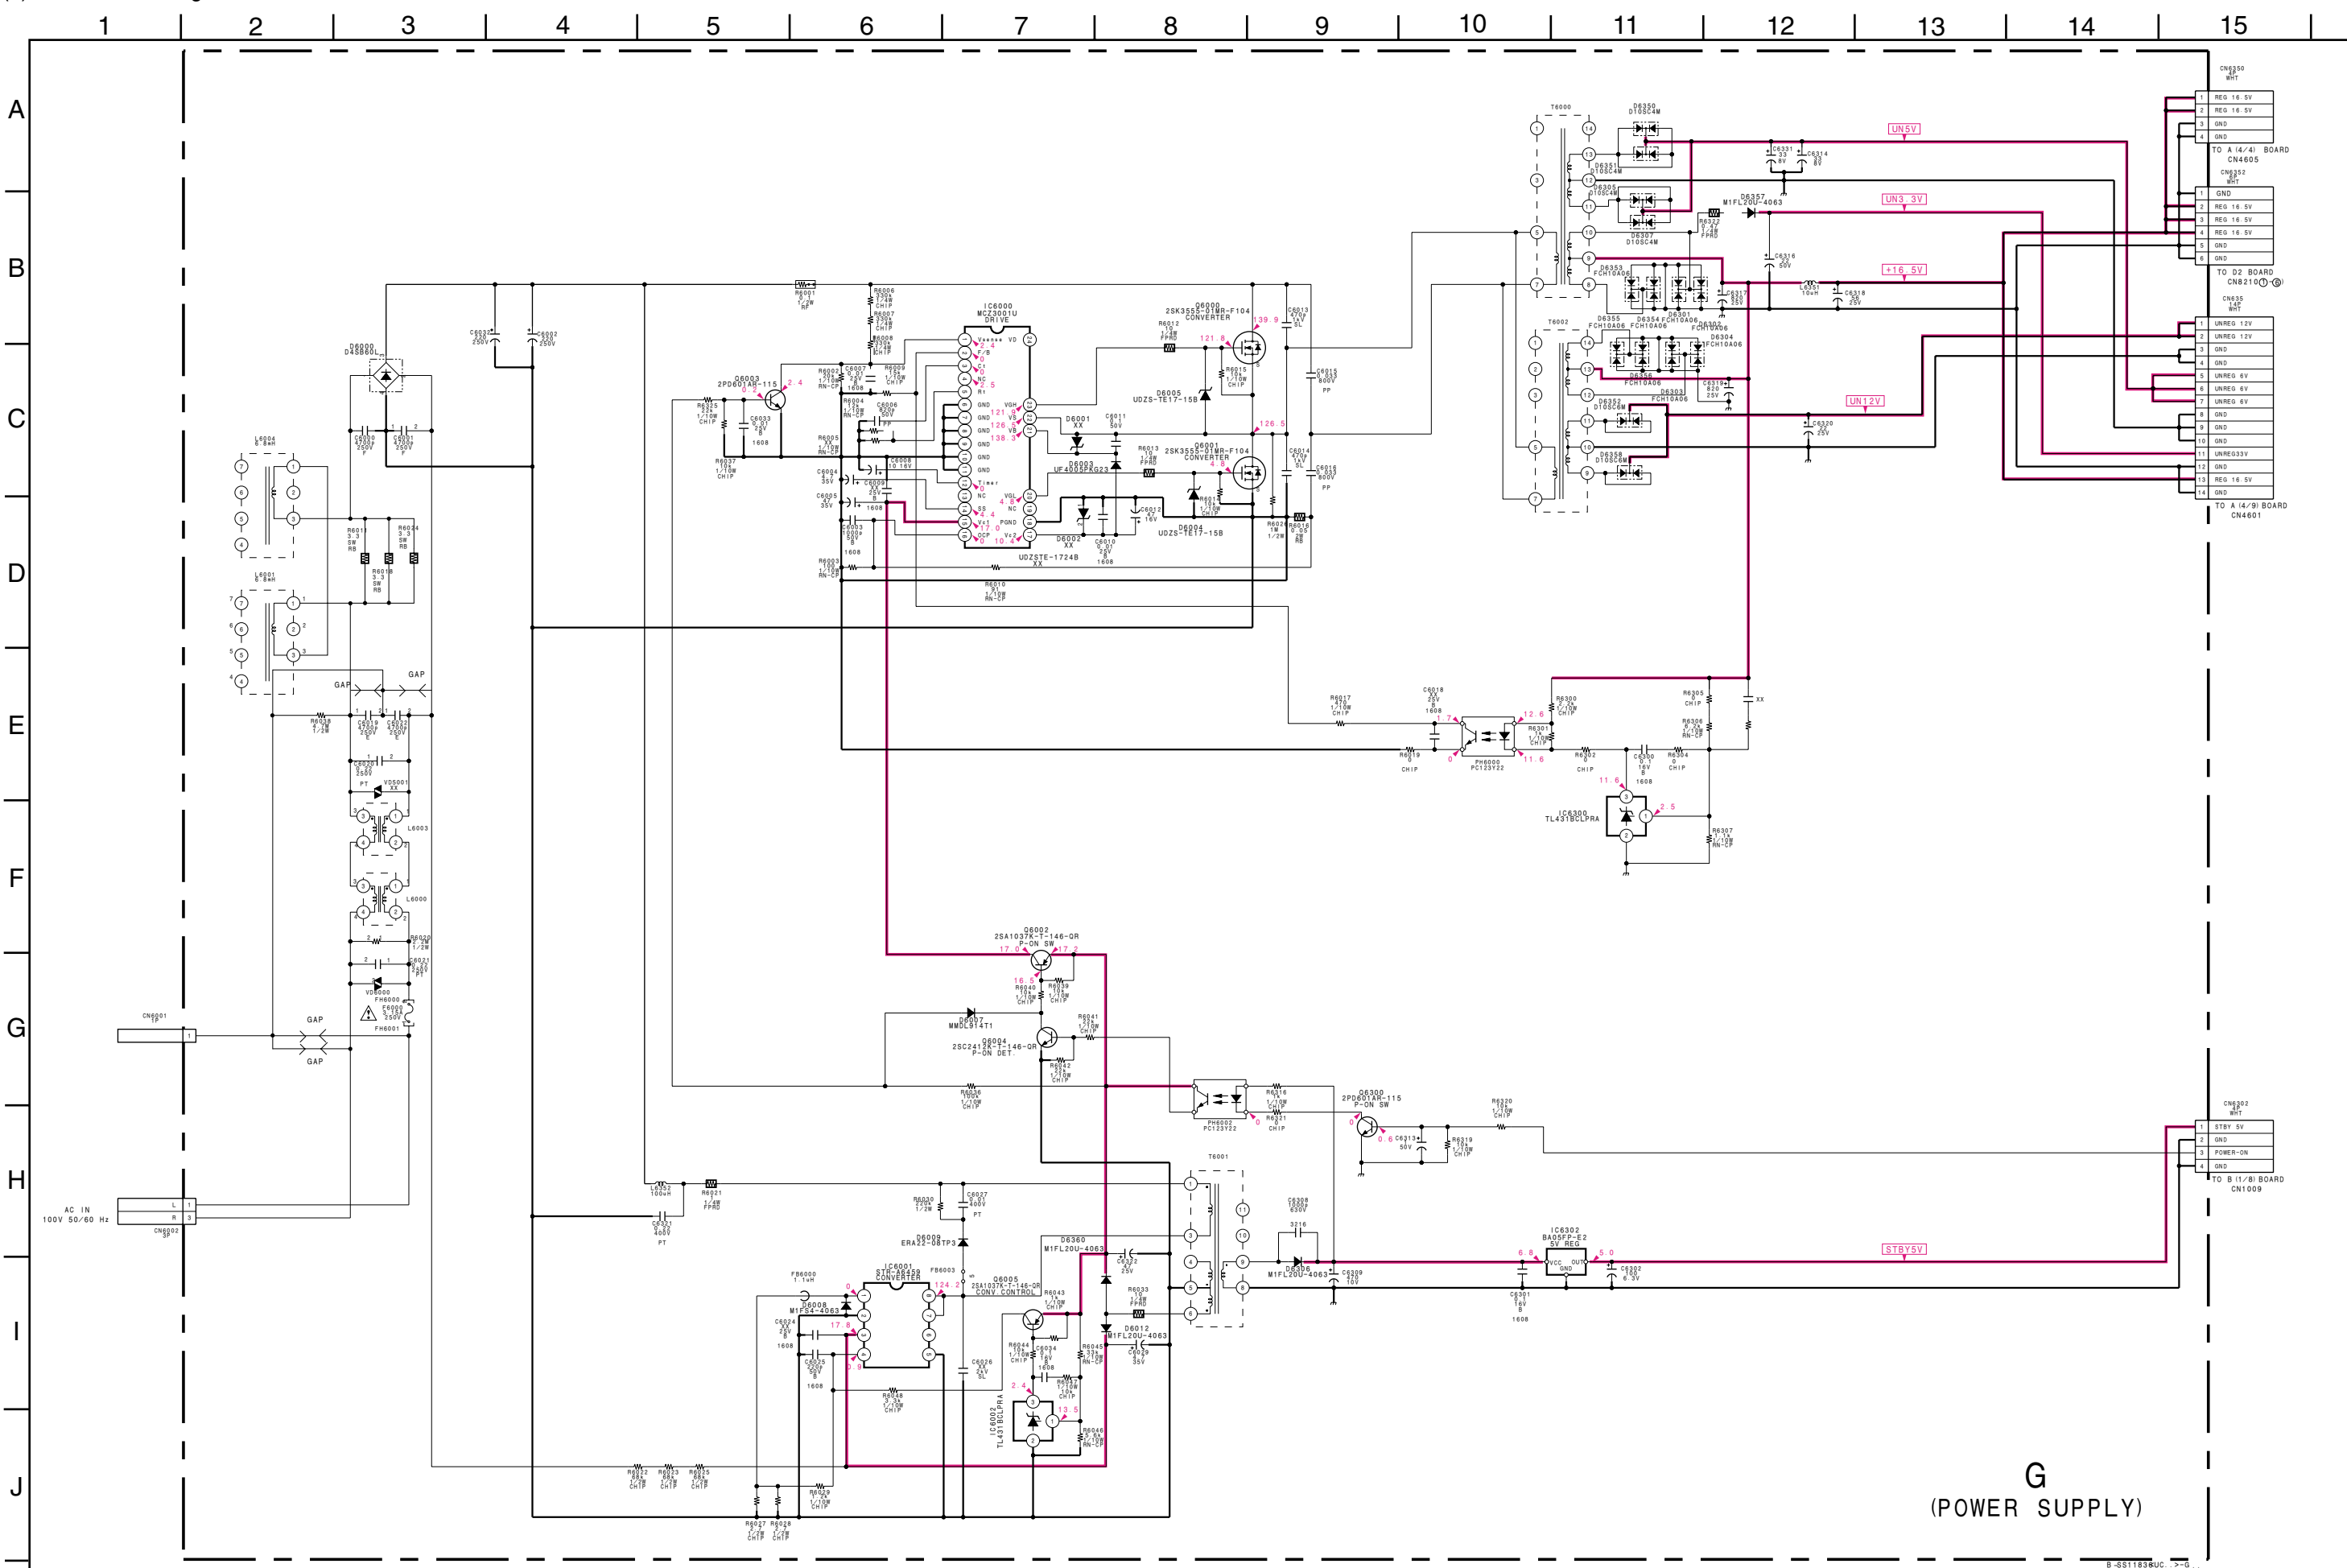


G
(POWER SUPPLY)

(5) Schematic Diagram of H1 and H2 Boards

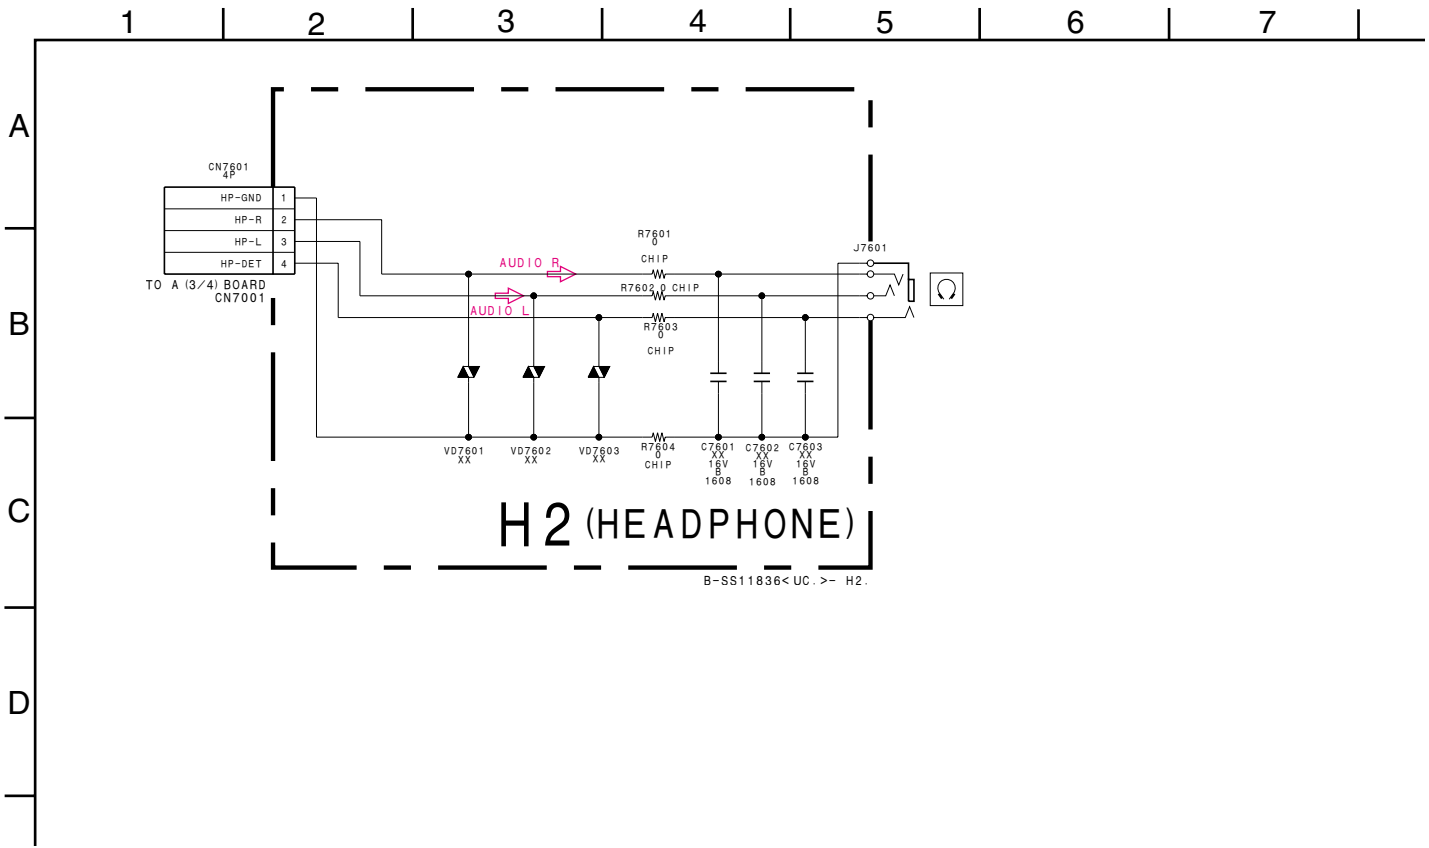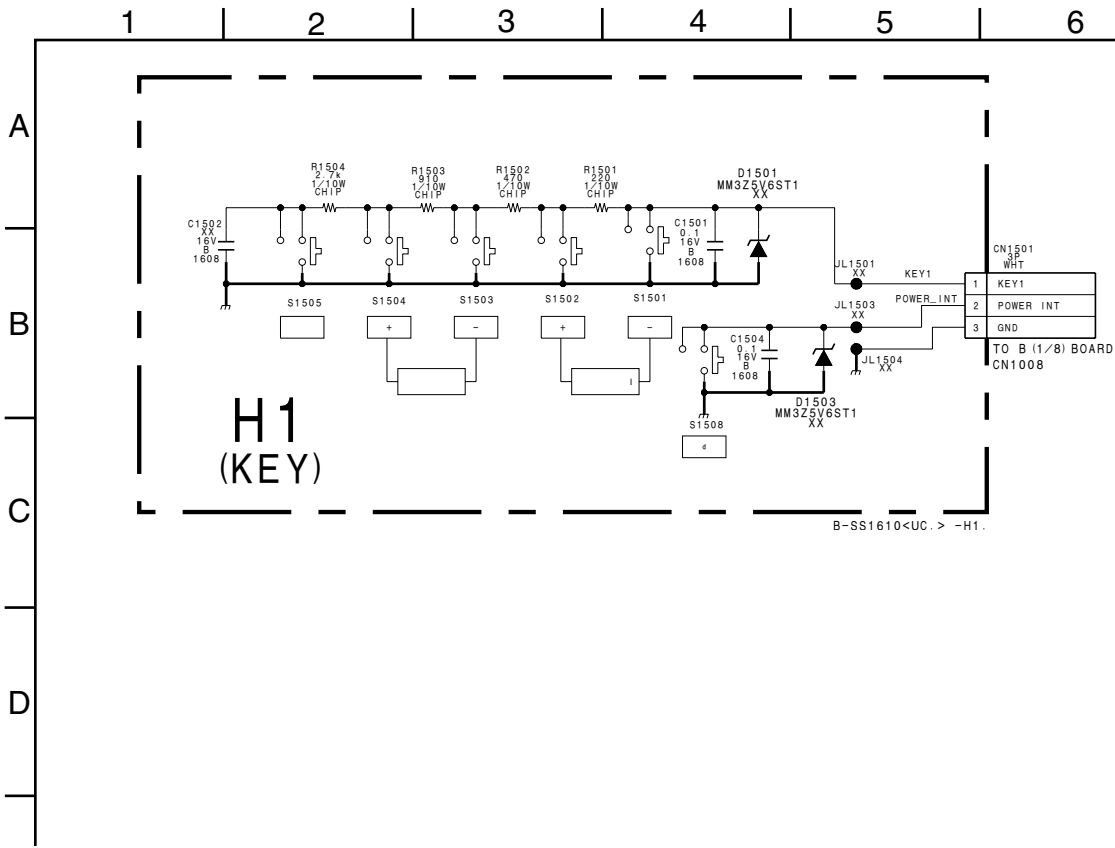


H1 [KEY]

— H1 BOARD —

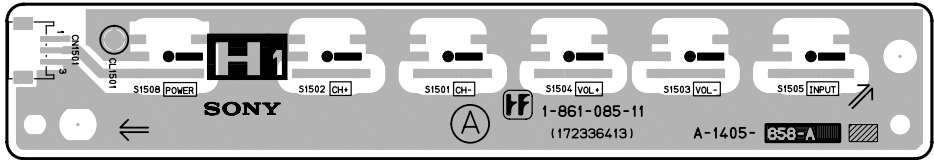


<COMPONENT SIDE>

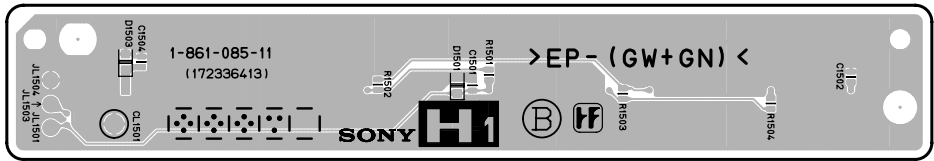


<CONDUCTOR SIDE>

H2 [HEADPHONE]

— H2 BOARD —





<COMPONENT SIDE>




<CONDUCTOR SIDE>

(6) Schematic Diagram of H3 and H4 Boards

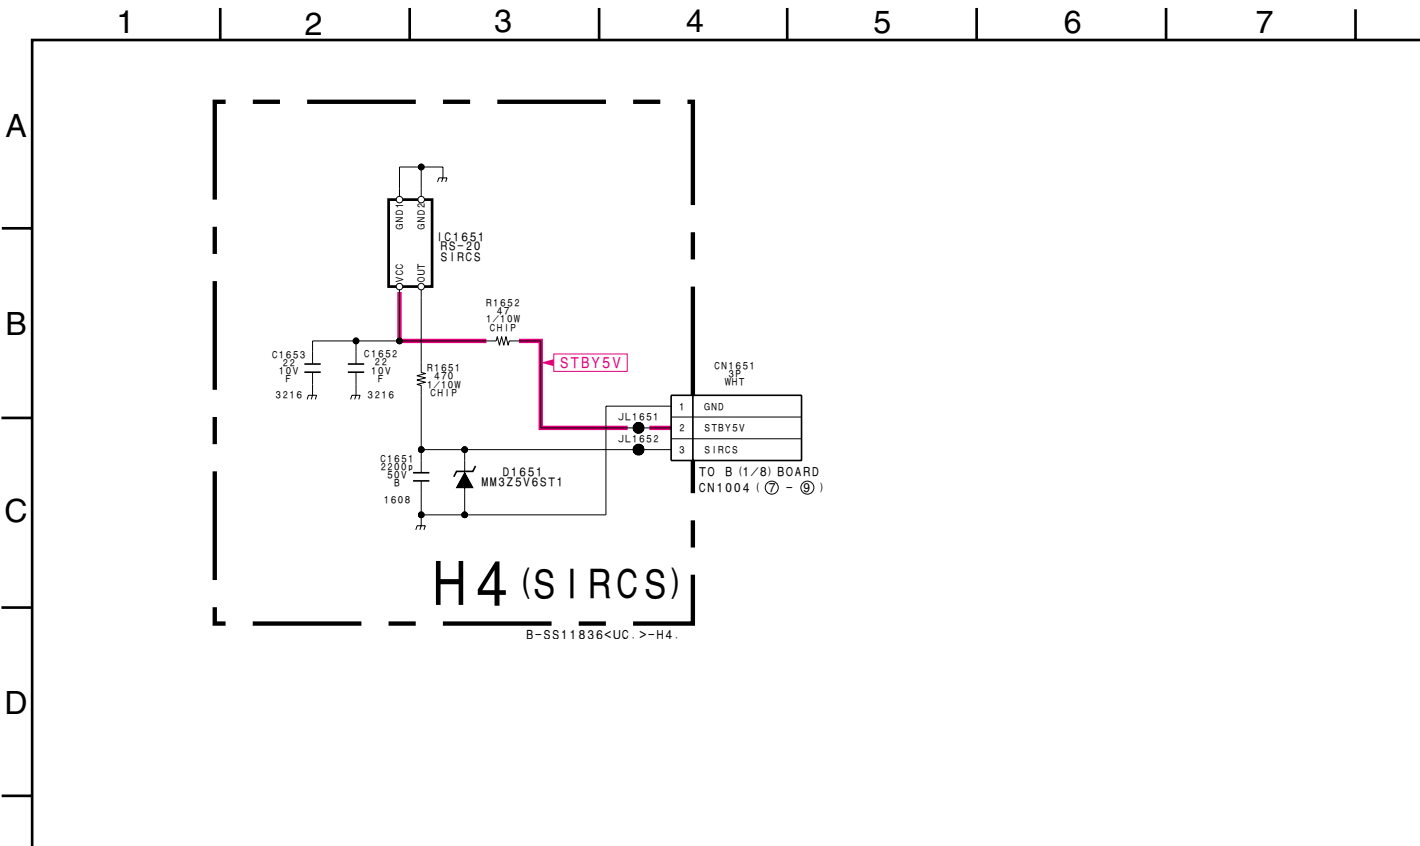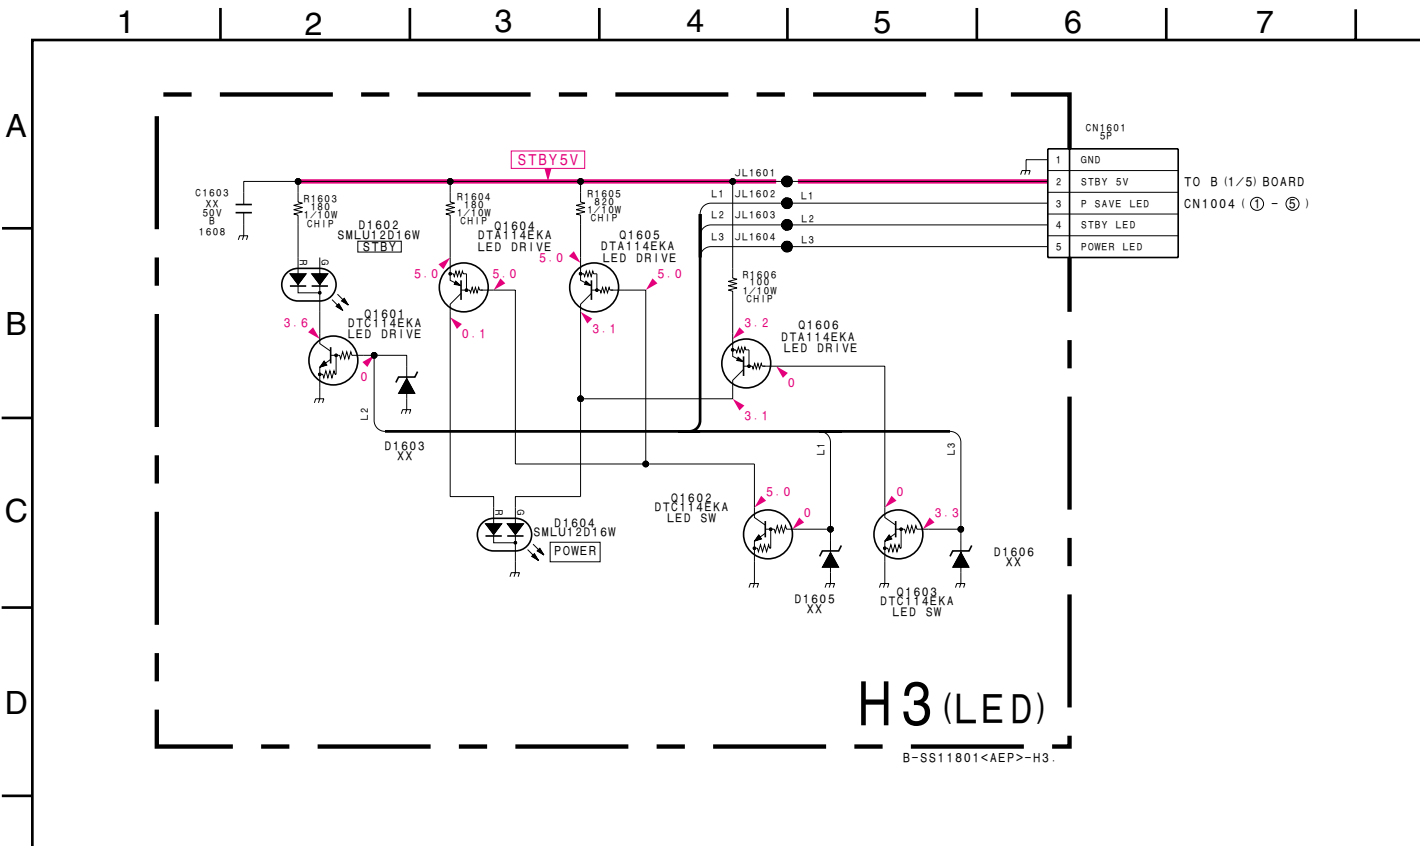


H3 [LED]

— H3 BOARD —

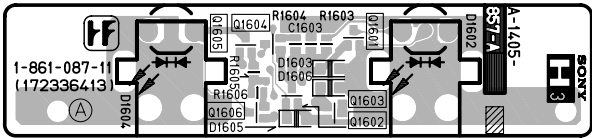


<COMPONENT SIDE>

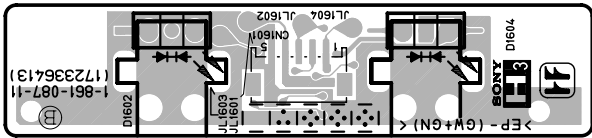


<CONDUCTOR SIDE>

H4 [SIRCS]

— H4 BOARD —




<COMPONENT SIDE>




<CONDUCTOR SIDE>

(7) Schematic Diagram of TU Board

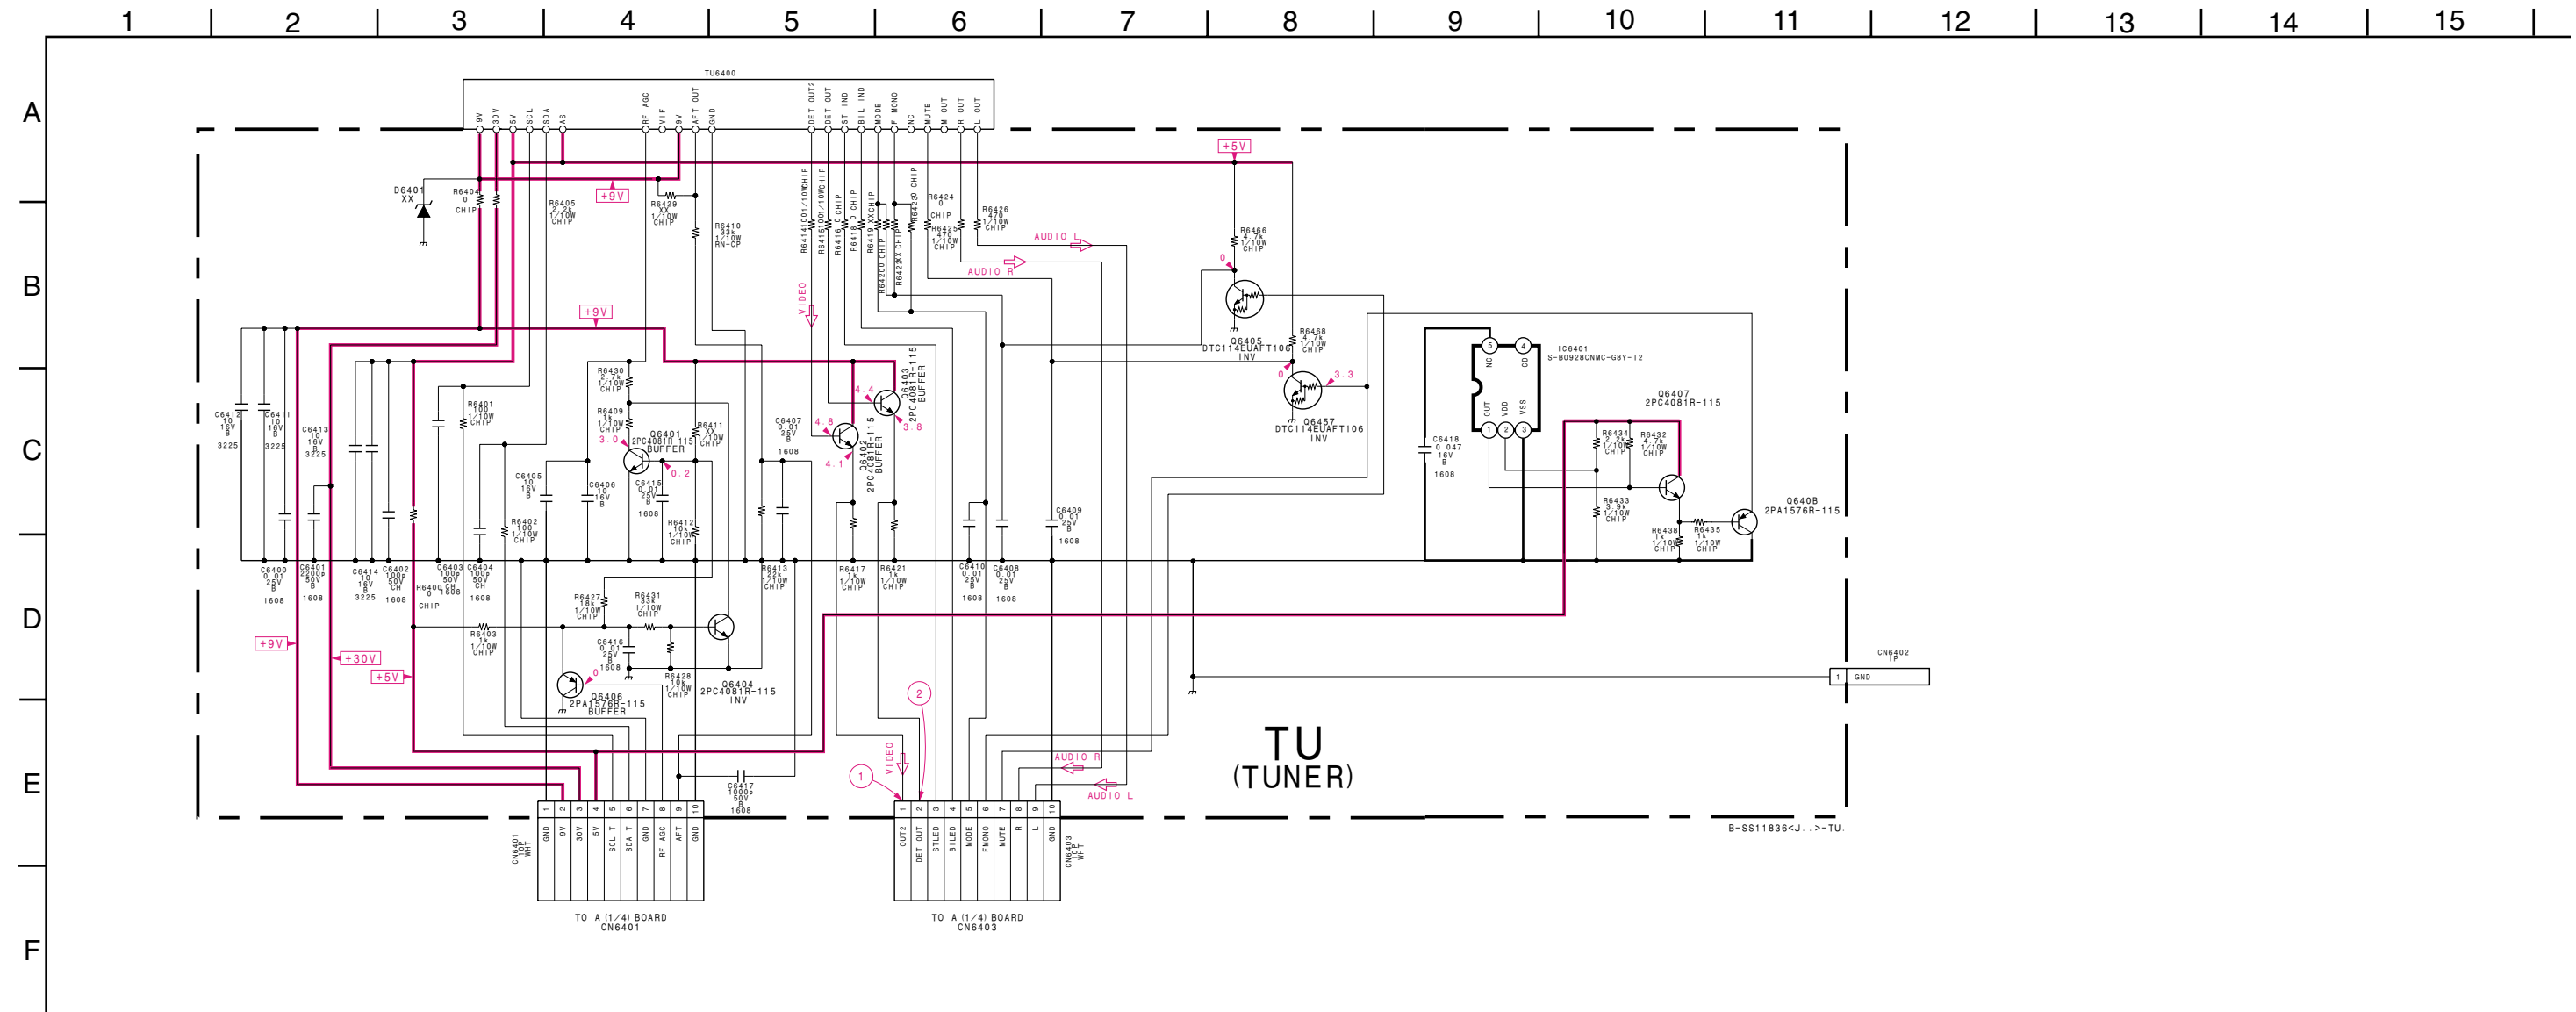


TU [TUNER]

— TU BOARD —

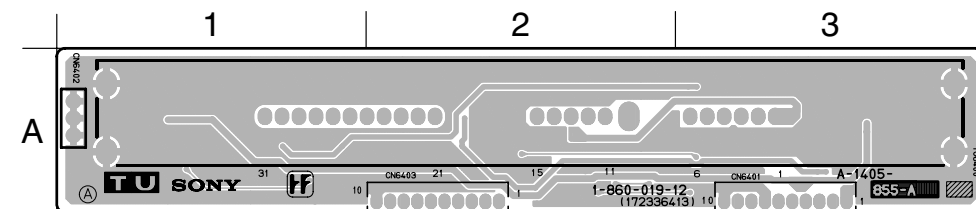


<COMPONENT SIDE>

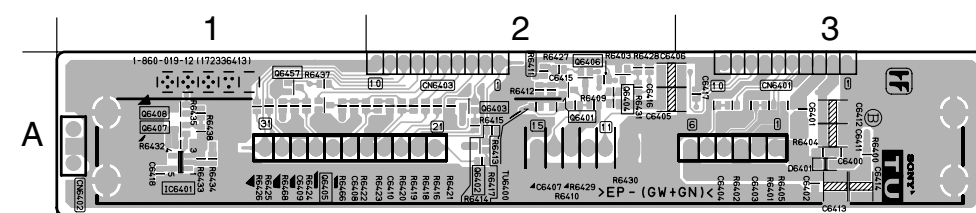



<CONDUCTOR SIDE>

(8) Schematic Diagram of U1 Board

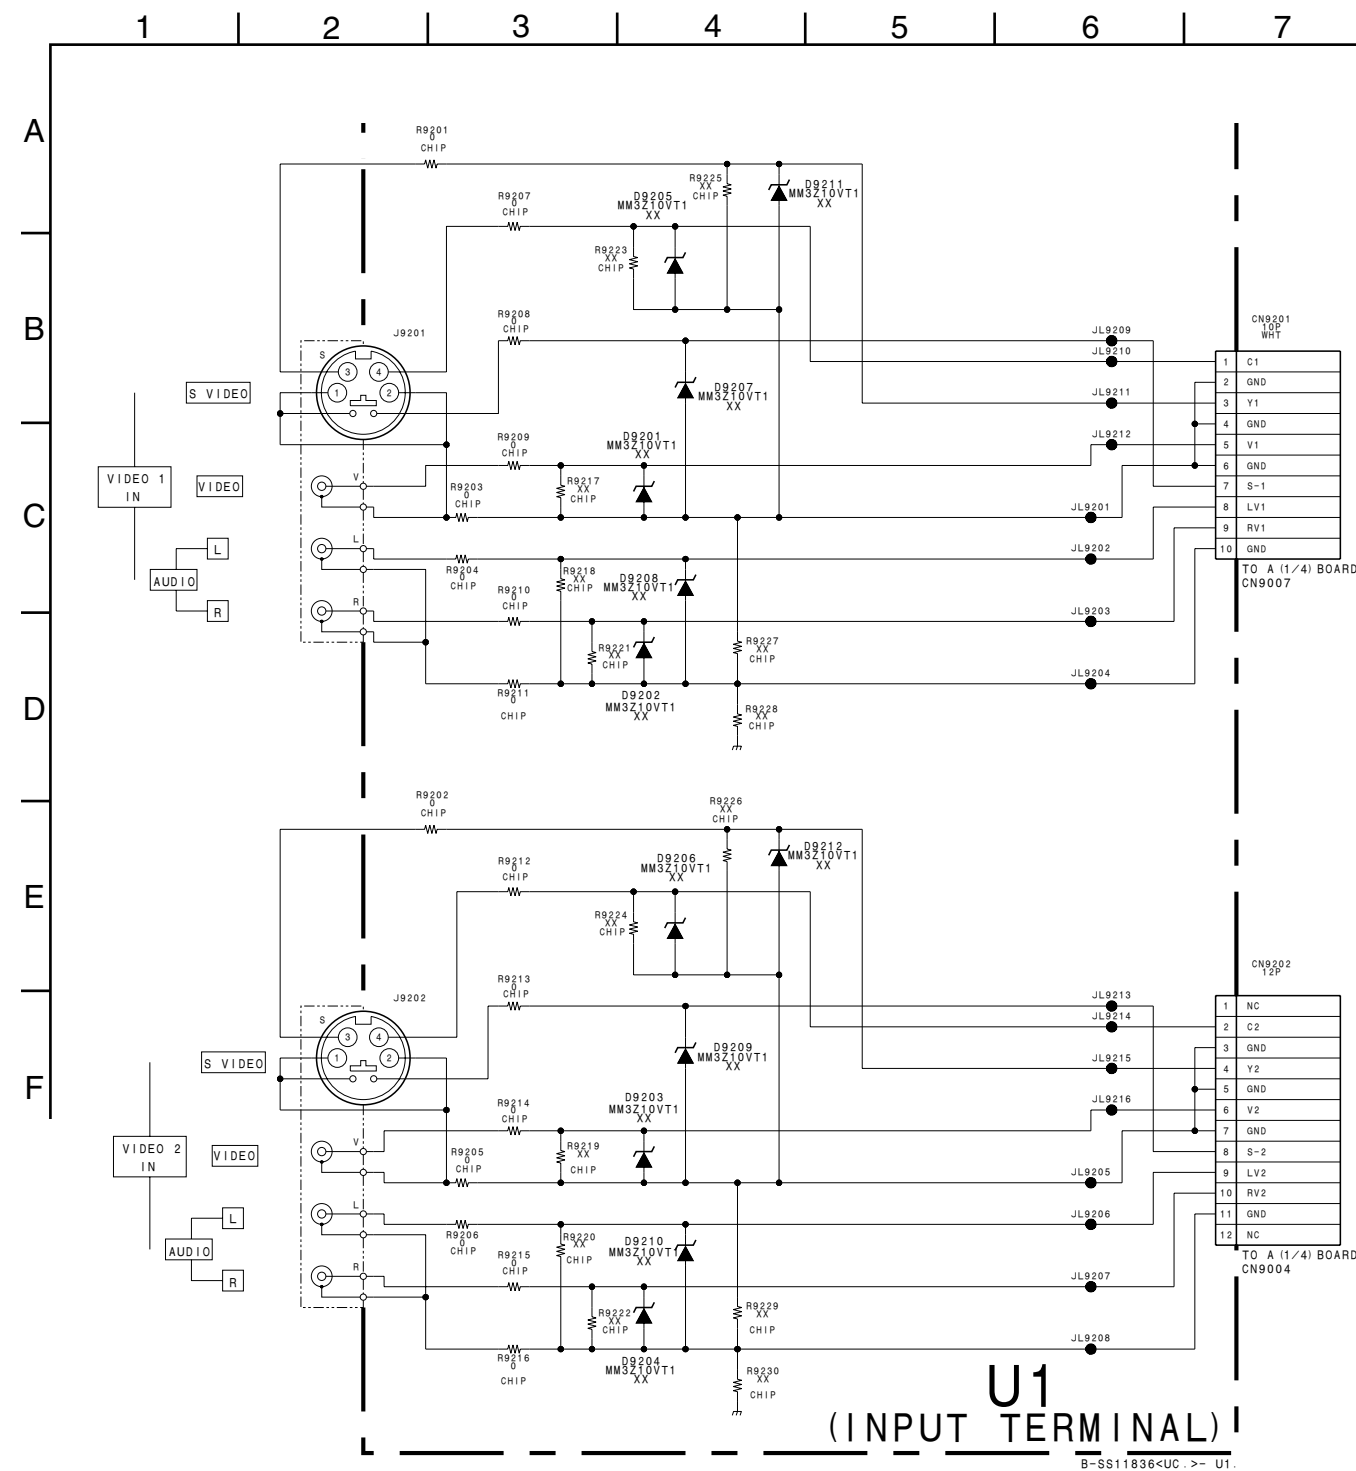

U1 [INPUT TERMINAL]


— U1 BOARD —

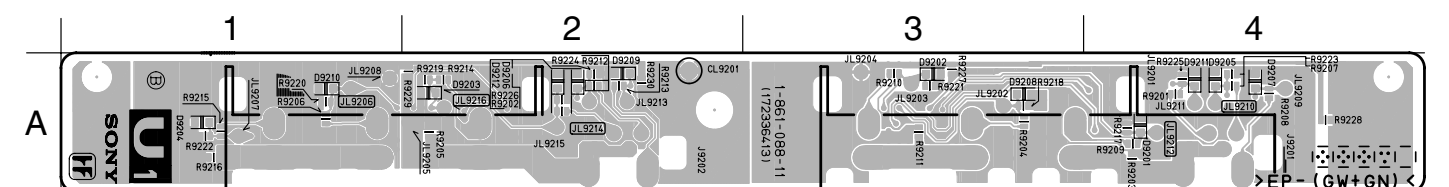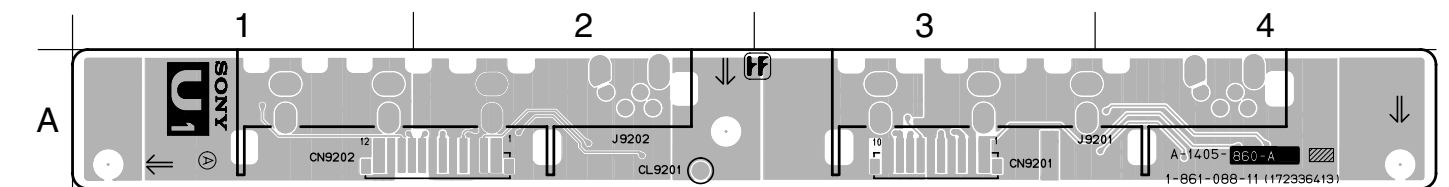

3-5. SEMICONDUCTORS


IC

AK4352VT-E2
CXD2085M-T4
CY27027ZCT
M52055FP
TC74VHC138FT(EL)
TC74VHC161FT(EL)




16Pin SOP

BA033FP-E2
BA05FP-E2
BA09FP-E2
S-80928CNMC-G8YT2G
TC7SZ125FU(TE85R)




5Pin CHIP

BA05T
BA09T




BA10358FV-E2
BA10393F-E2
BR24C02F-WE2
BR24C16F-E2
LM75CIMX-3
LMH6658MMX/J5000172
M24C02-WMN6T(A)
M24C64-WMN6T(B)
MM1096AFF
NJM2521V(TE2)
NJM3414AV(TE2)
NJM4558V-TE2
PACDN006S




8Pin SOP

BA18BC0FP-E2
BA25BC0FP-E2




BD3869AF-E2




18Pin DIP

BD9766FV-E2
OZ967SN-B-0-T2




28Pin SOP

CXA2089Q-T6
CXA2171AQ
NJM2700FJ1




48Pin QFP

CXD2097BQ
CXD9756R




208Pin QFP

CXD3802BQ




240Pin QFP

CXP964032-003R




GM7030-H
HD64F2377VFQ33V-AT2U1000




144Pin QFP


L88M05T-FA-TL



TL431BCLPRA




MBM29LV160BE-90TN-AT2UC-01
MX29LV800ATTC-70G-YSZ-1




48Pin SOP

MB93491




176Pin PGA

MB93401A




288Pin PGA

MCZ3001UB




24Pin SOP

MC74LVX00DTR2
SN74HCT02APWR
SN74LV132APWR
SN74LVC74APWR-12
TLC2933IPWR-12




14Pin SOP

MM1561JFBE




MSM56V16160F-10TS-K
MSM56V16160F-8T3FM1




50Pin SOP

MT48LC2M32B2TG-6-Y94W




86Pin SOP

MT48LC8M16A2TG-75-Y95W




54Pin SOP

PQ070XZ01ZP
PQ07VZ012ZP




1: Vin
2: Vc
3: Vo
4: adj
5: GND

PQ1CZ41H2ZPH




1: Vin
2: Vout
3: COM
4: Oadj
5: ON/OFF

RS-20




SN74ALVCH16823DGGR
THC63LVDM83R-T




56Pin SOP

STR-A6459




8Pin DIP

ST72631K4M1/NNLTR




34Pin SOP

S-80822CNNB-B8HT2G
S-80829CNNB-B8OT2G




TK11250CMCL



6Pin CHIP


TPS5120DBTR




30Pin SOP

TRANSISTOR


DTA114EUAFT106
DTA114YE-TL
DTA143EUA-T106
DTA144EE
DTA144EE-TL
DTC114EUA-T106
DTC144EE
DTC144EE-TL
DTC314TK-T-146
MSD601-RT1
MUN5213T1
2PA1576R-115
2PC4081R-115
2PD601AR-115
2SA1037AK-T146-QR
2SA1037AK-T146-R
2SA1226-E4
2SA1226-T1E3E4
2SB709A-QRS-TX
2SC1623-L5L6
2SC2412K-T-146-QR
2SC4178-F13F14-T1
2SC4178-F14
2SC4617R
2SC4617TL-QR
2SD601A-Q-TX




DTC114EU
DTC114EUAFT106




FDS4435A
FDS5690
FDS6690A
HAT2071R-EL
UPA1716G-E2




HN1B01FU-TE85R




IRF7901D1-TR




SI2301DS-T1
SI2304DS-T1
2SK1828
2SK1828TE85L
2SK3018-T106




SSM6N15FU(TE85R)




UMH2NL02TN




UMW1NTR



2SD2012




2SD2061-E




DIODE


DAN202K
DAN202K-T-146




DTZ10B
HZU16B2TRF
HZU4.7B3TRF
MA111-TX
MMDL914T1
PDZ10B-115
RD5.6SB-T1
UDZSTE-1710B
UDZSTE-1713B
UDZSTE-1715B
UDZSTE-1736B
UDZSTE-175.1B
UDZSTE-175.6B
UDZSTE-179.1B
1SS355TE-17




D10SC4M




D4SB60L




EC31QS03L-TE12L
M1FL20U-4063
RB160M-30TR




ERA22-08
ERA22-08TP3




FCH10A06




HN1D03FU-TE85L
HN1D03FU-TE85R




MA153-TX
1PS302
1SS226




M1FS4-4063




MM3Z10VT1
MM3Z13VT1
MM3Z2V4T1
MM3Z5V6ST1




PTZ-TE25-13A
PTZ-TE25-3.9B
PTZ-TE25-5.6B
RB063L-30TE25




UF4005PKG23




1PS184-115



1SS302
1SS302-TE85L



SMLU12D16W



SECTION 4

EXPLODED VIEWS


NOTE:









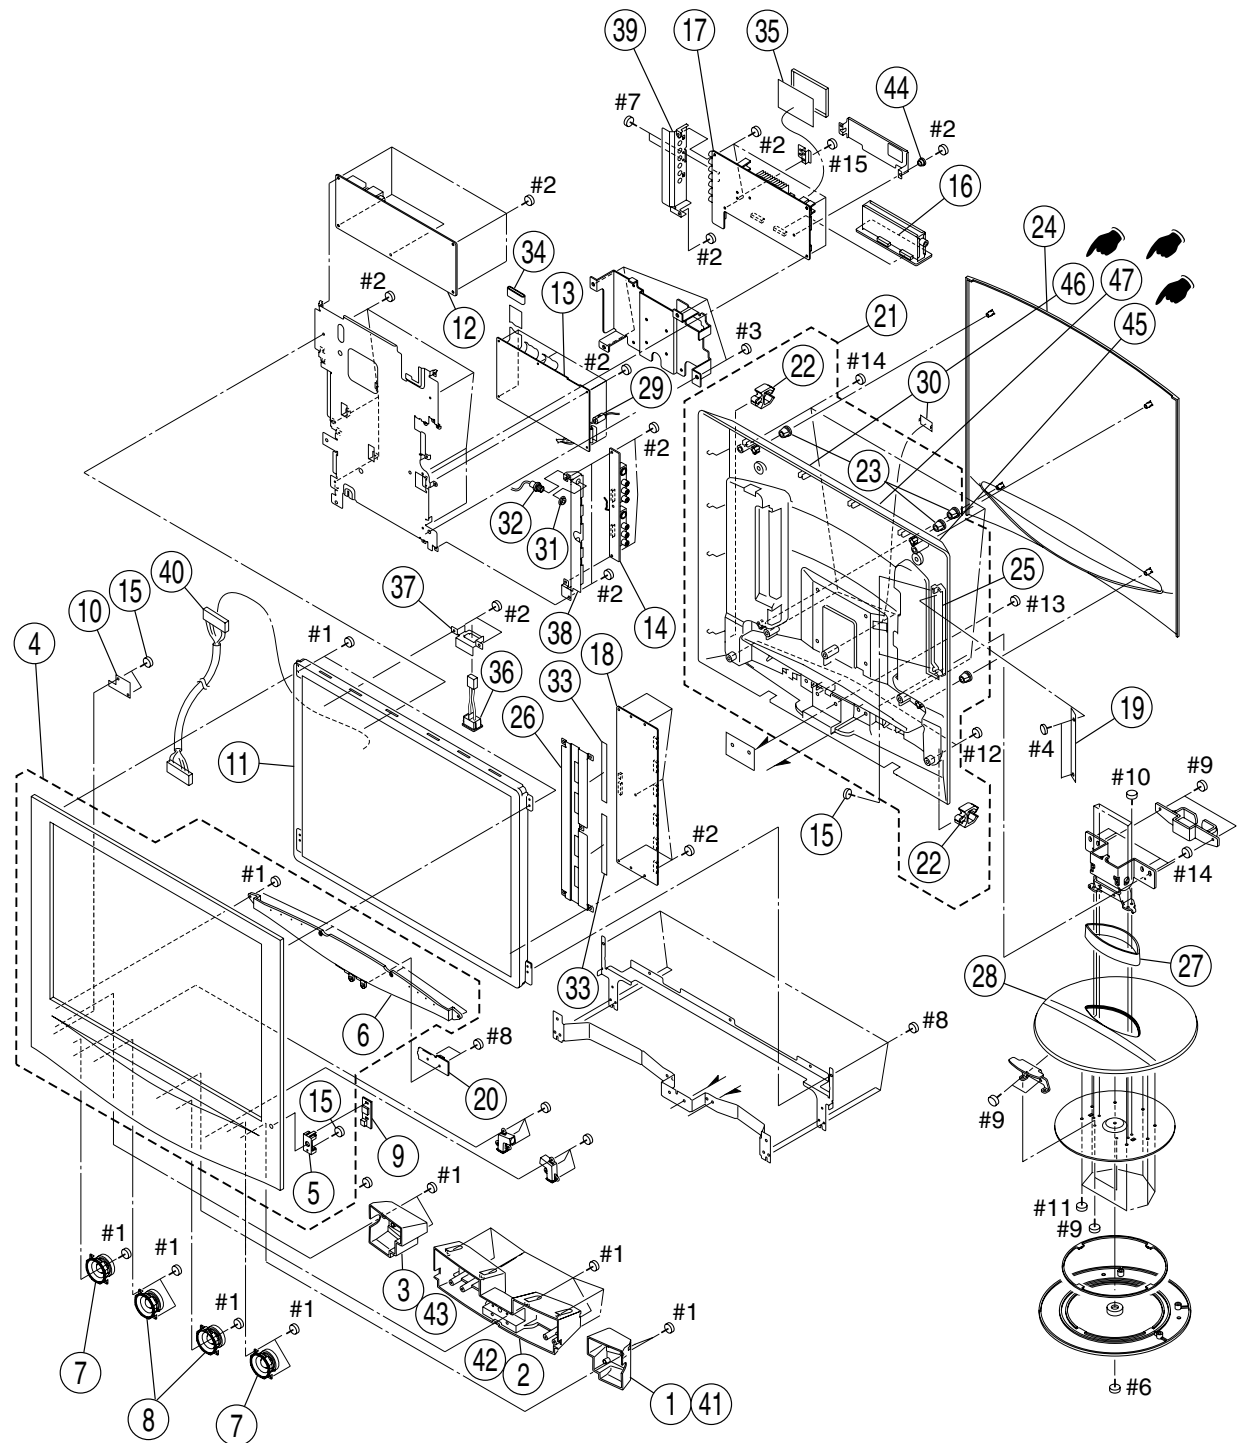

The components identified ⚠ marked are critical for safety.
Replace only with the part number specified.

Les composants identifiés par la marque ⚠ sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.


- Items with no part number and no description are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remark column.
- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

4-1. CHASSIS



| REF. No. | PART No. | DESCRIPTIONRE | MARK | REF. No. | PART No. | DESCRIPTIONRE | MARK |
|--|----------------|----------------------------------|----------|--|----------------|---|------|
| 1 | X-4041-578-1 | BOX,SPEAKERASSY(R) | 5, 6, 15 | 30 | 4-094-922-12 | COVER,ESC | |
| 2 | X-4041-579-3 | BOX,ASSY,WOOFER21 | | 31 | 3-682-691-21 | NUT,WASHER HEXAGON | |
| 3 | X-4041-577-1 | BOX,SPEAKER ASSY (L) | | 32 | 1-827-467-11 | CONNECTION CODE | |
| 4 | X-4042-411-1 | CABINET ASSY,FRONT | | 33 | * 4-095-186-01 | SEET D RADIATION | |
| 5 | * 4-095-254-01 | LIGHT GIDE | | 34 | 1-500-418-11 | CORE | |
| 6 | 4-095-256-22 | PANEL,CLEAR (21 INCH) | | 35 | * 4-095-199-01 | SEET A RADIATION | |
| 7 | 1-825-499-11 | LOUDSPEAKER (5 INCH) | | 36 | 1-818-024-11 | AC INRET ASSY | |
| 8 | 1-825-498-11 | LOUDSPEAKER (5 INCH) | | 37 | * X-4041-844-1 | BRACKET,TERMINAL C ASSY | |
| 9 | * A-1405-861-A | H4 MOUNT | | 38 | * X-4041-845-2 | BRACKET,TERMINAL A ASSY | |
|  9 | * A-1410-551-A | H4 MOUNT (Made in Mexico Model) | | 39 | * X-4042-409-1 | BRACKET,TERMINAL B ASSY | |
| 10 | * A-1405-859-A | H2 MOUNT | | 40 | 1-900-274-36 | LVDS CONNECTOR ASSY | |
|  10 | * A-1410-549-A | H2 MOUNT (Made in Mexico Model) | | 41 | * 4-095-258-01 | SPEAKER BOX (R) (21INCH) | |
| 11 | 1-805-323-31 | LCD PANEL | | 42 | * 4-095-259-02 | WOOFER BOX (21 INCH) | |
| 12 | * A-1405-854-A | G MOUNT | | 43 | * 4-095-257-01 | SPEAKER BOX (L) (21INCH) | |
| 13 | * A-1405-853-A | B MOUNT | | 44 | 2-371-561-00 | BUSHING (P), INSULATING | |
| 14 | * A-1405-860-A | U1 MOUNT | |  45 | 4-100-401-02 | LABEL, INFORMATION (L) (Made in Mexico Model) | |
|  14 | * A-1410-550-A | U1 MOUNT (Made in Mexico Model) | |  46 | 4-100-402-02 | LABEL, INFORMATION (R) (Made in Mexico Model) | |
| 15 | 3-318-203-72 | SCREW+B1.7X5 TAPPING | |  47 | 4-100-403-02 | LABEL, INFORMATION (S) (Made in Mexico Model) | |
| 16 | * A-1405-855-A | TU COMPLE | | #1 | 7-685-647-79 | SCREW+BVTP 3X10,TYPE 2,IT-3 | |
|  16 | * A-1410-545-A | TU COMPLE (Made in Mexico Model) | | #2 | 7-685-871-01 | SCREW+BVTT 3X6 | |
| 17 | * A-1405-856-A | A MOUNT | | #3 | 7-682-161-09 | SCREW+P4X8 | |
|  17 | * A-1410-546-A | A MOUNT (Made in Mexico Model) | | #4 | 7-685-645-79 | SCREW+BVTP 3X6, TYPE 2,IT-3 | |
| 18 | * A-1405-097-A | D2 MOUNT | | #5 | 7-685-649-79 | SCREW+BVTP 3X14,TYPE 2,IT-3 | |
| 19 | * A-1405-858-A | H1 MOUNT | | #6 | 7-682-663-09 | SCREW+PSW 4X12? PS 4X12? | |
|  19 | * A-1410-548-A | H1 MOUNT (Made in Mexico Model) | | #7 | 7-685-646-79 | SCREW+BVTP 3X8,TYPE 2,IT-3 | |
| 20 | * A-1405-857-A | H3 MOUNT | | #8 | 7-685-648-79 | SCREW+BVTP 3X12,TYPE 2,IT-3 | |
|  20 | * A-1410-547-A | H3 MOUNT (Made in Mexico Model) | | #9 | 7-682-546-09 | SCREW+B 3X5 | |
| 21 | X-4042-408-1 | CABINET ASSY,REAR 21 | 22, 23 | #10 | 7-682-948-01 | SCREW+PSW 3X8 | |
| 22 | 4-098-971-01 | SIDE CLAMP | | #11 | 7-685-246-19 | SCREW+KTP 3X8,TYPE 2,NON-SLIT | |
| 23 | 4-095-322-01 | BUSHING,RUBBER | | #12 | 7-685-649-79 | SCREW+BVTP 3X14,TYPE 2,IT-3 | |
| 24 | X-4042-539-1 | COVER,21 ASSY,REAR | | #13 | 7-685-651-79 | SCREW+BVTP 3X20,TYPE 2,IT-3 | |
| 25 | 4-095-264-21 | COVER,MULTIBOTTON | | #14 | 7-682-964-01 | SCREW+PSW 4X14 | |
| 26 | * 4-095-194-02 | HEAT SINK D | | | | | |
| 27 | 4-095-172-21 | COVER,STAND,TOP | | | | | |
| 28 | 4-095-169-21 | COVER,STAND | | | | | |
| 29 | 1-500-459-11 | FILTER, CLAMP (FERITE CORE) | | | | | |

4-2. PACKING MATERIALS

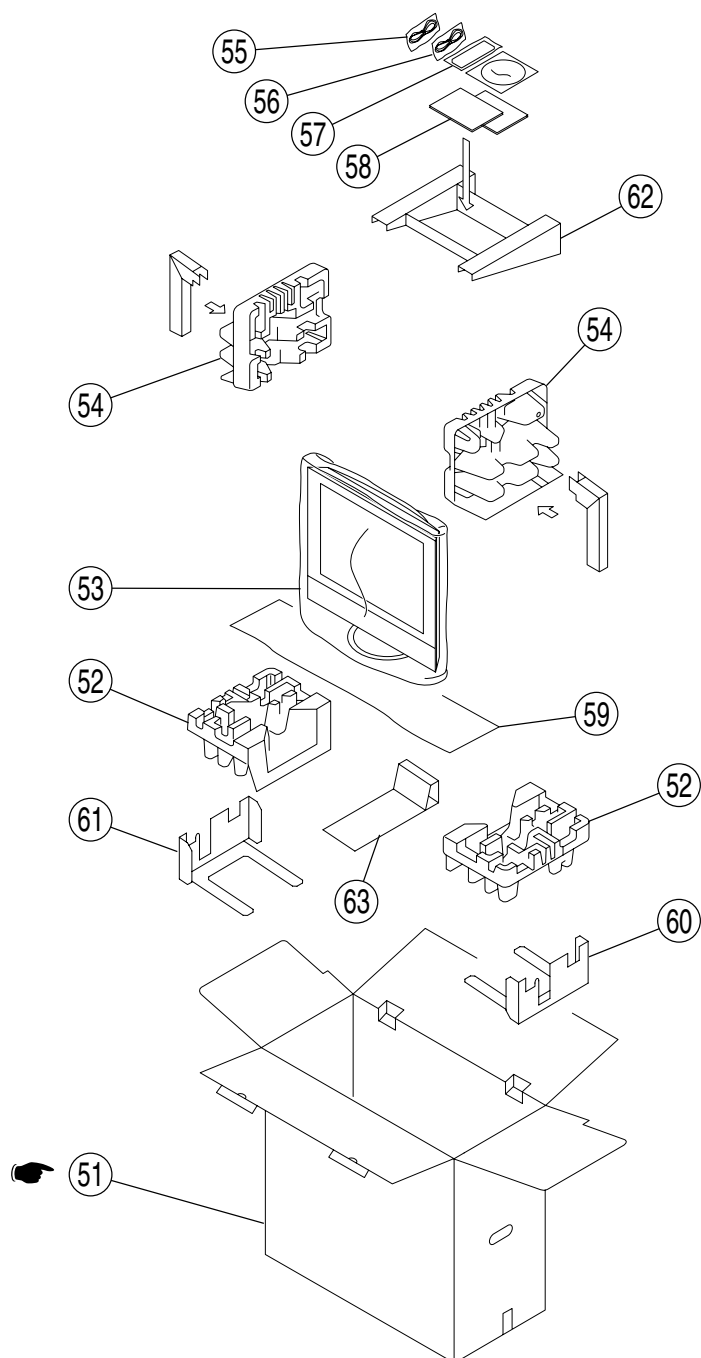

| REF. No. | PART No. | DESCRIPTIONRE | MARK | REF. No. | PART No. | DESCRIPTIONRE | MARK |
|----------|----------------|--|------|----------|----------------|----------------------------|------|
| 51 | * 4-099-787-01 | CARTON,INDIVIDUAL (Made in Japan Model) | | 58 | 4-099-415-11 | MANUAL INSTRUCTION | |
| 51 | * 4-100-395-01 | CARTON,INDIVIDUAL (Made in Mexico Model) | | | 4-099-415-21 | MANUAL INSTRUCTION | |
| 52 | * 4-095-203-01 | CUSHION,LOWER 21 | | | 4-099-415-31 | MANUAL INSTRUCTION | |
| 53 | * 4-101-087-01 | BAG,PROTECTION | | 59 | * 4-101-088-01 | SHEET, PROTECTION | |
| 54 | * 4-095-200-01 | CUSHION,UPPER 21 | | 60 | * 4-100-963-01 | REINFORCEMENT PAD(LOWER R) | |
| 55 | 1-757-319-42 | CABLE, COAXIAL (WITH (F) PLUG) | | | | | |
| 56 | 1-827-804-11 | POWER-SUPPLY CORD | | 61 | * 4-100-962-01 | REINFORCEMENT PAD(LOWER L) | |
| 57 | 1-478-381-11 | STANDARD TYPE COMMANDER (RM-Y1104) | | 62 | * 4-096-131-01 | ACCESSORIES BOX | |
| | | | | 63 | * 4-100-961-01 | STAND SUPPORT | |

SECTION 5

ELECTRICAL PARTS LIST

NOTE:

The components identified \triangle marked are critical for safety.
Replace only with the part number specified.

Les composants identifiés par la marque \triangle sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

When indicating parts by reference number, please include the board name.

- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

RESISTORS

- All resistors are in ohms
- F : nonflammable

| No. | # | Board | Type | Δ/μ | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|-----------|--------------|----------|--------------|----------------------------------|-----------|-----------|
| 1 | | D2 | CAPACITOR | | C8201 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 2 | | D2 | CAPACITOR | | C8202 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 3 | | D2 | CAPACITOR | | C8203 | 1-100-628-91 | CERAMIC CHIP 22PF 5% 4KV | | |
| 4 | | D2 | CAPACITOR | | C8204 | 1-164-677-11 | CERAMIC CHIP 0.033UF 10.00% 16V | | |
| 5 | | D2 | CAPACITOR | | C8205 | 1-100-628-91 | CERAMIC CHIP 22PF 5% 4KV | | |
| 6 | | D2 | CAPACITOR | | C8206 | 1-164-677-11 | CERAMIC CHIP 0.033UF 10.00% 16V | | |
| 7 | | D2 | CAPACITOR | | C8207 | 1-100-628-91 | CERAMIC CHIP 22PF 5% 4KV | | |
| 8 | | D2 | CAPACITOR | | C8208 | 1-164-677-11 | CERAMIC CHIP 0.033UF 10.00% 16V | | |
| 9 | | D2 | CAPACITOR | | C8209 | 1-100-628-91 | CERAMIC CHIP 22PF 5% 4KV | | |
| 10 | | D2 | CAPACITOR | | C8210 | 1-164-677-11 | CERAMIC CHIP 0.033UF 10.00% 16V | | |
| 11 | | D2 | CAPACITOR | | C8211 | 1-100-628-91 | CERAMIC CHIP 22PF 5% 4KV | | |
| 12 | | D2 | CAPACITOR | | C8212 | 1-164-677-11 | CERAMIC CHIP 0.033UF 10.00% 16V | | |
| 13 | | D2 | CAPACITOR | | C8213 | 1-100-628-91 | CERAMIC CHIP 22PF 5% 4KV | | |
| 14 | | D2 | CAPACITOR | | C8214 | 1-164-677-11 | CERAMIC CHIP 0.033UF 10.00% 16V | | |
| 15 | | D2 | CAPACITOR | | C8215 | 1-127-738-91 | CERAMIC CHIP 4.7UF 10% 25V | | |
| 16 | | D2 | CAPACITOR | | C8216 | 1-127-738-91 | CERAMIC CHIP 4.7UF 10% 25V | | |
| 17 | | D2 | CAPACITOR | | C8219 | 1-135-960-91 | CERAMIC CHIP 10UF 10% 25V | | |
| 18 | | D2 | CAPACITOR | | C8220 | 1-135-960-91 | CERAMIC CHIP 10UF 10% 25V | | |
| 19 | | D2 | CAPACITOR | | C8221 | 1-135-960-91 | CERAMIC CHIP 10UF 10% 25V | | |
| 20 | | D2 | CAPACITOR | | C8222 | 1-135-960-91 | CERAMIC CHIP 10UF 10% 25V | | |
| 21 | | D2 | CAPACITOR | | C8223 | 1-135-960-91 | CERAMIC CHIP 10UF 10% 25V | | |
| 22 | | D2 | CAPACITOR | | C8224 | 1-135-960-91 | CERAMIC CHIP 10UF 10% 25V | | |
| 23 | | D2 | CAPACITOR | | C8225 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | | |
| 24 | | D2 | CAPACITOR | | C8226 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 25 | | D2 | CAPACITOR | | C8227 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | | |
| 26 | | D2 | CAPACITOR | | C8228 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 27 | | D2 | CAPACITOR | | C8229 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | | |
| 28 | | D2 | CAPACITOR | | C8230 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 29 | | D2 | CAPACITOR | | C8231 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | | |
| 30 | | D2 | CAPACITOR | | C8232 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 31 | | D2 | CAPACITOR | | C8233 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | | |
| 32 | | D2 | CAPACITOR | | C8234 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | | |
| 33 | | D2 | CAPACITOR | | C8235 | 1-165-176-11 | CERAMIC CHIP 0.047UF 10.00% 16V | | |
| 34 | | D2 | CAPACITOR | | C8236 | 1-165-176-11 | CERAMIC CHIP 0.047UF 10.00% 16V | | |
| 35 | | D2 | CAPACITOR | | C8237 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | | |
| 36 | | D2 | CAPACITOR | | C8238 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | | |
| 37 | | D2 | CAPACITOR | | C8239 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 38 | | D2 | CAPACITOR | | C8240 | 1-165-176-11 | CERAMIC CHIP 0.047UF 10.00% 16V | | |
| 39 | | D2 | CAPACITOR | | C8241 | 1-165-176-11 | CERAMIC CHIP 0.047UF 10.00% 16V | | |
| 40 | | D2 | CAPACITOR | | C8242 | 1-165-176-11 | CERAMIC CHIP 0.047UF 10.00% 16V | | |
| 41 | | D2 | CAPACITOR | | C8243 | 1-165-176-11 | CERAMIC CHIP 0.047UF 10.00% 16V | | |
| 42 | | D2 | CAPACITOR | | C8244 | 1-165-875-11 | CERAMIC CHIP 10UF 10% 10V | | |
| 43 | | D2 | CAPACITOR | | C8245 | 1-165-875-11 | CERAMIC CHIP 10UF 10% 10V | | |
| 44 | | D2 | CAPACITOR | | C8246 | 1-107-823-11 | CERAMIC CHIP 0.47UF 10.00% 16V | | |
| 45 | | D2 | CAPACITOR | | C8247 | 1-107-823-11 | CERAMIC CHIP 0.47UF 10.00% 16V | | |
| 46 | | D2 | CAPACITOR | | C8248 | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V | | |
| 47 | | D2 | CAPACITOR | | C8249 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 48 | | D2 | CAPACITOR | | C8250 | 1-107-823-11 | CERAMIC CHIP 0.47UF 10.00% 16V | | |
| 49 | | D2 | CAPACITOR | | C8251 | 1-107-823-11 | CERAMIC CHIP 0.47UF 10.00% 16V | | |
| 50 | | D2 | CAPACITOR | | C8252 | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V | | |
| 51 | | D2 | CAPACITOR | | C8253 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 52 | | D2 | CAPACITOR | | C8254 | 1-135-960-91 | CERAMIC CHIP 10UF 10% 25V | | |
| 53 | | D2 | CAPACITOR | | C8255 | 1-135-960-91 | CERAMIC CHIP 10UF 10% 25V | | |
| 54 | | D2 | CAPACITOR | | C8256 | 1-135-960-91 | CERAMIC CHIP 10UF 10% 25V | | |
| 55 | | D2 | CAPACITOR | | C8257 | 1-135-960-91 | CERAMIC CHIP 10UF 10% 25V | | |
| 56 | | D2 | CAPACITOR | | C8258 | 1-135-960-91 | CERAMIC CHIP 10UF 10% 25V | | |
| 57 | | D2 | CAPACITOR | | C8259 | 1-135-960-91 | CERAMIC CHIP 10UF 10% 25V | | |
| 58 | | D2 | CAPACITOR | | C8260 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 59 | | D2 | CAPACITOR | | C8261 | 1-107-823-11 | CERAMIC CHIP 0.47UF 10.00% 16V | | |
| 60 | | D2 | CAPACITOR | | C8262 | 1-127-738-91 | CERAMIC CHIP 4.7UF 10% 25V | | |
| 61 | | D2 | CAPACITOR | | C8263 | 1-127-738-91 | CERAMIC CHIP 4.7UF 10% 25V | | |
| 62 | | D2 | CAPACITOR | | C8264 | 1-100-628-91 | CERAMIC CHIP 22PF 5% 4KV | | |
| 63 | | D2 | CAPACITOR | | C8265 | 1-164-677-11 | CERAMIC CHIP 0.033UF 10.00% 16V | | |
| 64 | | D2 | CAPACITOR | | C8266 | 1-100-628-91 | CERAMIC CHIP 22PF 5% 4KV | | |
| 65 | | D2 | CAPACITOR | | C8267 | 1-164-677-11 | CERAMIC CHIP 0.033UF 10.00% 16V | | |
| 66 | | D2 | CAPACITOR | | C8268 | 1-100-628-91 | CERAMIC CHIP 22PF 5% 4KV | | |
| 67 | | D2 | CAPACITOR | | C8269 | 1-164-677-11 | CERAMIC CHIP 0.033UF 10.00% 16V | | |
| 68 | | D2 | CAPACITOR | | C8270 | 1-100-628-91 | CERAMIC CHIP 22PF 5% 4KV | | |
| 69 | | D2 | CAPACITOR | | C8271 | 1-164-677-11 | CERAMIC CHIP 0.033UF 10.00% 16V | | |
| 70 | | D2 | CAPACITOR | | C8272 | 1-100-628-91 | CERAMIC CHIP 22PF 5% 4KV | | |
| 71 | | D2 | CAPACITOR | | C8273 | 1-164-677-11 | CERAMIC CHIP 0.033UF 10.00% 16V | | |
| 72 | | D2 | CAPACITOR | | C8274 | 1-100-628-91 | CERAMIC CHIP 22PF 5% 4KV | | |
| 73 | | D2 | CAPACITOR | | C8275 | 1-164-677-11 | CERAMIC CHIP 0.033UF 10.00% 16V | | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|------------|-----|----------|--------------|-------------------------------|-----------|-----------|
| 74 | | D2 | CAPACITOR | | C8276 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 75 | | D2 | CAPACITOR | | C8277 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 76 | | D2 | CAPACITOR | | C8278 | 1-162-959-11 | CERAMIC CHIP 330PF 5.00% 50V | | |
| 77 | | D2 | CAPACITOR | | C8279 | 1-164-230-11 | CERAMIC CHIP 220PF 5.00% 50V | | |
| 78 | | D2 | CAPACITOR | | C8280 | 1-164-230-11 | CERAMIC CHIP 220PF 5.00% 50V | | |
| 79 | | D2 | CAPACITOR | | C8281 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 80 | | D2 | CAPACITOR | | C8282 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 81 | | D2 | CAPACITOR | | C8283 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 82 | | D2 | CAPACITOR | | C8284 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 83 | | D2 | CONNECTOR | * | CN8201 | 1-764-643-21 | PIN, CONNECTOR (SMD) 11P | | |
| 84 | | D2 | CONNECTOR | | CN8202 | 1-817-609-21 | PIN, CONNECTOR (PC BOARD) 3P | | |
| 85 | | D2 | CONNECTOR | | CN8203 | 1-817-609-21 | PIN, CONNECTOR (PC BOARD) 3P | | |
| 86 | | D2 | CONNECTOR | | CN8204 | 1-817-609-21 | PIN, CONNECTOR (PC BOARD) 3P | | |
| 87 | | D2 | CONNECTOR | | CN8205 | 1-817-609-21 | PIN, CONNECTOR (PC BOARD) 3P | | |
| 88 | | D2 | CONNECTOR | | CN8206 | 1-774-730-21 | PIN, CONNECTOR (PC BOARD) 3P | | |
| 89 | | D2 | CONNECTOR | | CN8207 | 1-774-730-21 | PIN, CONNECTOR (PC BOARD) 3P | | |
| 90 | | D2 | CONNECTOR | | CN8208 | 1-774-730-21 | PIN, CONNECTOR (PC BOARD) 3P | | |
| 91 | | D2 | CONNECTOR | | CN8209 | 1-774-730-21 | PIN, CONNECTOR (PC BOARD) 3P | | |
| 92 | | D2 | CONNECTOR | | CN8210 | 1-580-057-11 | PIN, CONNECTOR (SMD) 4P | | |
| 93 | | D2 | DIODE | | D8201 | 8-719-820-41 | DIODE 1SS302 | | |
| 94 | | D2 | DIODE | | D8202 | 8-719-820-41 | DIODE 1SS302 | | |
| 95 | | D2 | DIODE | | D8203 | 8-719-988-61 | DIODE 1SS355TE-17 | | |
| 96 | | D2 | DIODE | | D8204 | 8-719-988-61 | DIODE 1SS355TE-17 | | |
| 97 | | D2 | DIODE | | D8205 | 8-719-820-41 | DIODE 1SS302 | | |
| 98 | | D2 | DIODE | | D8206 | 8-719-820-41 | DIODE 1SS302 | | |
| 99 | | D2 | DIODE | | D8207 | 8-719-820-41 | DIODE 1SS302 | | |
| 100 | | D2 | DIODE | | D8208 | 8-719-820-41 | DIODE 1SS302 | | |
| 101 | | D2 | DIODE | | D8209 | 8-719-820-41 | DIODE 1SS302 | | |
| 102 | | D2 | DIODE | | D8210 | 8-719-820-41 | DIODE 1SS302 | | |
| 103 | | D2 | DIODE | | D8211 | 8-719-069-54 | DIODE UDZSTE-175.1B | | |
| 104 | | D2 | DIODE | | D8212 | 8-719-069-54 | DIODE UDZSTE-175.1B | | |
| 105 | | D2 | DIODE | | D8213 | 8-719-069-54 | DIODE UDZSTE-175.1B | | |
| 106 | | D2 | DIODE | | D8214 | 8-719-069-54 | DIODE UDZSTE-175.1B | | |
| 107 | | D2 | DIODE | | D8215 | 8-719-820-41 | DIODE 1SS302 | | |
| 108 | | D2 | DIODE | | D8216 | 8-719-820-41 | DIODE 1SS302 | | |
| 109 | | D2 | DIODE | | D8217 | 8-719-820-41 | DIODE 1SS302 | | |
| 110 | | D2 | DIODE | | D8218 | 8-719-820-41 | DIODE 1SS302 | | |
| 111 | | D2 | DIODE | | D8219 | 8-719-820-41 | DIODE 1SS302 | | |
| 112 | | D2 | DIODE | | D8220 | 8-719-820-41 | DIODE 1SS302 | | |
| 113 | | D2 | DIODE | | D8221 | 8-719-988-61 | DIODE 1SS355TE-17 | | |
| 114 | | D2 | DIODE | | D8222 | 8-719-988-61 | DIODE 1SS355TE-17 | | |
| 115 | | D2 | DIODE | | D8223 | 8-719-820-41 | DIODE 1SS302 | | |
| 116 | | D2 | DIODE | | D8224 | 8-719-820-41 | DIODE 1SS302 | | |
| 117 | | D2 | DIODE | | D8225 | 8-719-988-61 | DIODE 1SS355TE-17 | | |
| 118 | | D2 | DIODE | | D8226 | 8-719-988-61 | DIODE 1SS355TE-17 | | |
| 119 | | D2 | DIODE | | D8227 | 8-719-988-61 | DIODE 1SS355TE-17 | | |
| 120 | | D2 | DIODE | | D8228 | 8-719-988-61 | DIODE 1SS355TE-17 | | |
| 121 | | D2 | DIODE | | D8229 | 8-719-988-61 | DIODE 1SS355TE-17 | | |
| 122 | | D2 | DIODE | | D8230 | 8-719-988-61 | DIODE 1SS355TE-17 | | |
| 123 | | D2 | IC | | IC8201 | 6-704-253-01 | IC BD9766FV-E2 | | |
| 124 | | D2 | IC | | IC8202 | 6-704-253-01 | IC BD9766FV-E2 | | |
| 125 | | D2 | IC | | IC8203 | 6-702-593-01 | IC BA10358FV-E2 | | |
| 126 | | D2 | IC LINK | △ | PS8201 | 1-576-736-21 | IC LINK 3.15A 24V | | |
| 127 | | D2 | IC LINK | △ | PS8202 | 1-576-736-21 | IC LINK 3.15A 24V | | |
| 128 | | D2 | IC LINK | △ | PS8203 | 1-576-736-21 | IC LINK 3.15A 24V | | |
| 129 | | D2 | IC LINK | △ | PS8204 | 1-576-736-21 | IC LINK 3.15A 24V | | |
| 130 | | D2 | TRANSISTOR | | Q8201 | 8-729-054-36 | TRANSISTOR UPA1716G-E2 | | |
| 131 | | D2 | TRANSISTOR | | Q8202 | 8-729-054-36 | TRANSISTOR UPA1716G-E2 | | |
| 132 | | D2 | TRANSISTOR | | Q8203 | 8-729-054-36 | TRANSISTOR UPA1716G-E2 | | |
| 133 | | D2 | TRANSISTOR | | Q8204 | 8-729-054-36 | TRANSISTOR UPA1716G-E2 | | |
| 134 | | D2 | TRANSISTOR | | Q8207 | 8-729-048-50 | TRANSISTOR 2SK3018-T106 | | |
| 135 | | D2 | TRANSISTOR | | Q8208 | 8-729-046-04 | TRANSISTOR FDS6690A | | |
| 136 | | D2 | TRANSISTOR | | Q8209 | 8-729-046-04 | TRANSISTOR FDS6690A | | |
| 137 | | D2 | TRANSISTOR | | Q8210 | 8-729-046-04 | TRANSISTOR FDS6690A | | |
| 138 | | D2 | TRANSISTOR | | Q8211 | 8-729-046-04 | TRANSISTOR FDS6690A | | |
| 139 | | D2 | TRANSISTOR | | Q8212 | 8-729-048-50 | TRANSISTOR 2SK3018-T106 | | |
| 140 | | D2 | TRANSISTOR | | Q8213 | 6-550-555-01 | TRANSISTOR UMH2NL02TN | | |
| 141 | | D2 | TRANSISTOR | | Q8214 | 6-550-555-01 | TRANSISTOR UMH2NL02TN | | |
| 142 | | D2 | TRANSISTOR | | Q8215 | 8-729-050-11 | TRANSISTOR UMW1NTR | | |
| 143 | | D2 | TRANSISTOR | | Q8216 | 6-550-555-01 | TRANSISTOR UMH2NL02TN | | |
| 144 | | D2 | TRANSISTOR | | Q8217 | 6-550-555-01 | TRANSISTOR UMH2NL02TN | | |
| 145 | | D2 | TRANSISTOR | | Q8218 | 8-729-050-11 | TRANSISTOR UMW1NTR | | |
| 146 | | D2 | RESISTOR | | R8201 | 1-218-683-11 | METAL CHIP 430 0.5% 1/10W | | |

| No. | # | Board | Type | Δ /* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|-------------|-------------|----------|--------------|----------------------------|-----------|-----------|
| 147 | | D2 | RESISTOR | | R8202 | 1-218-651-11 | METAL CHIP 20 0.5% 1/10W | | |
| 148 | | D2 | RESISTOR | | R8203 | 1-218-683-11 | METAL CHIP 430 0.5% 1/10W | | |
| 149 | | D2 | RESISTOR | | R8204 | 1-218-651-11 | METAL CHIP 20 0.5% 1/10W | | |
| 150 | | D2 | RESISTOR | | R8205 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 151 | | D2 | RESISTOR | | R8206 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 152 | | D2 | RESISTOR | | R8207 | 1-218-738-11 | METAL CHIP 82K 0.5% 1/10W | | |
| 153 | | D2 | RESISTOR | | R8208 | 1-218-752-11 | METAL CHIP 330K 0.5% 1/10W | | |
| 154 | | D2 | RESISTOR | | R8209 | 1-218-738-11 | METAL CHIP 82K 0.5% 1/10W | | |
| 155 | | D2 | RESISTOR | | R8210 | 1-218-752-11 | METAL CHIP 330K 0.5% 1/10W | | |
| 156 | | D2 | RESISTOR | | R8211 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 157 | | D2 | RESISTOR | | R8212 | 1-218-740-11 | METAL CHIP 100K 0.5% 1/10W | | |
| 158 | | D2 | RESISTOR | | R8213 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 159 | | D2 | RESISTOR | | R8214 | 1-218-740-11 | METAL CHIP 100K 0.5% 1/10W | | |
| 160 | | D2 | RESISTOR | | R8215 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 161 | | D2 | RESISTOR | | R8216 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 162 | | D2 | RESISTOR | | R8217 | 1-218-725-11 | METAL CHIP 24K 0.5% 1/10W | | |
| 163 | | D2 | RESISTOR | | R8218 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 164 | | D2 | RESISTOR | | R8219 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 165 | | D2 | RESISTOR | | R8220 | 1-218-725-11 | METAL CHIP 24K 0.5% 1/10W | | |
| 166 | | D2 | RESISTOR | | R8221 | 1-218-738-11 | METAL CHIP 82K 0.5% 1/10W | | |
| 167 | | D2 | RESISTOR | | R8222 | 1-218-738-11 | METAL CHIP 82K 0.5% 1/10W | | |
| 168 | | D2 | RESISTOR | | R8223 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | | |
| 169 | | D2 | RESISTOR | | R8224 | 1-218-741-11 | METAL CHIP 110K 0.5% 1/10W | | |
| 170 | | D2 | RESISTOR | | R8225 | 1-218-736-11 | METAL CHIP 68K 0.5% 1/10W | | |
| 171 | | D2 | RESISTOR | | R8226 | 1-218-736-11 | METAL CHIP 68K 0.5% 1/10W | | |
| 172 | | D2 | RESISTOR | | R8227 | 1-216-864-11 | SHORT CHIP 0 | | |
| 173 | | D2 | RESISTOR | | R8228 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 174 | | D2 | RESISTOR | | R8229 | 1-218-718-11 | METAL CHIP 12K 0.5% 1/10W | | |
| 175 | | D2 | RESISTOR | | R8230 | 1-218-706-11 | METAL CHIP 3.9K 0.5% 1/10W | | |
| 176 | | D2 | RESISTOR | | R8231 | 1-218-707-11 | METAL CHIP 4.3K 0.5% 1/10W | | |
| 177 | | D2 | RESISTOR | | R8232 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 178 | | D2 | RESISTOR | | R8233 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 179 | | D2 | RESISTOR | | R8234 | 1-218-740-11 | METAL CHIP 100K 0.5% 1/10W | | |
| 180 | | D2 | RESISTOR | | R8235 | 1-218-740-11 | METAL CHIP 100K 0.5% 1/10W | | |
| 181 | | D2 | RESISTOR | | R8236 | 1-218-752-11 | METAL CHIP 330K 0.5% 1/10W | | |
| 182 | | D2 | RESISTOR | | R8237 | 1-218-720-11 | METAL CHIP 15K 0.5% 1/10W | | |
| 183 | | D2 | RESISTOR | | R8238 | 1-218-738-11 | METAL CHIP 82K 0.5% 1/10W | | |
| 184 | | D2 | RESISTOR | | R8239 | 1-218-752-11 | METAL CHIP 330K 0.5% 1/10W | | |
| 185 | | D2 | RESISTOR | | R8240 | 1-218-738-11 | METAL CHIP 82K 0.5% 1/10W | | |
| 186 | | D2 | RESISTOR | | R8241 | 1-218-752-11 | METAL CHIP 330K 0.5% 1/10W | | |
| 187 | | D2 | RESISTOR | | R8242 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 188 | | D2 | RESISTOR | | R8243 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 189 | | D2 | RESISTOR | | R8244 | 1-218-683-11 | METAL CHIP 430 0.5% 1/10W | | |
| 190 | | D2 | RESISTOR | | R8245 | 1-218-651-11 | METAL CHIP 20 0.5% 1/10W | | |
| 191 | | D2 | RESISTOR | | R8246 | 1-218-683-11 | METAL CHIP 430 0.5% 1/10W | | |
| 192 | | D2 | RESISTOR | | R8247 | 1-218-651-11 | METAL CHIP 20 0.5% 1/10W | | |
| 193 | | D2 | RESISTOR | | R8248 | 1-218-734-11 | METAL CHIP 56K 0.5% 1/10W | | |
| 194 | | D2 | RESISTOR | | R8249 | 1-218-725-11 | METAL CHIP 24K 0.5% 1/10W | | |
| 195 | | D2 | RESISTOR | | R8250 | 1-218-719-11 | METAL CHIP 13K 0.5% 1/10W | | |
| 196 | | D2 | RESISTOR | | R8251 | 1-218-692-11 | METAL CHIP 1K 0.5% 1/10W | | |
| 197 | | D2 | RESISTOR | | R8252 | 1-218-692-11 | METAL CHIP 1K 0.5% 1/10W | | |
| 198 | | D2 | RESISTOR | | R8253 | 1-218-692-11 | METAL CHIP 1K 0.5% 1/10W | | |
| 199 | | D2 | RESISTOR | | R8256 | 1-218-742-11 | METAL CHIP 120K 0.5% 1/10W | | |
| 200 | | D2 | RESISTOR | | R8257 | 1-218-742-11 | METAL CHIP 120K 0.5% 1/10W | | |
| 201 | | D2 | RESISTOR | | R8258 | 1-218-726-11 | METAL CHIP 27K 0.5% 1/10W | | |
| 202 | | D2 | RESISTOR | | R8259 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 203 | | D2 | RESISTOR | | R8260 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 204 | | D2 | RESISTOR | | R8261 | 1-216-864-11 | SHORT CHIP 0 | | |
| 205 | | D2 | RESISTOR | | R8262 | 1-216-864-11 | SHORT CHIP 0 | | |
| 206 | | D2 | RESISTOR | | R8267 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 207 | | D2 | RESISTOR | | R8268 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 208 | | D2 | RESISTOR | | R8269 | 1-216-864-11 | SHORT CHIP 0 | | |
| 209 | | D2 | RESISTOR | | R8270 | 1-216-864-11 | SHORT CHIP 0 | | |
| 210 | | D2 | TRANSFORMER | | T8201 | 1-439-851-11 | TRANSFORMER, INVERTER | | |
| 211 | | D2 | TRANSFORMER | | T8202 | 1-439-851-11 | TRANSFORMER, INVERTER | | |
| 212 | | D2 | TRANSFORMER | | T8203 | 1-439-851-11 | TRANSFORMER, INVERTER | | |
| 213 | | D2 | TRANSFORMER | | T8204 | 1-439-851-11 | TRANSFORMER, INVERTER | | |
| 214 | | D2 | TRANSFORMER | | T8205 | 1-439-851-11 | TRANSFORMER, INVERTER | | |
| 215 | | D2 | TRANSFORMER | | T8206 | 1-439-851-11 | TRANSFORMER, INVERTER | | |
| 216 | | D2 | TRANSFORMER | | T8207 | 1-439-851-11 | TRANSFORMER, INVERTER | | |
| 217 | | D2 | TRANSFORMER | | T8208 | 1-439-851-11 | TRANSFORMER, INVERTER | | |
| 218 | | D2 | TRANSFORMER | | T8209 | 1-439-851-11 | TRANSFORMER, INVERTER | | |
| 219 | | D2 | TRANSFORMER | | T8210 | 1-439-851-11 | TRANSFORMER, INVERTER | | |

| No. | # | Board | Type | Δ /* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|-------------|-------------|----------|--------------|----------------------------------|-----------|-----------|
| 220 | | D2 | TRANSFORMER | | T8211 | 1-439-851-11 | TRANSFORMER, INVERTER | | |
| 221 | | D2 | TRANSFORMER | | T8212 | 1-439-851-11 | TRANSFORMER, INVERTER | | |
| 222 | | B | CAPACITOR | | C1002 | 1-126-391-11 | ELECT CHIP 47UF 20.00% 6.3V | | |
| 223 | | B | CAPACITOR | | C1003 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 224 | | B | CAPACITOR | | C1005 | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V | | |
| 225 | | B | CAPACITOR | | C1006 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 226 | | B | CAPACITOR | | C1007 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | | |
| 227 | | B | CAPACITOR | | C1008 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 228 | | B | CAPACITOR | | C1009 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 229 | | B | CAPACITOR | | C1010 | 1-162-917-11 | CERAMIC CHIP 15PF 5.00% 50V | | |
| 230 | | B | CAPACITOR | | C1011 | 1-162-917-11 | CERAMIC CHIP 15PF 5.00% 50V | | |
| 231 | | B | CAPACITOR | | C1012 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 232 | | B | CAPACITOR | | C1013 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 233 | | B | CAPACITOR | | C1014 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 234 | | B | CAPACITOR | | C1015 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 235 | | B | CAPACITOR | | C1016 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 236 | | B | CAPACITOR | | C1017 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 237 | | B | CAPACITOR | | C1018 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 238 | | B | CAPACITOR | | C1019 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 239 | | B | CAPACITOR | | C1028 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 240 | | B | CAPACITOR | | C1040 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 241 | | B | CAPACITOR | | C1041 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 242 | | B | CAPACITOR | | C1042 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 243 | | B | CAPACITOR | | C1043 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 244 | | B | CAPACITOR | | C1044 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 245 | | B | CAPACITOR | | C1045 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 246 | | B | CAPACITOR | | C1048 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 247 | | B | CAPACITOR | | C1049 | 1-164-947-11 | CERAMIC CHIP 0.01UF 50V | | |
| 248 | | B | CAPACITOR | | C1050 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 249 | | B | CAPACITOR | | C1051 | 1-125-837-91 | CERAMIC CHIP 1UF 10% 6.3V | | |
| 250 | | B | CAPACITOR | | C1054 | 1-126-391-11 | ELECT CHIP 47UF 20.00% 6.3V | | |
| 251 | | B | CAPACITOR | | C1055 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 252 | | B | CAPACITOR | | C1057 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 253 | | B | CAPACITOR | | C1059 | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 254 | | B | CAPACITOR | | C1060 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 255 | | B | CAPACITOR | | C1192 | 1-126-390-11 | ELECT CHIP 22UF 20.00% 6.3V | | |
| 256 | | B | CAPACITOR | | C3002 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 257 | | B | CAPACITOR | | C3003 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 258 | | B | CAPACITOR | | C3011 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 259 | | B | CAPACITOR | | C3012 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 260 | | B | CAPACITOR | | C3015 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 261 | | B | CAPACITOR | | C3017 | 1-128-357-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 262 | | B | CAPACITOR | | C3024 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 263 | | B | CAPACITOR | | C3025 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 264 | | B | CAPACITOR | | C3026 | 1-126-392-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 265 | | B | CAPACITOR | | C3027 | 1-126-392-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 266 | | B | CAPACITOR | | C3028 | 1-126-400-11 | ELECT CHIP 22UF 20.00% 35V | | |
| 267 | | B | CAPACITOR | | C3029 | 1-126-400-11 | ELECT CHIP 22UF 20.00% 35V | | |
| 268 | | B | CAPACITOR | | C3030 | 1-126-400-11 | ELECT CHIP 22UF 20.00% 35V | | |
| 269 | | B | CAPACITOR | | C3031 | 1-126-392-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 270 | | B | CAPACITOR | | C3032 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 271 | | B | CAPACITOR | | C3033 | 1-126-392-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 272 | | B | CAPACITOR | | C3034 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 273 | | B | CAPACITOR | | C3035 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 274 | | B | CAPACITOR | | C3036 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 275 | | B | CAPACITOR | | C3037 | 1-126-392-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 276 | | B | CAPACITOR | | C3038 | 1-126-390-11 | ELECT CHIP 22UF 20.00% 6.3V | | |
| 277 | | B | CAPACITOR | | C3039 | 1-126-390-11 | ELECT CHIP 22UF 20.00% 6.3V | | |
| 278 | | B | CAPACITOR | | C3040 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 279 | | B | CAPACITOR | | C3041 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 280 | | B | CAPACITOR | | C3042 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 281 | | B | CAPACITOR | | C3043 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 282 | | B | CAPACITOR | | C3044 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 283 | | B | CAPACITOR | | C3045 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 284 | | B | CAPACITOR | | C3046 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 285 | | B | CAPACITOR | | C3047 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 286 | | B | CAPACITOR | | C3048 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 287 | | B | CAPACITOR | | C3049 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 288 | | B | CAPACITOR | | C3050 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 289 | | B | CAPACITOR | | C3051 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 290 | | B | CAPACITOR | | C3052 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 291 | | B | CAPACITOR | | C3053 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 292 | | B | CAPACITOR | | C3054 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |

| No. | # | Board | Type | Δ/μ | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|-----------|--------------|----------|--------------|---------------------------------|-----------|-----------|
| 293 | | B | CAPACITOR | | C3055 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 294 | | B | CAPACITOR | | C3056 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 295 | | B | CAPACITOR | | C3057 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 296 | | B | CAPACITOR | | C3059 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 297 | | B | CAPACITOR | | C3060 | 1-137-710-11 | CERAMIC CHIP 10UF 20% 6.3V | | |
| 298 | | B | CAPACITOR | | C3061 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 299 | | B | CAPACITOR | | C3062 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 300 | | B | CAPACITOR | | C3063 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 301 | | B | CAPACITOR | | C3064 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 302 | | B | CAPACITOR | | C3065 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 303 | | B | CAPACITOR | | C3066 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 304 | | B | CAPACITOR | | C3067 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 305 | | B | CAPACITOR | | C3068 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 306 | | B | CAPACITOR | | C3069 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 307 | | B | CAPACITOR | | C3070 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 308 | | B | CAPACITOR | | C3071 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 309 | | B | CAPACITOR | | C3072 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 310 | | B | CAPACITOR | | C3073 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 311 | | B | CAPACITOR | | C3074 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 312 | | B | CAPACITOR | | C3075 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 313 | | B | CAPACITOR | | C3076 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 314 | | B | CAPACITOR | | C3077 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 315 | | B | CAPACITOR | | C3078 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 316 | | B | CAPACITOR | | C3079 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 317 | | B | CAPACITOR | | C3080 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 318 | | B | CAPACITOR | | C3081 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 319 | | B | CAPACITOR | | C3082 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 320 | | B | CAPACITOR | | C3083 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 321 | | B | CAPACITOR | | C3084 | 1-100-159-91 | CERAMIC CHIP 22UF 10% 6.3V | | |
| 322 | | B | CAPACITOR | | C3085 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 323 | | B | CAPACITOR | | C3088 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 324 | | B | CAPACITOR | | C3089 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 325 | | B | CAPACITOR | | C3090 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 326 | | B | CAPACITOR | | C3091 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 327 | | B | CAPACITOR | | C3093 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 328 | | B | CAPACITOR | | C3094 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 329 | | B | CAPACITOR | | C3095 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 330 | | B | CAPACITOR | | C3096 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 331 | | B | CAPACITOR | | C3097 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 332 | | B | CAPACITOR | | C3098 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 333 | | B | CAPACITOR | | C3100 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 334 | | B | CAPACITOR | | C3101 | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 335 | | B | CAPACITOR | | C3102 | 1-137-710-11 | CERAMIC CHIP 10UF 20% 6.3V | | |
| 336 | | B | CAPACITOR | | C3103 | 1-137-710-11 | CERAMIC CHIP 10UF 20% 6.3V | | |
| 337 | | B | CAPACITOR | | C3104 | 1-164-874-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 338 | | B | CAPACITOR | | C3105 | 1-164-874-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 339 | | B | CAPACITOR | | C3106 | 1-164-874-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 340 | | B | CAPACITOR | | C3107 | 1-164-874-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 341 | | B | CAPACITOR | | C3108 | 1-164-874-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 342 | | B | CAPACITOR | | C3109 | 1-164-874-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 343 | | B | CAPACITOR | | C3110 | 1-164-874-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 344 | | B | CAPACITOR | | C3301 | 1-119-667-11 | CERAMIC CHIP 22UF 10V | | |
| 345 | | B | CAPACITOR | | C3302 | 1-125-837-91 | CERAMIC CHIP 1UF 10% 6.3V | | |
| 346 | | B | CAPACITOR | | C3304 | 1-164-315-11 | CERAMIC CHIP 470PF 5.00% 50V | | |
| 347 | | B | CAPACITOR | | C3305 | 1-137-710-11 | CERAMIC CHIP 10UF 20% 6.3V | | |
| 348 | | B | CAPACITOR | | C3306 | 1-100-159-91 | CERAMIC CHIP 22UF 10% 6.3V | | |
| 349 | | B | CAPACITOR | | C3307 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 350 | | B | CAPACITOR | | C3308 | 1-100-159-91 | CERAMIC CHIP 22UF 10% 6.3V | | |
| 351 | | B | CAPACITOR | | C3309 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 352 | | B | CAPACITOR | | C3310 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 353 | | B | CAPACITOR | | C3311 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 354 | | B | CAPACITOR | | C3312 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 355 | | B | CAPACITOR | | C3313 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 356 | | B | CAPACITOR | | C3314 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 357 | | B | CAPACITOR | | C3315 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 358 | | B | CAPACITOR | | C3316 | 1-100-159-91 | CERAMIC CHIP 22UF 10% 6.3V | | |
| 359 | | B | CAPACITOR | | C3317 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 360 | | B | CAPACITOR | | C3318 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 361 | | B | CAPACITOR | | C3319 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 362 | | B | CAPACITOR | | C3320 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 363 | | B | CAPACITOR | | C3321 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 364 | | B | CAPACITOR | | C3322 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 365 | | B | CAPACITOR | | C3323 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |

| No. | # | Board | Type | Δ /* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|-----------|-------------|----------|--------------|--------------------------------|-----------|-----------|
| 366 | | B | CAPACITOR | | C3324 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 367 | | B | CAPACITOR | | C3325 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 368 | | B | CAPACITOR | | C3326 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 369 | | B | CAPACITOR | | C3327 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 370 | | B | CAPACITOR | | C3328 | 1-119-667-11 | CERAMIC CHIP 22UF 10V | | |
| 371 | | B | CAPACITOR | | C3329 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 372 | | B | CAPACITOR | | C3330 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 373 | | B | CAPACITOR | | C3331 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 374 | | B | CAPACITOR | | C3332 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 375 | | B | CAPACITOR | | C3333 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 376 | | B | CAPACITOR | | C3334 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 377 | | B | CAPACITOR | | C3335 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 378 | | B | CAPACITOR | | C3336 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 379 | | B | CAPACITOR | | C3337 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 380 | | B | CAPACITOR | | C3338 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 381 | | B | CAPACITOR | | C3339 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 382 | | B | CAPACITOR | | C3340 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 383 | | B | CAPACITOR | | C3341 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 384 | | B | CAPACITOR | | C3342 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 385 | | B | CAPACITOR | | C3343 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 386 | | B | CAPACITOR | | C3344 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 387 | | B | CAPACITOR | | C3345 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 388 | | B | CAPACITOR | | C3346 | 1-126-391-11 | ELECT CHIP 47UF 20.00% 6.3V | | |
| 389 | | B | CAPACITOR | | C3347 | 1-100-159-91 | CERAMIC CHIP 22UF 10% 6.3V | | |
| 390 | | B | CAPACITOR | | C3348 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 391 | | B | CAPACITOR | | C3350 | 1-100-159-91 | CERAMIC CHIP 22UF 10% 6.3V | | |
| 392 | | B | CAPACITOR | | C3351 | 1-107-820-11 | CERAMIC CHIP 0.1UF 16V | | |
| 393 | | B | CAPACITOR | | C3600 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 394 | | B | CAPACITOR | | C3601 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 395 | | B | CAPACITOR | | C3602 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 396 | | B | CAPACITOR | | C3603 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 397 | | B | CAPACITOR | | C3604 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 398 | | B | CAPACITOR | | C3605 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 399 | | B | CAPACITOR | | C3606 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 400 | | B | CAPACITOR | | C3607 | 1-127-760-11 | CERAMIC CHIP 4.7UF 10% 6.3V | | |
| 401 | | B | CAPACITOR | | C3608 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 402 | | B | CAPACITOR | | C3609 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 403 | | B | CAPACITOR | | C3610 | 1-128-995-21 | ELECT CHIP 100UF 20% 10V | | |
| 404 | | B | CAPACITOR | | C3611 | 1-164-230-11 | CERAMIC CHIP 220PF 5.00% 50V | | |
| 405 | | B | CAPACITOR | | C3612 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 406 | | B | CAPACITOR | | C3613 | 1-128-995-21 | ELECT CHIP 100UF 20% 10V | | |
| 407 | | B | CAPACITOR | | C3614 | 1-109-982-11 | CERAMIC CHIP 1UF 10.00% 10V | | |
| 408 | | B | CAPACITOR | | C5001 | 1-162-919-11 | CERAMIC CHIP 22PF 5.00% 50V | | |
| 409 | | B | CAPACITOR | | C5002 | 1-162-919-11 | CERAMIC CHIP 22PF 5.00% 50V | | |
| 410 | | B | CAPACITOR | | C5003 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 411 | | B | CAPACITOR | | C5004 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 412 | | B | CAPACITOR | | C5005 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 413 | | B | CAPACITOR | | C5006 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 414 | | B | CAPACITOR | | C5007 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 415 | | B | CAPACITOR | | C5008 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 416 | | B | CAPACITOR | | C5009 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 417 | | B | CAPACITOR | | C5010 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 418 | | B | CAPACITOR | | C5011 | 1-162-962-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 419 | | B | CAPACITOR | | C5012 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 420 | | B | CAPACITOR | | C5013 | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 421 | | B | CAPACITOR | | C5014 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 422 | | B | CAPACITOR | | C5015 | 1-162-905-11 | CERAMIC CHIP 1PF 0.25PF 50V | | |
| 423 | | B | CAPACITOR | | C5016 | 1-125-837-91 | CERAMIC CHIP 1UF 10% 6.3V | | |
| 424 | | B | CAPACITOR | | C5017 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 425 | | B | CAPACITOR | | C5018 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 426 | | B | CAPACITOR | | C5019 | 1-125-837-91 | CERAMIC CHIP 1UF 10% 6.3V | | |
| 427 | | B | CAPACITOR | | C5020 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 428 | | B | CAPACITOR | | C5023 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 429 | | B | CAPACITOR | | C5024 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 430 | | B | CAPACITOR | | C5025 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 431 | | B | CAPACITOR | | C5026 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 432 | | B | CAPACITOR | | C5027 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 433 | | B | CAPACITOR | | C5028 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 434 | | B | CAPACITOR | | C5029 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 435 | | B | CAPACITOR | | C5030 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 436 | | B | CAPACITOR | | C5031 | 1-137-710-11 | CERAMIC CHIP 10UF 20% 6.3V | | |
| 437 | | B | CAPACITOR | | C5032 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 438 | | B | CAPACITOR | | C5033 | 1-137-710-11 | CERAMIC CHIP 10UF 20% 6.3V | | |

| No. | # | Board | Type | Δ/μ | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|-----------|--------------|----------|--------------|--------------------------------|-----------|-----------|
| 439 | | B | CAPACITOR | | C5034 | 1-100-159-91 | CERAMIC CHIP 22UF 10% 6.3V | | |
| 440 | | B | CAPACITOR | | C5035 | 1-100-159-91 | CERAMIC CHIP 22UF 10% 6.3V | | |
| 441 | | B | CAPACITOR | | C5036 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 442 | | B | CAPACITOR | | C5037 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 443 | | B | CAPACITOR | | C5039 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 444 | | B | CAPACITOR | | C5040 | 1-126-392-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 445 | | B | CAPACITOR | | C5041 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 446 | | B | CAPACITOR | | C5042 | 1-126-392-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 447 | | B | CAPACITOR | | C5801 | 1-100-159-91 | CERAMIC CHIP 22UF 10% 6.3V | | |
| 448 | | B | CAPACITOR | | C5802 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 449 | | B | CAPACITOR | | C5803 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 450 | | B | CAPACITOR | | C5804 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 451 | | B | CAPACITOR | | C5805 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 452 | | B | CAPACITOR | | C5806 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 453 | | B | CAPACITOR | | C5807 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 454 | | B | CAPACITOR | | C5808 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 455 | | B | CAPACITOR | | C5809 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 456 | | B | CAPACITOR | | C5810 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 457 | | B | CAPACITOR | | C5811 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 458 | | B | CAPACITOR | | C5812 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 459 | | B | CAPACITOR | | C5813 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 460 | | B | CAPACITOR | | C5814 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 461 | | B | CAPACITOR | | C5815 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 462 | | B | CAPACITOR | | C5816 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 463 | | B | CAPACITOR | | C5817 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 464 | | B | CAPACITOR | | C5818 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 465 | | B | CAPACITOR | | C5819 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 466 | | B | CAPACITOR | | C5820 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 467 | | B | CAPACITOR | | C5821 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 468 | | B | CAPACITOR | | C5822 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 469 | | B | CAPACITOR | | C5823 | 1-126-390-11 | ELECT CHIP 22UF 20.00% 6.3V | | |
| 470 | | B | CAPACITOR | | C5824 | 1-128-934-91 | CERAMIC CHIP 0.33UF 20% 10V | | |
| 471 | | B | CAPACITOR | | C5825 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 472 | | B | CAPACITOR | | C5826 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 473 | | B | CAPACITOR | | C5827 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 474 | | B | CAPACITOR | | C5828 | 1-162-915-11 | CERAMIC CHIP 10PF 0.50PF 50V | | |
| 475 | | B | CAPACITOR | | C5829 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 476 | | B | CAPACITOR | | C5830 | 1-162-910-11 | CERAMIC CHIP 5PF 0.25PF 50V | | |
| 477 | | B | CAPACITOR | | C5831 | 1-126-412-11 | ELECT CHIP 220UF 20.00% 4V | | |
| 478 | | B | CAPACITOR | | C5832 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 479 | | B | CAPACITOR | | C5833 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 480 | | B | CAPACITOR | | C5835 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 481 | | B | CAPACITOR | | C5836 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 482 | | B | CAPACITOR | | C5837 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 483 | | B | CAPACITOR | | C5838 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 484 | | B | CAPACITOR | | C5839 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 485 | | B | CAPACITOR | | C5840 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 486 | | B | CAPACITOR | | C5841 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 487 | | B | CAPACITOR | | C5842 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 488 | | B | CAPACITOR | | C5843 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 489 | | B | CAPACITOR | | C5844 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 490 | | B | CAPACITOR | | C5845 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 491 | | B | CAPACITOR | | C5846 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 492 | | B | CAPACITOR | | C5847 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 493 | | B | CAPACITOR | | C5848 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 494 | | B | CAPACITOR | | C5849 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 495 | | B | CAPACITOR | | C5850 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 496 | | B | CAPACITOR | | C5851 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 497 | | B | CAPACITOR | | C5852 | 1-125-777-11 | CERAMIC CHIP 0.1UF 10.00% 10V | | |
| 498 | | B | CAPACITOR | | C5853 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 499 | | B | CAPACITOR | | C5854 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 500 | | B | CAPACITOR | | C5855 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 501 | | B | CAPACITOR | | C5856 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 502 | | B | CAPACITOR | | C5857 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 503 | | B | CAPACITOR | | C5858 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 504 | | B | CAPACITOR | | C5859 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 505 | | B | CAPACITOR | | C5860 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 506 | | B | CAPACITOR | | C5861 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 507 | | B | CAPACITOR | | C5862 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 508 | | B | CAPACITOR | | C5863 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 509 | | B | CAPACITOR | | C5864 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 510 | | B | CAPACITOR | | C5865 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 511 | | B | CAPACITOR | | C5866 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |

| No. | # | Board | Type | Δ /* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|--------------|-------------|----------|--------------|---------------------------------|-----------|-----------|
| 512 | | B | CAPACITOR | | C5867 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 513 | | B | CAPACITOR | | C5868 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 514 | | B | CAPACITOR | | C5869 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 515 | | B | CAPACITOR | | C5870 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 516 | | B | CAPACITOR | | C5871 | 1-126-392-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 517 | | B | CAPACITOR | | C5872 | 1-126-392-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 518 | | B | CAPACITOR | | C5873 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 519 | | B | CAPACITOR | | C5874 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 520 | | B | CAPACITOR | | C5875 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 521 | | B | CAPACITOR | | C5876 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 522 | | B | CAPACITOR | | C5877 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 523 | | B | CAPACITOR | | C5878 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 524 | | B | CAPACITOR | | C5879 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 525 | | B | CAPACITOR | | C5880 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 526 | | B | CAPACITOR | | C5881 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 527 | | B | CAPACITOR | | C5882 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 528 | | B | CAPACITOR | | C5883 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 529 | | B | CAPACITOR | | C5884 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 530 | | B | CAPACITOR | | C5885 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 531 | | B | CAPACITOR | | C5886 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 532 | | B | CAPACITOR | | C5887 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 533 | | B | CAPACITOR | | C5888 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 534 | | B | CAPACITOR | | C5889 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 535 | | B | CAPACITOR | | C5890 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 536 | | B | CAPACITOR | | C5891 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 537 | | B | CAPACITOR | | C5892 | 1-164-943-11 | CERAMIC CHIP 0.01UF 10.00% 16V | | |
| 538 | | B | CAPACITOR | | C5893 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 539 | | B | CAPACITOR | | C5894 | 1-164-935-11 | CERAMIC CHIP 470PF 10.00% 50V | | |
| 540 | | B | CAPACITOR | | C5895 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 541 | | B | CONNECTOR | | CN1002 | 1-779-936-21 | CONNECTOR, FFC/FPC 18P | | |
| 542 | | B | CONNECTOR | | CN1003 | 1-774-769-11 | CONNECTOR, FFC/FPC 25P | | |
| 543 | | B | CONNECTOR | * | CN1004 | 1-766-376-11 | PIN, CONNECTOR (1.5MM)(SMD) 9P | | |
| 544 | | B | CONNECTOR | | CN1005 | 1-774-769-11 | CONNECTOR, FFC/FPC 25P | | |
| 545 | | B | CONNECTOR | | CN1007 | 1-774-769-11 | CONNECTOR, FFC/FPC 25P | | |
| 546 | | B | CONNECTOR | | CN1008 | 1-691-550-11 | PIN, CONNECTOR (1.5MM)(SMD) 3P | | |
| 547 | | B | CONNECTOR | * | CN1009 | 1-764-250-11 | PIN, CONNECTOR (PC BOARD) 4P | | |
| 548 | | B | CONNECTOR | * | CN5801 | 1-816-544-22 | PIN, CONNECTOR (PC BOARD) 20P | | |
| 549 | | B | DIODE | | D1002 | 8-719-024-77 | DIODE HN1D03FU-TE85L | | |
| 550 | | B | DIODE | | D1003 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 551 | | B | DIODE | | D1005 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 552 | | B | DIODE | | D1006 | 8-719-077-59 | DIODE 1PS302 | | |
| 553 | | B | DIODE | | D1008 | 8-719-036-94 | DIODE RD5.6SB-T1 | | |
| 554 | | B | DIODE | | D1009 | 8-719-036-94 | DIODE RD5.6SB-T1 | | |
| 555 | | B | DIODE | | D1012 | 8-719-036-94 | DIODE RD5.6SB-T1 | | |
| 556 | | B | DIODE | | D1192 | 8-719-036-94 | DIODE RD5.6SB-T1 | | |
| 557 | | B | DIODE | | D5001 | 8-719-066-11 | DIODE 1PS184-115 | | |
| 558 | | B | DIODE | | D5002 | 8-719-066-11 | DIODE 1PS184-115 | | |
| 559 | | B | DIODE | | D5004 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 560 | | B | DIODE | | D5005 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 561 | | B | DIODE | | D5006 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 562 | | B | FERRITE BEAD | | FB1001 | 1-414-445-11 | FERRITE 0UH | | |
| 563 | | B | FERRITE BEAD | | FB1002 | 1-414-445-11 | FERRITE 0UH | | |
| 564 | | B | FERRITE BEAD | | FB1003 | 1-469-775-21 | FERRITE 0UH | | |
| 565 | | B | FERRITE BEAD | | FB1004 | 1-414-445-11 | FERRITE 0UH | | |
| 566 | | B | FERRITE BEAD | | FB3009 | 1-414-234-22 | FERRITE 0UH | | |
| 567 | | B | FERRITE BEAD | | FB3301 | 1-414-445-11 | FERRITE 0UH | | |
| 568 | | B | FERRITE BEAD | | FB3302 | 1-414-864-11 | FERRITE 0UH | | |
| 569 | | B | FERRITE BEAD | | FB3303 | 1-414-445-11 | FERRITE 0UH | | |
| 570 | | B | FERRITE BEAD | | FB3304 | 1-414-445-11 | FERRITE 0UH | | |
| 571 | | B | FERRITE BEAD | | FB3305 | 1-414-445-11 | FERRITE 0UH | | |
| 572 | | B | FERRITE BEAD | | FB5001 | 1-414-445-11 | FERRITE 0UH | | |
| 573 | | B | FERRITE BEAD | | FB5002 | 1-414-445-11 | FERRITE 0UH | | |
| 574 | | B | FERRITE BEAD | | FB5003 | 1-414-445-11 | FERRITE 0UH | | |
| 575 | | B | FERRITE BEAD | | FB5004 | 1-414-445-11 | FERRITE 0UH | | |
| 576 | | B | FERRITE BEAD | | FB5005 | 1-414-445-11 | FERRITE 0UH | | |
| 577 | | B | FERRITE BEAD | | FB5006 | 1-414-445-11 | FERRITE 0UH | | |
| 578 | | B | FERRITE BEAD | | FB5007 | 1-414-445-11 | FERRITE 0UH | | |
| 579 | | B | FERRITE BEAD | | FB5008 | 1-414-445-11 | FERRITE 0UH | | |
| 580 | | B | FERRITE BEAD | | FB5009 | 1-414-445-11 | FERRITE 0UH | | |
| 581 | | B | FERRITE BEAD | | FB5010 | 1-414-864-11 | FERRITE 0UH | | |
| 582 | | B | FERRITE BEAD | | FB5011 | 1-414-864-11 | FERRITE 0UH | | |
| 583 | | B | FERRITE BEAD | | FB5012 | 1-414-864-11 | FERRITE 0UH | | |
| 584 | | B | FERRITE BEAD | | FB5013 | 1-414-864-11 | FERRITE 0UH | | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|--------------|-----|----------|--------------|-----------------------------|-----------|-----------|
| 585 | | B | FERRITE BEAD | | FB5801 | 1-414-864-11 | FERRITE 0UH | | |
| 586 | | B | FERRITE BEAD | | FB5802 | 1-414-864-11 | FERRITE 0UH | | |
| 587 | | B | FERRITE BEAD | | FB5803 | 1-414-445-11 | FERRITE 0UH | | |
| 588 | | B | FERRITE BEAD | | FB5804 | 1-414-445-11 | FERRITE 0UH | | |
| 589 | | B | FERRITE BEAD | | FB5805 | 1-414-445-11 | FERRITE 0UH | | |
| 590 | | B | FERRITE BEAD | | FB5806 | 1-414-445-11 | FERRITE 0UH | | |
| 591 | | B | FERRITE BEAD | | FB5807 | 1-400-180-21 | INDUCTOR 0UH | | |
| 592 | | B | FILTER | | FL3001 | 1-234-560-21 | FILTER, LOW PASS | | |
| 593 | | B | FILTER | | FL3002 | 1-234-559-21 | FILTER, LOW PASS | | |
| 594 | | B | FILTER | | FL3003 | 1-234-559-21 | FILTER, LOW PASS | | |
| 595 | | B | FILTER | | FL3004 | 1-234-177-21 | FERRITE 0UH | | |
| 596 | | B | FILTER | | FL3005 | 1-234-177-21 | FERRITE 0UH | | |
| 597 | | B | FILTER | | FL3006 | 1-234-177-21 | FERRITE 0UH | | |
| 598 | | B | FILTER | | FL3007 | 1-234-177-21 | FERRITE 0UH | | |
| 599 | | B | FILTER | | FL3008 | 1-234-677-21 | FILTER, EMI | | |
| 600 | | B | FILTER | | FL3301 | 1-234-177-21 | FERRITE 0UH | | |
| 601 | | B | FILTER | | FL3302 | 1-234-177-21 | FERRITE 0UH | | |
| 602 | | B | FILTER | | FL3303 | 1-234-177-21 | FERRITE 0UH | | |
| 603 | | B | FILTER | | FL3304 | 1-234-177-21 | FERRITE 0UH | | |
| 604 | | B | FILTER | | FL5001 | 1-234-177-21 | FERRITE 0UH | | |
| 605 | | B | FILTER | | FL5801 | 1-234-177-21 | FERRITE 0UH | | |
| 606 | | B | FILTER | | FL5802 | 1-234-177-21 | FERRITE 0UH | | |
| 607 | | B | IC | | IC1001 | 8-759-460-72 | IC BA033FP-E2 | | |
| 608 | | B | IC | | IC1002 | 8-759-476-80 | IC LM75CIMX-3 | | |
| 609 | | B | IC | | IC1006 | 6-803-708-02 | IC HD64F2377VFQ33V-AT2U1000 | | |
| 610 | | B | IC | | IC1007 | 6-703-225-01 | IC S-80928CNMC-G8YT2G | | |
| 611 | | B | IC | | IC1008 | 6-702-688-01 | IC M24C64-WMN6T(B) | | |
| 612 | | B | IC | | IC1009 | 8-759-592-49 | IC TC7SZ125FU(TE85R) | | |
| 613 | | B | IC | | IC1010 | 8-759-549-03 | IC SN74LV132APWR | | |
| 614 | | B | IC | | IC3002 | 6-705-529-01 | IC LMH6658MMX/J5000172 | | |
| 615 | | B | IC | | IC3003 | 6-705-529-01 | IC LMH6658MMX/J5000172 | | |
| 616 | | B | IC | | IC3005 | 8-759-712-65 | IC PQ070XZ01ZP | | |
| 617 | | B | IC | | IC3006 | 8-759-712-65 | IC PQ070XZ01ZP | | |
| 618 | | B | IC | | IC3007 | 8-752-425-02 | IC CXD3802BQ | | |
| 619 | | B | IC | | IC3008 | 6-703-430-01 | IC MT48LC2M32B2TG-6-Y94W | | |
| 620 | | B | IC | | IC3301 | 6-700-227-01 | IC MM1561JFBE | | |
| 621 | | B | IC | | IC3302 | 8-752-422-52 | IC CXD2097BQ | | |
| 622 | | B | IC | | IC3303 | 6-703-791-01 | IC MSM56V16160F-8T3FM1 | | |
| 623 | | B | IC | | IC3304 | 8-759-669-78 | IC TLC2933IPWR-12 | | |
| 624 | | B | IC | | IC3600 | 8-752-937-39 | IC CXP964032-003R | | |
| 625 | | B | IC | | IC5001 | 6-803-707-01 | IC MX29LV800ATTC-70G-YSZ-1 | | |
| 626 | | B | IC | | IC5002 | 8-759-549-03 | IC SN74LV132APWR | | |
| 627 | | B | IC | | IC5003 | 8-759-669-44 | IC SN74LVC74APWR-12 | | |
| 628 | | B | IC | | IC5004 | 6-704-191-01 | IC S-80829CNNB-B8OT2G | | |
| 629 | | B | IC | | IC5005 | 6-704-192-01 | IC S-80822CNNB-B8HT2G | | |
| 630 | | B | IC | | IC5007 | 6-704-190-01 | IC SN74ALVCH16823DGGR | | |
| 631 | | B | IC | | IC5008 | 8-759-712-65 | IC PQ070XZ01ZP | | |
| 632 | | B | IC | | IC5009 | 8-759-712-65 | IC PQ070XZ01ZP | | |
| 633 | | B | IC | | IC5801 | 8-759-676-70 | IC MSM56V16160F-10TS-K | | |
| 634 | | B | IC | | IC5802 | 6-703-689-01 | IC CXD9756R | | |
| 635 | | B | IC | | IC5803 | 6-700-394-01 | IC BA25BC0FP-E2 | | |
| 636 | | B | IC | | IC5804 | 6-701-098-11 | IC THC63LVD83R-T | | |
| 637 | | B | IC | | IC7503 | 6-702-662-01 | IC PW166B-10T | | |
| 638 | | B | COIL | | L1001 | 1-412-030-11 | INDUCTOR 22UH | | |
| 639 | | B | COIL | | L3001 | 1-469-525-91 | INDUCTOR 10UH | | |
| 640 | | B | COIL | | L3004 | 1-469-525-91 | INDUCTOR 10UH | | |
| 641 | | B | COIL | | L3005 | 1-412-026-11 | INDUCTOR 1UH | | |
| 642 | | B | COIL | | L3006 | 1-412-026-11 | INDUCTOR 1UH | | |
| 643 | | B | COIL | | L3007 | 1-469-525-91 | INDUCTOR 10UH | | |
| 644 | | B | COIL | | L3008 | 1-469-525-91 | INDUCTOR 10UH | | |
| 645 | | B | COIL | | L3009 | 1-469-525-91 | INDUCTOR 10UH | | |
| 646 | | B | COIL | | L3010 | 1-412-029-11 | INDUCTOR 10UH | | |
| 647 | | B | COIL | | L3301 | 1-469-525-91 | INDUCTOR 10UH | | |
| 648 | | B | COIL | | L3302 | 1-469-528-91 | INDUCTOR 100UH | | |
| 649 | | B | COIL | | L3303 | 1-469-528-91 | INDUCTOR 100UH | | |
| 650 | | B | COIL | | L3600 | 1-469-525-91 | INDUCTOR 10UH | | |
| 651 | | B | COIL | | L3601 | 1-469-525-91 | INDUCTOR 10UH | | |
| 652 | | B | COIL | | L5801 | 1-419-774-21 | INDUCTOR 0UH | | |
| 653 | | B | COIL | | L5802 | 1-419-774-21 | INDUCTOR 0UH | | |
| 654 | | B | COIL | | L5803 | 1-419-774-21 | INDUCTOR 0UH | | |
| 655 | | B | COIL | | L5804 | 1-419-774-21 | INDUCTOR 0UH | | |
| 656 | | B | COIL | | L5805 | 1-419-774-21 | INDUCTOR 0UH | | |
| 657 | | B | TRANSISTOR | | Q1006 | 8-729-013-28 | TRANSISTOR HN1B01FU-TE85R | | |

| No. | # | Board | Type | Δ /* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|------------|-------------|----------|--------------|-----------------------------|-----------|-----------|
| 658 | | B | TRANSISTOR | | Q1007 | 8-729-907-00 | TRANSISTOR DTC114EU | | |
| 659 | | B | TRANSISTOR | | Q1008 | 8-729-907-00 | TRANSISTOR DTC114EU | | |
| 660 | | B | TRANSISTOR | | Q1009 | 8-729-025-28 | TRANSISTOR 2SK1828 | | |
| 661 | | B | TRANSISTOR | | Q1010 | 8-729-025-28 | TRANSISTOR 2SK1828 | | |
| 662 | | B | TRANSISTOR | | Q1015 | 8-729-907-00 | TRANSISTOR DTC114EU | | |
| 663 | | B | TRANSISTOR | | Q1016 | 8-729-907-00 | TRANSISTOR DTC114EU | | |
| 664 | | B | TRANSISTOR | | Q1017 | 8-729-025-28 | TRANSISTOR 2SK1828 | | |
| 665 | | B | TRANSISTOR | | Q1018 | 8-729-025-28 | TRANSISTOR 2SK1828 | | |
| 666 | | B | TRANSISTOR | | Q3004 | 8-729-117-73 | TRANSISTOR 2SC4178-F14 | | |
| 667 | | B | TRANSISTOR | | Q3005 | 8-729-117-73 | TRANSISTOR 2SC4178-F14 | | |
| 668 | | B | TRANSISTOR | | Q3006 | 8-729-117-73 | TRANSISTOR 2SC4178-F14 | | |
| 669 | | B | TRANSISTOR | | Q3007 | 8-729-122-63 | TRANSISTOR 2SA1226-E4 | | |
| 670 | | B | TRANSISTOR | | Q3008 | 8-729-122-63 | TRANSISTOR 2SA1226-E4 | | |
| 671 | | B | TRANSISTOR | | Q3009 | 8-729-122-63 | TRANSISTOR 2SA1226-E4 | | |
| 672 | | B | TRANSISTOR | | Q3011 | 6-550-585-01 | TRANSISTOR 2PC4081R-115 | | |
| 673 | | B | TRANSISTOR | | Q3012 | 8-729-117-73 | TRANSISTOR 2SC4178-F14 | | |
| 674 | | B | TRANSISTOR | | Q3013 | 8-729-117-73 | TRANSISTOR 2SC4178-F14 | | |
| 675 | | B | TRANSISTOR | | Q3015 | 8-729-010-25 | TRANSISTOR MSD601-RT1 | | |
| 676 | | B | TRANSISTOR | | Q3304 | 6-550-586-01 | TRANSISTOR 2PA1576R-115 | | |
| 677 | | B | TRANSISTOR | | Q3305 | 6-550-585-01 | TRANSISTOR 2PC4081R-115 | | |
| 678 | | B | TRANSISTOR | | Q3600 | 8-729-424-02 | TRANSISTOR 2SB709A-QRS-TX | | |
| 679 | | B | TRANSISTOR | | Q5801 | 6-550-014-01 | TRANSISTOR SSM6N15FU(TE85R) | | |
| 680 | | B | TRANSISTOR | | Q5802 | 8-729-028-86 | TRANSISTOR DTA143EUA-T106 | | |
| 681 | | B | TRANSISTOR | | Q5803 | 8-729-907-00 | TRANSISTOR DTC114EU | | |
| 682 | | B | TRANSISTOR | | Q5804 | 8-729-907-00 | TRANSISTOR DTC114EU | | |
| 683 | | B | TRANSISTOR | | Q5805 | 8-729-046-75 | TRANSISTOR SI2301DS-T1 | | |
| 684 | | B | RESISTOR | | R1005 | 1-218-990-11 | SHORT CHIP 0 | | |
| 685 | | B | RESISTOR | | R1006 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 686 | | B | RESISTOR | | R1007 | 1-218-990-11 | SHORT CHIP 0 | | |
| 687 | | B | RESISTOR | | R1008 | 1-218-990-11 | SHORT CHIP 0 | | |
| 688 | | B | RESISTOR | | R1009 | 1-218-990-11 | SHORT CHIP 0 | | |
| 689 | | B | RESISTOR | | R1010 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 690 | | B | RESISTOR | | R1011 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 691 | | B | RESISTOR | | R1012 | 1-218-973-11 | RES-CHIP 47K 5% 1/16W | | |
| 692 | | B | RESISTOR | | R1013 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 693 | | B | RESISTOR | | R1014 | 1-218-973-11 | RES-CHIP 47K 5% 1/16W | | |
| 694 | | B | RESISTOR | | R1015 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 695 | | B | RESISTOR | | R1016 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 696 | | B | RESISTOR | | R1017 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 697 | | B | RESISTOR | | R1018 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 698 | | B | RESISTOR | | R1020 | 1-216-864-11 | SHORT CHIP 0 | | |
| 699 | | B | RESISTOR | | R1022 | 1-216-864-11 | SHORT CHIP 0 | | |
| 700 | | B | RESISTOR | | R1026 | 1-216-864-11 | SHORT CHIP 0 | | |
| 701 | | B | RESISTOR | | R1027 | 1-216-864-11 | SHORT CHIP 0 | | |
| 702 | | B | RESISTOR | | R1028 | 1-216-864-11 | SHORT CHIP 0 | | |
| 703 | | B | RESISTOR | | R1029 | 1-218-990-11 | SHORT CHIP 0 | | |
| 704 | | B | RESISTOR | | R1031 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 705 | | B | RESISTOR | | R1032 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 706 | | B | RESISTOR | | R1034 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 707 | | B | RESISTOR | | R1036 | 1-216-864-11 | SHORT CHIP 0 | | |
| 708 | | B | RESISTOR | | R1037 | 1-216-864-11 | SHORT CHIP 0 | | |
| 709 | | B | RESISTOR | | R1048 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 710 | | B | RESISTOR | | R1049 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 711 | | B | RESISTOR | | R1055 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 712 | | B | RESISTOR | | R1058 | 1-220-183-81 | RES-CHIP 1.1K 5% 1/16W | | |
| 713 | | B | RESISTOR | | R1060 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 714 | | B | RESISTOR | | R1061 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 715 | | B | RESISTOR | | R1062 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 716 | | B | RESISTOR | | R1063 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 717 | | B | RESISTOR | | R1064 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 718 | | B | RESISTOR | | R1065 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 719 | | B | RESISTOR | | R1066 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 720 | | B | RESISTOR | | R1067 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 721 | | B | RESISTOR | | R1068 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 722 | | B | RESISTOR | | R1070 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 723 | | B | RESISTOR | | R1071 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 724 | | B | RESISTOR | | R1072 | 1-208-635-11 | RES-CHIP 10 0.5% 1/16W | | |
| 725 | | B | RESISTOR | | R1073 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 726 | | B | RESISTOR | | R1074 | 1-218-945-11 | RES-CHIP 220 5% 1/16W | | |
| 727 | | B | RESISTOR | | R1077 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 728 | | B | RESISTOR | | R1081 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 729 | | B | RESISTOR | | R1082 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 730 | | B | RESISTOR | | R1084 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |

| No. | # | Board | Type | Δ/μ | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|----------|--------------|----------|--------------|----------------------------|-----------|-----------|
| 731 | | B | RESISTOR | | R1085 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 732 | | B | RESISTOR | | R1086 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 733 | | B | RESISTOR | | R1087 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 734 | | B | RESISTOR | | R1088 | 1-218-959-11 | RES-CHIP 3.3K 5% 1/16W | | |
| 735 | | B | RESISTOR | | R1089 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 736 | | B | RESISTOR | | R1090 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 737 | | B | RESISTOR | | R1091 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 738 | | B | RESISTOR | | R1092 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 739 | | B | RESISTOR | | R1094 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 740 | | B | RESISTOR | | R1095 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 741 | | B | RESISTOR | | R1096 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 742 | | B | RESISTOR | | R1099 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 743 | | B | RESISTOR | | R1100 | 1-216-864-11 | SHORT CHIP 0 | | |
| 744 | | B | RESISTOR | | R1101 | 1-216-864-11 | SHORT CHIP 0 | | |
| 745 | | B | RESISTOR | | R1102 | 1-216-864-11 | SHORT CHIP 0 | | |
| 746 | | B | RESISTOR | | R1103 | 1-216-864-11 | SHORT CHIP 0 | | |
| 747 | | B | RESISTOR | | R1104 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 748 | | B | RESISTOR | | R1105 | 1-216-864-11 | SHORT CHIP 0 | | |
| 749 | | B | RESISTOR | | R1106 | 1-216-864-11 | SHORT CHIP 0 | | |
| 750 | | B | RESISTOR | | R1107 | 1-216-818-11 | METAL CHIP 560 5% 1/10W | | |
| 751 | | B | RESISTOR | | R1144 | 1-218-973-11 | RES-CHIP 47K 5% 1/16W | | |
| 752 | | B | RESISTOR | | R1145 | 1-218-973-11 | RES-CHIP 47K 5% 1/16W | | |
| 753 | | B | RESISTOR | | R1146 | 1-218-973-11 | RES-CHIP 47K 5% 1/16W | | |
| 754 | | B | RESISTOR | | R1147 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 755 | | B | RESISTOR | | R1148 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 756 | | B | RESISTOR | | R1157 | 1-218-959-11 | RES-CHIP 3.3K 5% 1/16W | | |
| 757 | | B | RESISTOR | | R1158 | 1-218-945-11 | RES-CHIP 220 5% 1/16W | | |
| 758 | | B | RESISTOR | | R1163 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 759 | | B | RESISTOR | | R1164 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 760 | | B | RESISTOR | | R1165 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 761 | | B | RESISTOR | | R1166 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 762 | | B | RESISTOR | | R1167 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 763 | | B | RESISTOR | | R1168 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 764 | | B | RESISTOR | | R1169 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 765 | | B | RESISTOR | | R1170 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 766 | | B | RESISTOR | | R1171 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 767 | | B | RESISTOR | | R1172 | 1-216-849-11 | METAL CHIP 220K 5% 1/10W | | |
| 768 | | B | RESISTOR | | R1173 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 769 | | B | RESISTOR | | R1175 | 1-216-864-11 | SHORT CHIP 0 | | |
| 770 | | B | RESISTOR | | R1177 | 1-216-864-11 | SHORT CHIP 0 | | |
| 771 | | B | RESISTOR | | R1202 | 1-218-724-11 | METAL CHIP 22K 0.5% 1/10W | | |
| 772 | | B | RESISTOR | | R1203 | 1-218-724-11 | METAL CHIP 22K 0.5% 1/10W | | |
| 773 | | B | RESISTOR | | R1204 | 1-218-865-11 | METAL CHIP 5.6K 0.5% 1/10W | | |
| 774 | | B | RESISTOR | | R3001 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 775 | | B | RESISTOR | | R3002 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 776 | | B | RESISTOR | | R3003 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 777 | | B | RESISTOR | | R3007 | 1-216-864-11 | SHORT CHIP 0 | | |
| 778 | | B | RESISTOR | | R3008 | 1-216-864-11 | SHORT CHIP 0 | | |
| 779 | | B | RESISTOR | | R3009 | 1-216-864-11 | SHORT CHIP 0 | | |
| 780 | | B | RESISTOR | | R3010 | 1-216-864-11 | SHORT CHIP 0 | | |
| 781 | | B | RESISTOR | | R3011 | 1-216-864-11 | SHORT CHIP 0 | | |
| 782 | | B | RESISTOR | | R3012 | 1-216-864-11 | SHORT CHIP 0 | | |
| 783 | | B | RESISTOR | | R3026 | 1-218-952-11 | RES-CHIP 820 5% 1/16W | | |
| 784 | | B | RESISTOR | | R3027 | 1-218-952-11 | RES-CHIP 820 5% 1/16W | | |
| 785 | | B | RESISTOR | | R3028 | 1-218-952-11 | RES-CHIP 820 5% 1/16W | | |
| 786 | | B | RESISTOR | | R3053 | 1-218-675-11 | METAL CHIP 200 0.5% 1/10W | | |
| 787 | | B | RESISTOR | | R3054 | 1-218-679-11 | METAL CHIP 300 0.5% 1/10W | | |
| 788 | | B | RESISTOR | | R3055 | 1-218-679-11 | METAL CHIP 300 0.5% 1/10W | | |
| 789 | | B | RESISTOR | | R3059 | 1-218-675-11 | METAL CHIP 200 0.5% 1/10W | | |
| 790 | | B | RESISTOR | | R3060 | 1-218-679-11 | METAL CHIP 300 0.5% 1/10W | | |
| 791 | | B | RESISTOR | | R3061 | 1-218-679-11 | METAL CHIP 300 0.5% 1/10W | | |
| 792 | | B | RESISTOR | | R3062 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 793 | | B | RESISTOR | | R3063 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 794 | | B | RESISTOR | | R3064 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 795 | | B | RESISTOR | | R3066 | 1-216-823-11 | METAL CHIP 1.5K 5% 1/10W | | |
| 796 | | B | RESISTOR | | R3067 | 1-216-823-11 | METAL CHIP 1.5K 5% 1/10W | | |
| 797 | | B | RESISTOR | | R3068 | 1-216-823-11 | METAL CHIP 1.5K 5% 1/10W | | |
| 798 | | B | RESISTOR | | R3070 | 1-216-864-11 | SHORT CHIP 0 | | |
| 799 | | B | RESISTOR | | R3074 | 1-216-864-11 | SHORT CHIP 0 | | |
| 800 | | B | RESISTOR | | R3075 | 1-216-864-11 | SHORT CHIP 0 | | |
| 801 | | B | RESISTOR | | R3083 | 1-216-864-11 | SHORT CHIP 0 | | |
| 802 | | B | RESISTOR | | R3084 | 1-218-684-11 | METAL CHIP 470 0.5% 1/10W | | |
| 803 | | B | RESISTOR | | R3085 | 1-218-684-11 | METAL CHIP 470 0.5% 1/10W | | |

| No. | # | Board | Type | Δ/μ | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|----------|--------------|----------|--------------|----------------------------|-----------|-----------|
| 804 | | B | RESISTOR | | R3086 | 1-218-684-11 | METAL CHIP 470 0.5% 1/10W | | |
| 805 | | B | RESISTOR | | R3088 | 1-216-864-11 | SHORT CHIP 0 | | |
| 806 | | B | RESISTOR | | R3090 | 1-218-684-11 | METAL CHIP 470 0.5% 1/10W | | |
| 807 | | B | RESISTOR | | R3091 | 1-218-712-11 | METAL CHIP 6.8K 0.5% 1/10W | | |
| 808 | | B | RESISTOR | | R3092 | 1-218-957-11 | RES-CHIP 2.2K 5% 1/16W | | |
| 809 | | B | RESISTOR | | R3093 | 1-218-684-11 | METAL CHIP 470 0.5% 1/10W | | |
| 810 | | B | RESISTOR | | R3094 | 1-218-708-11 | METAL CHIP 4.7K 0.5% 1/10W | | |
| 811 | | B | RESISTOR | | R3096 | 1-218-684-11 | METAL CHIP 470 0.5% 1/10W | | |
| 812 | | B | RESISTOR | | R3098 | 1-218-708-11 | METAL CHIP 4.7K 0.5% 1/10W | | |
| 813 | | B | RESISTOR | | R3099 | 1-218-652-11 | METAL CHIP 22 0.5% 1/10W | | |
| 814 | | B | RESISTOR | | R3100 | 1-218-708-11 | METAL CHIP 4.7K 0.5% 1/10W | | |
| 815 | | B | RESISTOR | | R3101 | 1-216-847-11 | METAL CHIP 150K 5% 1/10W | | |
| 816 | | B | RESISTOR | | R3104 | 1-218-668-11 | METAL CHIP 100 0.5% 1/10W | | |
| 817 | | B | RESISTOR | | R3106 | 1-218-688-11 | METAL CHIP 680 0.5% 1/10W | | |
| 818 | | B | RESISTOR | | R3107 | 1-218-668-11 | METAL CHIP 100 0.5% 1/10W | | |
| 819 | | B | RESISTOR | | R3109 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 820 | | B | RESISTOR | | R3111 | 1-216-864-11 | SHORT CHIP 0 | | |
| 821 | | B | RESISTOR | | R3112 | 1-218-688-11 | METAL CHIP 680 0.5% 1/10W | | |
| 822 | | B | RESISTOR | | R3113 | 1-216-801-11 | METAL CHIP 22 5% 1/10W | | |
| 823 | | B | RESISTOR | | R3115 | 1-216-801-11 | METAL CHIP 22 5% 1/10W | | |
| 824 | | B | RESISTOR | | R3116 | 1-216-801-11 | METAL CHIP 22 5% 1/10W | | |
| 825 | | B | RESISTOR | | R3120 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 826 | | B | RESISTOR | | R3121 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 827 | | B | RESISTOR | | R3122 | 1-218-692-11 | METAL CHIP 1K 0.5% 1/10W | | |
| 828 | | B | RESISTOR | | R3123 | 1-218-692-11 | METAL CHIP 1K 0.5% 1/10W | | |
| 829 | | B | RESISTOR | | R3124 | 1-218-693-11 | METAL CHIP 1.1K 0.5% 1/10W | | |
| 830 | | B | RESISTOR | | R3125 | 1-218-692-11 | METAL CHIP 1K 0.5% 1/10W | | |
| 831 | | B | RESISTOR | | R3126 | 1-216-864-11 | SHORT CHIP 0 | | |
| 832 | | B | RESISTOR | | R3127 | 1-218-708-11 | METAL CHIP 4.7K 0.5% 1/10W | | |
| 833 | | B | RESISTOR | | R3128 | 1-218-696-11 | METAL CHIP 1.5K 0.5% 1/10W | | |
| 834 | | B | RESISTOR | | R3129 | 1-216-864-11 | SHORT CHIP 0 | | |
| 835 | | B | RESISTOR | | R3131 | 1-218-720-11 | METAL CHIP 15K 0.5% 1/10W | | |
| 836 | | B | RESISTOR | | R3136 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 837 | | B | RESISTOR | | R3137 | 1-216-864-11 | SHORT CHIP 0 | | |
| 838 | | B | RESISTOR | | R3138 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 839 | | B | RESISTOR | | R3139 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 840 | | B | RESISTOR | | R3141 | 1-216-864-11 | SHORT CHIP 0 | | |
| 841 | | B | RESISTOR | | R3142 | 1-216-864-11 | SHORT CHIP 0 | | |
| 842 | | B | RESISTOR | | R3143 | 1-218-990-11 | SHORT CHIP 0 | | |
| 843 | | B | RESISTOR | | R3145 | 1-218-990-11 | SHORT CHIP 0 | | |
| 844 | | B | RESISTOR | | R3146 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 845 | | B | RESISTOR | | R3147 | 1-218-985-11 | RES-CHIP 470K 5% 1/16W | | |
| 846 | | B | RESISTOR | | R3150 | 1-218-990-11 | SHORT CHIP 0 | | |
| 847 | | B | RESISTOR | | R3151 | 1-218-937-11 | RES-CHIP 47 5% 1/16W | | |
| 848 | | B | RESISTOR | | R3152 | 1-218-937-11 | RES-CHIP 47 5% 1/16W | | |
| 849 | | B | RESISTOR | | R3155 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 850 | | B | RESISTOR | | R3157 | 1-218-937-11 | RES-CHIP 47 5% 1/16W | | |
| 851 | | B | RESISTOR | | R3158 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 852 | | B | RESISTOR | | R3162 | 1-218-937-11 | RES-CHIP 47 5% 1/16W | | |
| 853 | | B | RESISTOR | | R3163 | 1-218-937-11 | RES-CHIP 47 5% 1/16W | | |
| 854 | | B | RESISTOR | | R3165 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 855 | | B | RESISTOR | | R3167 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 856 | | B | RESISTOR | | R3168 | 1-218-990-11 | SHORT CHIP 0 | | |
| 857 | | B | RESISTOR | | R3169 | 1-218-990-11 | SHORT CHIP 0 | | |
| 858 | | B | RESISTOR | | R3170 | 1-218-990-11 | SHORT CHIP 0 | | |
| 859 | | B | RESISTOR | | R3301 | 1-218-937-11 | RES-CHIP 47 5% 1/16W | | |
| 860 | | B | RESISTOR | | R3302 | 1-218-937-11 | RES-CHIP 47 5% 1/16W | | |
| 861 | | B | RESISTOR | | R3308 | 1-218-937-11 | RES-CHIP 47 5% 1/16W | | |
| 862 | | B | RESISTOR | | R3309 | 1-218-945-11 | METAL CHIP 220 5% 1/16W | | |
| 863 | | B | RESISTOR | | R3310 | 1-218-945-11 | METAL CHIP 220 5% 1/16W | | |
| 864 | | B | RESISTOR | | R3311 | 1-208-695-11 | RES-CHIP 3.3K 0.5% 1/16W | | |
| 865 | | B | RESISTOR | | R3312 | 1-218-945-11 | METAL CHIP 220 5% 1/16W | | |
| 866 | | B | RESISTOR | | R3313 | 1-218-990-11 | SHORT CHIP 0 | | |
| 867 | | B | RESISTOR | | R3316 | 1-218-990-11 | SHORT CHIP 0 | | |
| 868 | | B | RESISTOR | | R3317 | 1-218-990-11 | SHORT CHIP 0 | | |
| 869 | | B | RESISTOR | | R3318 | 1-220-180-11 | METAL CHIP 620 5% 1/16W | | |
| 870 | | B | RESISTOR | | R3319 | 1-208-873-81 | METAL CHIP 270 0.5% 1/16W | | |
| 871 | | B | RESISTOR | | R3324 | 1-218-990-11 | SHORT CHIP 0 | | |
| 872 | | B | RESISTOR | | R3325 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 873 | | B | RESISTOR | | R3326 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 874 | | B | RESISTOR | | R3344 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 875 | | B | RESISTOR | | R3345 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 876 | | B | RESISTOR | | R3352 | 1-218-990-11 | SHORT CHIP 0 | | |

| No. | # | Board | Type | Δ/μ | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|-----|---|-------|----------|--------------|----------|--------------|--------------------------|-----------|-----------|
| 877 | | B | RESISTOR | | R3353 | 1-218-990-11 | SHORT CHIP 0 | | |
| 878 | | B | RESISTOR | | R3363 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 879 | | B | RESISTOR | | R3370 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 880 | | B | RESISTOR | | R3371 | 1-218-985-11 | RES-CHIP 470K 5% 1/16W | | |
| 881 | | B | RESISTOR | | R3372 | 1-218-969-11 | RES-CHIP 22K 5% 1/16W | | |
| 882 | | B | RESISTOR | | R3373 | 1-218-933-11 | RES-CHIP 22 5% 1/16W | | |
| 883 | | B | RESISTOR | | R3374 | 1-218-945-11 | RES-CHIP 220 5% 1/16W | | |
| 884 | | B | RESISTOR | | R3375 | 1-218-953-11 | RES-CHIP 1K 5% 1/16W | | |
| 885 | | B | RESISTOR | | R3376 | 1-218-947-11 | RES-CHIP 330 5% 1/16W | | |
| 886 | | B | RESISTOR | | R3377 | 1-218-945-11 | RES-CHIP 220 5% 1/16W | | |
| 887 | | B | RESISTOR | | R3378 | 1-218-959-11 | RES-CHIP 3.3K 5% 1/16W | | |
| 888 | | B | RESISTOR | | R3379 | 1-208-696-11 | RES-CHIP 3.6K 0.5% 1/16W | | |
| 889 | | B | RESISTOR | | R3380 | 1-218-990-11 | SHORT CHIP 0 | | |
| 890 | | B | RESISTOR | | R3381 | 1-218-985-11 | RES-CHIP 470K 5% 1/16W | | |
| 891 | | B | RESISTOR | | R3382 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 892 | | B | RESISTOR | | R3383 | 1-218-990-11 | SHORT CHIP 0 | | |
| 893 | | B | RESISTOR | | R3600 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 894 | | B | RESISTOR | | R3601 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 895 | | B | RESISTOR | | R3602 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 896 | | B | RESISTOR | | R3603 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 897 | | B | RESISTOR | | R3604 | 1-218-990-11 | SHORT CHIP 0 | | |
| 898 | | B | RESISTOR | | R3605 | 1-218-937-11 | RES-CHIP 47 5% 1/16W | | |
| 899 | | B | RESISTOR | | R3606 | 1-218-937-11 | RES-CHIP 47 5% 1/16W | | |
| 900 | | B | RESISTOR | | R3607 | 1-218-937-11 | RES-CHIP 47 5% 1/16W | | |
| 901 | | B | RESISTOR | | R3608 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 902 | | B | RESISTOR | | R3609 | 1-208-683-11 | RES-CHIP 1K 0.5% 1/16W | | |
| 903 | | B | RESISTOR | | R3610 | 1-208-697-11 | RES-CHIP 3.9K 0.5% 1/16W | | |
| 904 | | B | RESISTOR | | R3611 | 1-218-959-11 | RES-CHIP 3.3K 5% 1/16W | | |
| 905 | | B | RESISTOR | | R3612 | 1-218-989-11 | RES-CHIP 1M 5% 1/16W | | |
| 906 | | B | RESISTOR | | R3613 | 1-218-957-11 | RES-CHIP 2.2K 5% 1/16W | | |
| 907 | | B | RESISTOR | | R3614 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 908 | | B | RESISTOR | | R3615 | 1-218-956-11 | RES-CHIP 1.8K 5% 1/16W | | |
| 909 | | B | RESISTOR | | R3616 | 1-218-971-11 | RES-CHIP 33K 5% 1/16W | | |
| 910 | | B | RESISTOR | | R5002 | 1-216-859-11 | METAL CHIP 1.5M 5% 1/10W | | |
| 911 | | B | RESISTOR | | R5003 | 1-216-864-11 | SHORT CHIP 0 | | |
| 912 | | B | RESISTOR | | R5004 | 1-218-990-11 | SHORT CHIP 0 | | |
| 913 | | B | RESISTOR | | R5005 | 1-216-864-11 | SHORT CHIP 0 | | |
| 914 | | B | RESISTOR | | R5006 | 1-216-864-11 | SHORT CHIP 0 | | |
| 915 | | B | RESISTOR | | R5007 | 1-216-864-11 | SHORT CHIP 0 | | |
| 916 | | B | RESISTOR | | R5008 | 1-216-802-11 | METAL CHIP 27 5% 1/10W | | |
| 917 | | B | RESISTOR | | R5009 | 1-216-801-11 | METAL CHIP 22 5% 1/10W | | |
| 918 | | B | RESISTOR | | R5011 | 1-216-864-11 | SHORT CHIP 0 | | |
| 919 | | B | RESISTOR | | R5012 | 1-216-864-11 | SHORT CHIP 0 | | |
| 920 | | B | RESISTOR | | R5013 | 1-218-959-11 | RES-CHIP 3.3K 5% 1/16W | | |
| 921 | | B | RESISTOR | | R5016 | 1-218-959-11 | RES-CHIP 3.3K 5% 1/16W | | |
| 922 | | B | RESISTOR | | R5017 | 1-216-864-11 | SHORT CHIP 0 | | |
| 923 | | B | RESISTOR | | R5019 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 924 | | B | RESISTOR | | R5020 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 925 | | B | RESISTOR | | R5022 | 1-216-827-11 | METAL CHIP 3.3K 5% 1/10W | | |
| 926 | | B | RESISTOR | | R5027 | 1-216-864-11 | SHORT CHIP 0 | | |
| 927 | | B | RESISTOR | | R5028 | 1-216-864-11 | SHORT CHIP 0 | | |
| 928 | | B | RESISTOR | | R5029 | 1-216-864-11 | SHORT CHIP 0 | | |
| 929 | | B | RESISTOR | | R5030 | 1-216-864-11 | SHORT CHIP 0 | | |
| 930 | | B | RESISTOR | | R5031 | 1-216-864-11 | SHORT CHIP 0 | | |
| 931 | | B | RESISTOR | | R5032 | 1-216-864-11 | SHORT CHIP 0 | | |
| 932 | | B | RESISTOR | | R5033 | 1-218-990-11 | SHORT CHIP 0 | | |
| 933 | | B | RESISTOR | | R5034 | 1-216-864-11 | SHORT CHIP 0 | | |
| 934 | | B | RESISTOR | | R5035 | 1-218-990-11 | SHORT CHIP 0 | | |
| 935 | | B | RESISTOR | | R5036 | 1-218-990-11 | SHORT CHIP 0 | | |
| 936 | | B | RESISTOR | | R5037 | 1-218-990-11 | SHORT CHIP 0 | | |
| 937 | | B | RESISTOR | | R5038 | 1-218-990-11 | SHORT CHIP 0 | | |
| 938 | | B | RESISTOR | | R5042 | 1-218-990-11 | SHORT CHIP 0 | | |
| 939 | | B | RESISTOR | | R5043 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 940 | | B | RESISTOR | | R5044 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 941 | | B | RESISTOR | | R5045 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 942 | | B | RESISTOR | | R5047 | 1-216-827-11 | METAL CHIP 3.3K 5% 1/10W | | |
| 943 | | B | RESISTOR | | R5049 | 1-216-801-11 | METAL CHIP 22 5% 1/10W | | |
| 944 | | B | RESISTOR | | R5050 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 945 | | B | RESISTOR | | R5052 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 946 | | B | RESISTOR | | R5053 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 947 | | B | RESISTOR | | R5054 | 1-216-827-11 | METAL CHIP 3.3K 5% 1/10W | | |
| 948 | | B | RESISTOR | | R5056 | 1-216-864-11 | SHORT CHIP 0 | | |
| 949 | | B | RESISTOR | | R5059 | 1-216-864-11 | SHORT CHIP 0 | | |

| No. | # | Board | Type | Δ/μ | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|----------|--------------|----------|--------------|---------------------------|-----------|-----------|
| 950 | | B | RESISTOR | | R5060 | 1-216-864-11 | SHORT CHIP 0 | | |
| 951 | | B | RESISTOR | | R5063 | 1-216-864-11 | SHORT CHIP 0 | | |
| 952 | | B | RESISTOR | | R5064 | 1-218-990-11 | SHORT CHIP 0 | | |
| 953 | | B | RESISTOR | | R5065 | 1-218-990-11 | SHORT CHIP 0 | | |
| 954 | | B | RESISTOR | | R5066 | 1-218-990-11 | SHORT CHIP 0 | | |
| 955 | | B | RESISTOR | | R5067 | 1-218-990-11 | SHORT CHIP 0 | | |
| 956 | | B | RESISTOR | | R5068 | 1-216-801-11 | METAL CHIP 22 5% 1/10W | | |
| 957 | | B | RESISTOR | | R5069 | 1-216-864-11 | SHORT CHIP 0 | | |
| 958 | | B | RESISTOR | | R5070 | 1-218-990-11 | SHORT CHIP 0 | | |
| 959 | | B | RESISTOR | | R5071 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 960 | | B | RESISTOR | | R5072 | 1-216-827-11 | METAL CHIP 3.3K 5% 1/10W | | |
| 961 | | B | RESISTOR | | R5073 | 1-216-827-11 | METAL CHIP 3.3K 5% 1/10W | | |
| 962 | | B | RESISTOR | | R5074 | 1-216-803-11 | METAL CHIP 33 5% 1/10W | | |
| 963 | | B | RESISTOR | | R5075 | 1-216-864-11 | SHORT CHIP 0 | | |
| 964 | | B | RESISTOR | | R5078 | 1-216-839-11 | METAL CHIP 33K 5% 1/10W | | |
| 965 | | B | RESISTOR | | R5079 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 966 | | B | RESISTOR | | R5081 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 967 | | B | RESISTOR | | R5085 | 1-216-864-11 | SHORT CHIP 0 | | |
| 968 | | B | RESISTOR | | R5089 | 1-216-864-11 | SHORT CHIP 0 | | |
| 969 | | B | RESISTOR | | R5090 | 1-216-839-11 | METAL CHIP 33K 5% 1/10W | | |
| 970 | | B | RESISTOR | | R5093 | 1-216-864-11 | SHORT CHIP 0 | | |
| 971 | | B | RESISTOR | | R5096 | 1-216-864-11 | SHORT CHIP 0 | | |
| 972 | | B | RESISTOR | | R5097 | 1-216-864-11 | SHORT CHIP 0 | | |
| 973 | | B | RESISTOR | | R5098 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 974 | | B | RESISTOR | | R5099 | 1-216-864-11 | SHORT CHIP 0 | | |
| 975 | | B | RESISTOR | | R5101 | 1-218-959-11 | RES-CHIP 3.3K 5% 1/16W | | |
| 976 | | B | RESISTOR | | R5102 | 1-218-864-11 | RES-CHIP 5.1K 0.5% 1/10W | | |
| 977 | | B | RESISTOR | | R5103 | 1-208-683-11 | RES-CHIP 1K 0.5% 1/16W | | |
| 978 | | B | RESISTOR | | R5104 | 1-208-898-81 | METAL CHIP 3K 0.5% 1/16W | | |
| 979 | | B | RESISTOR | | R5105 | 1-208-683-11 | RES-CHIP 1K 0.5% 1/16W | | |
| 980 | | B | RESISTOR | | R5106 | 1-216-801-11 | METAL CHIP 22 5% 1/10W | | |
| 981 | | B | RESISTOR | | R5107 | 1-216-864-11 | SHORT CHIP 0 | | |
| 982 | | B | RESISTOR | | R5108 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 983 | | B | RESISTOR | | R5109 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 984 | | B | RESISTOR | | R5110 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 985 | | B | RESISTOR | | R5111 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 986 | | B | RESISTOR | | R5112 | 1-216-864-11 | SHORT CHIP 0 | | |
| 987 | | B | RESISTOR | | R5113 | 1-216-864-11 | SHORT CHIP 0 | | |
| 988 | | B | RESISTOR | | R5114 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 989 | | B | RESISTOR | | R5115 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 990 | | B | RESISTOR | | R5116 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 991 | | B | RESISTOR | | R5117 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 992 | | B | RESISTOR | | R5118 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 993 | | B | RESISTOR | | R5127 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 994 | | B | RESISTOR | | R5128 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 995 | | B | RESISTOR | | R5129 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 996 | | B | RESISTOR | | R5801 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 997 | | B | RESISTOR | | R5803 | 1-218-961-11 | RES-CHIP 4.7K 5% 1/16W | | |
| 998 | | B | RESISTOR | | R5805 | 1-216-864-11 | SHORT CHIP 0 | | |
| 999 | | B | RESISTOR | | R5806 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1000 | | B | RESISTOR | | R5808 | 1-218-941-81 | RES-CHIP 100 5% 1/16W | | |
| 1001 | | B | RESISTOR | | R5809 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 1002 | | B | RESISTOR | | R5810 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1003 | | B | RESISTOR | | R5811 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 1004 | | B | RESISTOR | | R5812 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1005 | | B | RESISTOR | | R5813 | 1-218-965-11 | RES-CHIP 10K 5% 1/16W | | |
| 1006 | | B | RESISTOR | | R5814 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1007 | | B | RESISTOR | | R5815 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1008 | | B | RESISTOR | | R5817 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1009 | | B | RESISTOR | | R5818 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1010 | | B | RESISTOR | | R5819 | 1-218-937-11 | RES-CHIP 47 5% 1/16W | | |
| 1011 | | B | RESISTOR | | R5820 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1012 | | B | RESISTOR | | R5823 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1013 | | B | RESISTOR | | R5824 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1014 | | B | RESISTOR | | R5836 | 1-218-990-11 | SHORT CHIP 0 | | |
| 1015 | | B | RESISTOR | | R5838 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1016 | | B | RESISTOR | | R5849 | 1-216-812-11 | METAL CHIP 180 5% 1/10W | | |
| 1017 | | B | NETWORK | | RB1001 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1018 | | B | NETWORK | | RB1002 | 1-234-378-21 | RES, NETWORK 10KX4 (1005) | | |
| 1019 | | B | NETWORK | | RB1005 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1020 | | B | NETWORK | | RB1006 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1021 | | B | NETWORK | | RB1009 | 1-234-380-21 | RES, NETWORK 47KX4 (1005) | | |
| 1022 | | B | NETWORK | | RB1011 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |

| No. | # | Board | Type | Δ /* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|---------|-------------|----------|--------------|---------------------------|-----------|-----------|
| 1023 | | B | NETWORK | | RB1012 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1024 | | B | NETWORK | | RB1013 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1025 | | B | NETWORK | | RB1014 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1026 | | B | NETWORK | | RB1015 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1027 | | B | NETWORK | | RB1016 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1028 | | B | NETWORK | | RB1017 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1029 | | B | NETWORK | | RB1019 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1030 | | B | NETWORK | | RB1021 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1031 | | B | NETWORK | | RB1023 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1032 | | B | NETWORK | | RB1024 | 1-239-674-81 | RESISTOR, NETWORK 100 | | |
| 1033 | | B | NETWORK | | RB1025 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1034 | | B | NETWORK | | RB1026 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1035 | | B | NETWORK | | RB1027 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1036 | | B | NETWORK | | RB1028 | 1-239-674-81 | RESISTOR, NETWORK 100 | | |
| 1037 | | B | NETWORK | | RB1029 | 1-239-674-81 | RESISTOR, NETWORK 100 | | |
| 1038 | | B | NETWORK | | RB1030 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1039 | | B | NETWORK | | RB1031 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1040 | | B | NETWORK | | RB1032 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1041 | | B | NETWORK | | RB1033 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1042 | | B | NETWORK | | RB3001 | 1-234-378-21 | RES, NETWORK 10KX4 (1005) | | |
| 1043 | | B | NETWORK | | RB3002 | 1-234-378-21 | RES, NETWORK 10KX4 (1005) | | |
| 1044 | | B | NETWORK | | RB3003 | 1-234-378-21 | RES, NETWORK 10KX4 (1005) | | |
| 1045 | | B | NETWORK | | RB3004 | 1-234-378-21 | RES, NETWORK 10KX4 (1005) | | |
| 1046 | | B | NETWORK | | RB3005 | 1-234-378-21 | RES, NETWORK 10KX4 (1005) | | |
| 1047 | | B | NETWORK | | RB3006 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1048 | | B | NETWORK | | RB3007 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1049 | | B | NETWORK | | RB3008 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1050 | | B | NETWORK | | RB3009 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1051 | | B | NETWORK | | RB3010 | 1-234-378-21 | RES, NETWORK 10KX4 (1005) | | |
| 1052 | | B | NETWORK | | RB3011 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1053 | | B | NETWORK | | RB3012 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1054 | | B | NETWORK | | RB3013 | 1-234-378-21 | RES, NETWORK 10KX4 (1005) | | |
| 1055 | | B | NETWORK | | RB3014 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1056 | | B | NETWORK | | RB3015 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1057 | | B | NETWORK | | RB3016 | 1-234-378-21 | RES, NETWORK 10KX4 (1005) | | |
| 1058 | | B | NETWORK | | RB3017 | 1-234-378-21 | RES, NETWORK 10KX4 (1005) | | |
| 1059 | | B | NETWORK | | RB3018 | 1-234-378-21 | RES, NETWORK 10KX4 (1005) | | |
| 1060 | | B | NETWORK | | RB3019 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1061 | | B | NETWORK | | RB3020 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1062 | | B | NETWORK | | RB3021 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1063 | | B | NETWORK | | RB3022 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1064 | | B | NETWORK | | RB3027 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1065 | | B | NETWORK | | RB3301 | 1-234-371-21 | RES, NETWORK 47X4 (1005) | | |
| 1066 | | B | NETWORK | | RB3302 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1067 | | B | NETWORK | | RB3303 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1068 | | B | NETWORK | | RB3304 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1069 | | B | NETWORK | | RB3305 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1070 | | B | NETWORK | | RB3306 | 1-234-371-21 | RES, NETWORK 47X4 (1005) | | |
| 1071 | | B | NETWORK | | RB3307 | 1-234-371-21 | RES, NETWORK 47X4 (1005) | | |
| 1072 | | B | NETWORK | | RB3308 | 1-234-371-21 | RES, NETWORK 47X4 (1005) | | |
| 1073 | | B | NETWORK | | RB3309 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1074 | | B | NETWORK | | RB3310 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1075 | | B | NETWORK | | RB3311 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1076 | | B | NETWORK | | RB3312 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1077 | | B | NETWORK | | RB3313 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1078 | | B | NETWORK | | RB3314 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1079 | | B | NETWORK | | RB3600 | 1-234-371-21 | RES, NETWORK 47X4 (1005) | | |
| 1080 | | B | NETWORK | | RB5001 | 1-234-371-21 | RES, NETWORK 47X4 (1005) | | |
| 1081 | | B | NETWORK | | RB5002 | 1-234-371-21 | RES, NETWORK 47X4 (1005) | | |
| 1082 | | B | NETWORK | | RB5003 | 1-234-371-21 | RES, NETWORK 47X4 (1005) | | |
| 1083 | | B | NETWORK | | RB5004 | 1-234-371-21 | RES, NETWORK 47X4 (1005) | | |
| 1084 | | B | NETWORK | | RB5005 | 1-234-371-21 | RES, NETWORK 47X4 (1005) | | |
| 1085 | | B | NETWORK | | RB5006 | 1-234-371-21 | RES, NETWORK 47X4 (1005) | | |
| 1086 | | B | NETWORK | | RB5013 | 1-234-371-21 | RES, NETWORK 47X4 (1005) | | |
| 1087 | | B | NETWORK | | RB5014 | 1-234-371-21 | RES, NETWORK 47X4 (1005) | | |
| 1088 | | B | NETWORK | | RB5015 | 1-234-371-21 | RES, NETWORK 47X4 (1005) | | |
| 1089 | | B | NETWORK | | RB5016 | 1-234-371-21 | RES, NETWORK 47X4 (1005) | | |
| 1090 | | B | NETWORK | | RB5017 | 1-234-371-21 | RES, NETWORK 47X4 (1005) | | |
| 1091 | | B | NETWORK | | RB5018 | 1-234-371-21 | RES, NETWORK 47X4 (1005) | | |
| 1092 | | B | NETWORK | | RB5019 | 1-234-400-21 | CONDUCTOR, NETWORK (2010) | | |
| 1093 | | B | NETWORK | | RB5020 | 1-234-400-21 | CONDUCTOR, NETWORK (2010) | | |
| 1094 | | B | NETWORK | | RB5021 | 1-234-400-21 | CONDUCTOR, NETWORK (2010) | | |
| 1095 | | B | NETWORK | | RB5022 | 1-234-400-21 | CONDUCTOR, NETWORK (2010) | | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|------------|-----|----------|--------------|---------------------------------|-----------|-----------|
| 1096 | | B | NETWORK | | RB5023 | 1-234-371-21 | RES, NETWORK 47X4 (1005) | | |
| 1097 | | B | NETWORK | | RB5024 | 1-234-371-21 | RES, NETWORK 47X4 (1005) | | |
| 1098 | | B | NETWORK | | RB5025 | 1-234-371-21 | RES, NETWORK 47X4 (1005) | | |
| 1099 | | B | NETWORK | | RB5026 | 1-234-371-21 | RES, NETWORK 47X4 (1005) | | |
| 1100 | | B | NETWORK | | RB5027 | 1-239-674-81 | RESISTOR, NETWORK 100 | | |
| 1101 | | B | NETWORK | | RB5028 | 1-234-370-21 | RES, NETWORK 22X4 (1005) | | |
| 1102 | | B | NETWORK | | RB5029 | 1-234-370-21 | RES, NETWORK 22X4 (1005) | | |
| 1103 | | B | NETWORK | | RB5030 | 1-234-370-21 | RES, NETWORK 22X4 (1005) | | |
| 1104 | | B | NETWORK | | RB5031 | 1-234-370-21 | RES, NETWORK 22X4 (1005) | | |
| 1105 | | B | NETWORK | | RB5032 | 1-239-674-81 | RESISTOR, NETWORK 100 | | |
| 1106 | | B | NETWORK | | RB5801 | 1-234-371-21 | RES, NETWORK 47X4 (1005) | | |
| 1107 | | B | NETWORK | | RB5802 | 1-234-371-21 | RES, NETWORK 47X4 (1005) | | |
| 1108 | | B | NETWORK | | RB5803 | 1-234-371-21 | RES, NETWORK 47X4 (1005) | | |
| 1109 | | B | NETWORK | | RB5804 | 1-234-371-21 | RES, NETWORK 47X4 (1005) | | |
| 1110 | | B | NETWORK | | RB5805 | 1-234-371-21 | RES, NETWORK 47X4 (1005) | | |
| 1111 | | B | NETWORK | | RB5806 | 1-234-371-21 | RES, NETWORK 47X4 (1005) | | |
| 1112 | | B | NETWORK | | RB5807 | 1-234-370-21 | RES, NETWORK 22X4 (1005) | | |
| 1113 | | B | NETWORK | | RB5820 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1114 | | B | NETWORK | | RB5821 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1115 | | B | NETWORK | | RB5822 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1116 | | B | NETWORK | | RB5823 | 1-234-372-21 | RES, NETWORK 100X4 (1005) | | |
| 1117 | | B | CRYSTAL | | X1001 | 1-795-650-21 | VIBRATOR, CRYSTAL | | |
| 1118 | | B | CRYSTAL | | X3002 | 1-795-951-21 | QUARTZ CRYSTAL OSCILLATOR(SMD) | | |
| 1119 | | B | CRYSTAL | | X3600 | 1-795-244-11 | VIBRATOR, CERAMIC | | |
| 1120 | | B | CRYSTAL | | X5001 | 1-767-655-21 | VIBRATOR, CRYSTAL | | |
| 1121 | | B | CRYSTAL | | X5801 | 1-795-416-21 | VIBRATOR, CRYSTAL | | |
| 1122 | | B | CRYSTAL | | X5802 | 1-795-850-21 | OSCILLATOR, CRYSTAL | | |
| 1123 | | G | LED HOLDER | * | A6000 | 4-042-408-01 | PIN, COATING LEAD | | |
| 1124 | | G | CAPACITOR | | C6000 | 1-161-964-91 | CERAMIC 0.0047UF 250V | | |
| 1125 | | G | CAPACITOR | | C6001 | 1-161-964-91 | CERAMIC 0.0047UF 250V | | |
| 1126 | | G | CAPACITOR | | C6002 | 1-100-529-41 | ELECT(BLOCK) 220UF 20% 250V | | |
| 1127 | | G | CAPACITOR | | C6003 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 1128 | | G | CAPACITOR | | C6004 | 1-126-398-11 | ELECT CHIP 4.7UF 20.00% 35V | | |
| 1129 | | G | CAPACITOR | | C6005 | 1-107-888-11 | ELECT 47UF 20.00% 25V | | |
| 1130 | | G | CAPACITOR | | C6006 | 1-130-017-00 | FILM 820PF 5.00% 50V | | |
| 1131 | | G | CAPACITOR | | C6007 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1132 | | G | CAPACITOR | | C6008 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 1133 | | G | CAPACITOR | | C6010 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1134 | | G | CAPACITOR | | C6011 | 1-136-165-00 | FILM 0.1UF 5.00% 50V | | |
| 1135 | | G | CAPACITOR | | C6012 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 1136 | | G | CAPACITOR | | C6013 | 1-100-613-81 | CERAMIC 470PF 5% 1KV | | |
| 1137 | | G | CAPACITOR | | C6014 | 1-100-613-81 | CERAMIC 470PF 5% 1KV | | |
| 1138 | | G | CAPACITOR | | C6015 | 1-165-610-11 | FILM 33000PF 3% 800V | | |
| 1139 | | G | CAPACITOR | | C6016 | 1-165-610-11 | FILM 33000PF 3% 800V | | |
| 1140 | | G | CAPACITOR | | C6019 | 1-119-895-51 | CERAMIC 4700PF 20.00% 250V | | |
| 1141 | | G | CAPACITOR | | C6020 | 1-104-706-11 | MYLAR 0.22UF 20.00% 250V | | |
| 1142 | | G | CAPACITOR | | C6021 | 1-104-706-11 | MYLAR 0.22UF 20.00% 250V | | |
| 1143 | | G | CAPACITOR | | C6022 | 1-119-895-51 | CERAMIC 4700PF 20.00% 250V | | |
| 1144 | | G | CAPACITOR | | C6025 | 1-162-960-11 | CERAMIC CHIP 220PF 10.00% 50V | | |
| 1145 | | G | CAPACITOR | | C6027 | 1-136-203-11 | MYLAR 0.01UF 5.00% 630V | | |
| 1146 | | G | CAPACITOR | | C6029 | 1-126-398-11 | ELECT CHIP 4.7UF 20.00% 35V | | |
| 1147 | | G | CAPACITOR | | C6032 | 1-100-529-41 | ELECT(BLOCK) 220UF 20% 250V | | |
| 1148 | | G | CAPACITOR | | C6033 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1149 | | G | CAPACITOR | | C6034 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1150 | | G | CAPACITOR | | C6300 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1151 | | G | CAPACITOR | | C6301 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1152 | | G | CAPACITOR | | C6302 | 1-126-392-11 | ELECT CHIP 100UF 20.00% 6.3V | | |
| 1153 | | G | CAPACITOR | | C6308 | 1-131-872-91 | CERAMIC CHIP 1000PF 10% 630V | | |
| 1154 | | G | CAPACITOR | | C6309 | 1-128-361-11 | ELECT CHIP 470UF 20.00% 10V | | |
| 1155 | | G | CAPACITOR | | C6313 | 1-126-401-21 | ELECT CHIP 1UF 20.00% 50V | | |
| 1156 | | G | CAPACITOR | | C6314 | 1-100-632-21 | ELECT CHIP 33UF 20% 8V | | |
| 1157 | | G | CAPACITOR | | C6316 | 1-128-405-11 | ELECT CHIP 22UF 20% 50V | | |
| 1158 | | G | CAPACITOR | | C6317 | 1-131-976-61 | ELECT 820UF 20% 25V | | |
| 1159 | | G | CAPACITOR | | C6318 | 1-100-791-21 | ELECT CHIP 56UF 20% 25V | | |
| 1160 | | G | CAPACITOR | | C6319 | 1-131-976-61 | ELECT 820UF 20% 25V | | |
| 1161 | | G | CAPACITOR | | C6320 | 1-100-309-21 | ELECT CHIP 22UF 20% 25V | | |
| 1162 | | G | CAPACITOR | | C6321 | 1-136-201-61 | MYLAR 0.22UF 10.00% 400V | | |
| 1163 | | G | CAPACITOR | | C6322 | 1-165-585-21 | ELECT CHIP 47UF 20% 25V | | |
| 1164 | | G | CAPACITOR | | C6331 | 1-100-632-21 | ELECT CHIP 33UF 20% 8V | | |
| 1165 | | G | CONNECTOR | | CN6001 | 1-695-915-11 | TAB (CONTACT) | | |
| 1166 | | G | CONNECTOR | * | CN6002 | 1-691-961-11 | PIN, CONNECTOR (PC BOARD) 3P | | |
| 1167 | | G | CONNECTOR | * | CN6302 | 1-564-507-11 | PLUG, CONNECTOR 4P | | |
| 1168 | | G | CONNECTOR | * | CN6350 | 1-564-507-11 | PLUG, CONNECTOR 4P | | |

| No. | # | Board | Type | Δ /* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|---------------|-------------|----------|--------------|------------------------------|-----------|-----------|
| 1169 | | G | CONNECTOR | * | CN6351 | 1-564-595-11 | PLUG, CONNECTOR 14P | | |
| 1170 | | G | CONNECTOR | * | CN6352 | 1-564-509-11 | PLUG, CONNECTOR 6P | | |
| 1171 | | G | DIODE | | D6000 | 8-719-510-53 | DIODE D4SB60L | | |
| 1172 | | G | DIODE | | D6003 | 8-719-979-64 | DIODE UF4005PKG23 | | |
| 1173 | | G | DIODE | | D6004 | 8-719-083-83 | DIODE UDZS-TE17-15B | | |
| 1174 | | G | DIODE | | D6005 | 8-719-083-83 | DIODE UDZS-TE17-15B | | |
| 1175 | | G | DIODE | | D6007 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 1176 | | G | DIODE | | D6008 | 8-719-080-69 | DIODE M1FS4-4063 | | |
| 1177 | | G | DIODE | | D6009 | 8-719-948-45 | DIODE ERA22-08 | | |
| 1178 | | G | DIODE | | D6012 | 8-719-080-75 | DIODE M1FL20U-4063 | | |
| 1179 | | G | DIODE | | D6301 | 8-719-054-36 | DIODE FCH10A06 | | |
| 1180 | | G | DIODE | | D6302 | 8-719-054-36 | DIODE FCH10A06 | | |
| 1181 | | G | DIODE | | D6303 | 8-719-054-36 | DIODE FCH10A06 | | |
| 1182 | | G | DIODE | | D6304 | 8-719-054-36 | DIODE FCH10A06 | | |
| 1183 | | G | DIODE | | D6305 | 8-719-510-12 | DIODE D10SC4M | | |
| 1184 | | G | DIODE | | D6306 | 8-719-080-75 | DIODE M1FL20U-4063 | | |
| 1185 | | G | DIODE | | D6307 | 8-719-510-12 | DIODE D10SC4M | | |
| 1186 | | G | DIODE | | D6350 | 8-719-510-12 | DIODE D10SC4M | | |
| 1187 | | G | DIODE | | D6351 | 8-719-510-12 | DIODE D10SC4M | | |
| 1188 | | G | DIODE | | D6352 | 8-719-054-36 | DIODE FCH10A06 | | |
| 1189 | | G | DIODE | | D6353 | 8-719-054-36 | DIODE FCH10A06 | | |
| 1190 | | G | DIODE | | D6354 | 8-719-054-36 | DIODE FCH10A06 | | |
| 1191 | | G | DIODE | | D6355 | 8-719-054-36 | DIODE FCH10A06 | | |
| 1192 | | G | DIODE | | D6356 | 8-719-054-36 | DIODE FCH10A06 | | |
| 1193 | | G | DIODE | | D6357 | 8-719-080-75 | DIODE M1FL20U-4063 | | |
| 1194 | | G | DIODE | | D6358 | 8-719-054-36 | DIODE FCH10A06 | | |
| 1195 | | G | DIODE | | D6360 | 8-719-080-75 | DIODE M1FL20U-4063 | | |
| 1196 | | G | FUSE | Δ | F6000 | 1-576-230-12 | FUSE 3.15A 250V | | |
| 1197 | | G | FERRITE BEAD | | FB6000 | 1-410-397-21 | FERRITE 1.1UH | | |
| 1198 | | G | FUSE HOLDER | | FH6000 | 1-533-223-11 | FUSE HOLDER 0A 0V | | |
| 1199 | | G | FUSE HOLDER | | FH6001 | 1-533-223-11 | FUSE HOLDER 0A 0V | | |
| 1200 | | G | IC | | IC6000 | 6-705-768-01 | IC MCZ3001UB | | |
| 1201 | | G | IC | | IC6001 | 6-600-102-01 | IC STR-A6459 | | |
| 1202 | | G | IC | | IC6002 | 8-759-540-60 | IC TL431BCLPRA | | |
| 1203 | | G | IC | | IC6300 | 8-759-540-60 | IC TL431BCLPRA | | |
| 1204 | | G | IC | | IC6302 | 8-759-533-85 | IC L88M05T-FA-TL | | |
| 1205 | | G | COIL | | L6000 | 1-456-444-11 | LINE FILTER COIL | | |
| 1206 | | G | COIL | | L6003 | 1-456-444-11 | LINE FILTER COIL | | |
| 1207 | | G | COIL | | L6351 | 1-469-848-21 | INDUCTOR 10UH | | |
| 1208 | | G | COIL | | L6352 | 1-412-537-31 | INDUCTOR 100UH | | |
| 1209 | | G | PHOTO COUPLER | | PH6000 | 8-749-016-81 | PHOTO COUPLER PC123Y22 | | |
| 1210 | | G | PHOTO COUPLER | | PH6002 | 8-749-016-81 | PHOTO COUPLER PC123Y22 | | |
| 1211 | | G | TRANSISTOR | | Q6000 | 6-550-666-01 | TRANSISTOR 2SK3555-01MR-F104 | | |
| 1212 | | G | TRANSISTOR | | Q6001 | 6-550-666-01 | TRANSISTOR 2SK3555-01MR-F104 | | |
| 1213 | | G | TRANSISTOR | | Q6002 | 8-729-026-49 | TRANSISTOR 2SA1037AK-T146-R | | |
| 1214 | | G | TRANSISTOR | | Q6003 | 8-729-422-33 | TRANSISTOR 2SD601A-Q-TX | | |
| 1215 | | G | TRANSISTOR | | Q6004 | 8-729-120-28 | TRANSISTOR 2SC1623-L5L6 | | |
| 1216 | | G | TRANSISTOR | | Q6005 | 8-729-026-49 | TRANSISTOR 2SA1037AK-T146-R | | |
| 1217 | | G | TRANSISTOR | | Q6300 | 8-729-422-33 | TRANSISTOR 2SD601A-Q-TX | | |
| 1218 | | G | RESISTOR | | R6001 | 1-202-933-61 | FUSIBLE 0.1 10% 1/2W | | |
| 1219 | | G | RESISTOR | | R6002 | 1-218-878-11 | METAL CHIP 20K 0.5% 1/10W | | |
| 1220 | | G | RESISTOR | | R6003 | 1-218-823-11 | METAL CHIP 100 0.5% 1/10W | | |
| 1221 | | G | RESISTOR | | R6004 | 1-218-873-11 | METAL CHIP 12K 0.5% 1/10W | | |
| 1222 | | G | RESISTOR | | R6006 | 1-220-319-91 | RES-CHIP 330K 5% 1/4W | | |
| 1223 | | G | RESISTOR | | R6007 | 1-220-319-91 | RES-CHIP 330K 5% 1/4W | | |
| 1224 | | G | RESISTOR | | R6008 | 1-220-319-91 | RES-CHIP 330K 5% 1/4W | | |
| 1225 | | G | RESISTOR | | R6009 | 1-216-835-11 | METAL CHIP 15K 5% 1/10W | | |
| 1226 | | G | RESISTOR | | R6010 | 1-211-992-11 | METAL CHIP 91 0.5% 1/10W | | |
| 1227 | | G | RESISTOR | | R6011 | 1-245-511-11 | CEMENTED 3.3 5% 5W | | |
| 1228 | | G | RESISTOR | | R6012 | 1-249-393-11 | CARBON 10 5% 1/4W | | |
| 1229 | | G | RESISTOR | | R6013 | 1-249-393-11 | CARBON 10 5% 1/4W | | |
| 1230 | | G | RESISTOR | | R6014 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1231 | | G | RESISTOR | | R6015 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1232 | | G | RESISTOR | | R6016 | 1-243-660-71 | METAL 0.05 5% 2W | | |
| 1233 | | G | RESISTOR | | R6017 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 1234 | | G | RESISTOR | | R6018 | 1-245-511-11 | CEMENTED 3.3 5% 5W | | |
| 1235 | | G | RESISTOR | | R6019 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1236 | | G | RESISTOR | | R6020 | 1-219-512-11 | METAL 2.2M 5% 1/2W | | |
| 1237 | | G | RESISTOR | | R6021 | 1-249-381-11 | CARBON 1 5% 1/4W | | |
| 1238 | | G | RESISTOR | | R6022 | 1-220-330-91 | RES-CHIP 68K 5% 1/2W | | |
| 1239 | | G | RESISTOR | | R6023 | 1-220-330-91 | RES-CHIP 68K 5% 1/2W | | |
| 1240 | | G | RESISTOR | | R6024 | 1-245-511-11 | CEMENTED 3.3 5% 5W | | |
| 1241 | | G | RESISTOR | | R6025 | 1-220-330-91 | RES-CHIP 68K 5% 1/2W | | |

| No. | # | Board | Type | Δ/μ | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|-------------|--------------|----------|--------------|----------------------------------|-----------|-----------|
| 1242 | | G | RESISTOR | | R6027 | 1-218-262-11 | RES-CHIP 2.7 10% 1/2W | | |
| 1243 | | G | RESISTOR | | R6028 | 1-218-262-11 | RES-CHIP 2.7 10% 1/2W | | |
| 1244 | | G | RESISTOR | | R6029 | 1-216-822-11 | METAL CHIP 1.2K 5% 1/10W | | |
| 1245 | | G | RESISTOR | | R6030 | 1-260-127-11 | CARBON 220K 5% 1/2W | | |
| 1246 | | G | RESISTOR | | R6033 | 1-249-393-11 | CARBON 10 5% 1/4W | | |
| 1247 | | G | RESISTOR | | R6036 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 1248 | | G | RESISTOR | | R6037 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1249 | | G | RESISTOR | | R6038 | 1-219-513-11 | METAL 4.7M 5% 1/2W | | |
| 1250 | | G | RESISTOR | | R6039 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1251 | | G | RESISTOR | | R6040 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1252 | | G | RESISTOR | | R6041 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | | |
| 1253 | | G | RESISTOR | | R6042 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | | |
| 1254 | | G | RESISTOR | | R6043 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1255 | | G | RESISTOR | | R6044 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1256 | | G | RESISTOR | | R6045 | 1-218-883-11 | METAL CHIP 33K 0.5% 1/10W | | |
| 1257 | | G | RESISTOR | | R6046 | 1-218-865-11 | METAL CHIP 5.6K 0.5% 1/10W | | |
| 1258 | | G | RESISTOR | | R6047 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1259 | | G | RESISTOR | | R6048 | 1-216-827-11 | METAL CHIP 3.3K 5% 1/10W | | |
| 1260 | | G | RESISTOR | | R6300 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 1261 | | G | RESISTOR | | R6301 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1262 | | G | RESISTOR | | R6302 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1263 | | G | RESISTOR | | R6304 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1264 | | G | RESISTOR | | R6305 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1265 | | G | RESISTOR | | R6306 | 1-218-866-11 | METAL CHIP 6.2K 0.5% 1/10W | | |
| 1266 | | G | RESISTOR | | R6307 | 1-218-848-11 | METAL CHIP 1.1K 0.5% 1/10W | | |
| 1267 | | G | RESISTOR | | R6316 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1268 | | G | RESISTOR | | R6319 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1269 | | G | RESISTOR | | R6320 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1270 | | G | RESISTOR | | R6321 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1271 | | G | RESISTOR | | R6322 | 1-249-377-11 | CARBON 0.47 5% 1/4W | | |
| 1272 | | G | RESISTOR | | R6325 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | | |
| 1273 | | G | TRANSFORMER | | T6000 | 1-443-135-11 | CONVERTER TRANSFORMER (PIT) | | |
| 1274 | | G | TRANSFORMER | | T6001 | 1-433-844-11 | TRANSFORMER, CONVERTER | | |
| 1275 | | G | TRANSFORMER | | T6002 | 1-443-136-11 | CONVERTER TRANSFORMER (PIT) | | |
| 1276 | | G | VARIATOR | | VD6000 | 1-801-265-51 | VARIATOR TNR10V271K660 | | |
| 1277 | | TU | CAPACITOR | | C6400 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1278 | | TU | CAPACITOR | | C6401 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 1279 | | TU | CAPACITOR | | C6402 | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 1280 | | TU | CAPACITOR | | C6403 | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 1281 | | TU | CAPACITOR | | C6404 | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V | | |
| 1282 | | TU | CAPACITOR | | C6405 | 1-127-692-11 | CERAMIC CHIP 10UF 10% 16V | | |
| 1283 | | TU | CAPACITOR | | C6406 | 1-127-692-11 | CERAMIC CHIP 10UF 10% 16V | | |
| 1284 | | TU | CAPACITOR | | C6407 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1285 | | TU | CAPACITOR | | C6408 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1286 | | TU | CAPACITOR | | C6409 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1287 | | TU | CAPACITOR | | C6410 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1288 | | TU | CAPACITOR | | C6411 | 1-127-692-11 | CERAMIC CHIP 10UF 10% 16V | | |
| 1289 | | TU | CAPACITOR | | C6412 | 1-127-692-11 | CERAMIC CHIP 10UF 10% 16V | | |
| 1290 | | TU | CAPACITOR | | C6413 | 1-127-692-11 | CERAMIC CHIP 10UF 10% 16V | | |
| 1291 | | TU | CAPACITOR | | C6414 | 1-127-692-11 | CERAMIC CHIP 10UF 10% 16V | | |
| 1292 | | TU | CAPACITOR | | C6415 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1293 | | TU | CAPACITOR | | C6416 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1294 | | TU | CAPACITOR | | C6417 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 1295 | | TU | CAPACITOR | | C6418 | 1-165-176-11 | CERAMIC CHIP 0.047UF 10.00% 16V | | |
| 1296 | | TU | CONNECTOR | | CN6401 | 1-766-719-41 | CONNECTOR, BOARD TO BOARD 10P | | |
| 1297 | | TU | CONNECTOR | | CN6403 | 1-766-719-41 | CONNECTOR, BOARD TO BOARD 10P | | |
| 1298 | | TU | DIODE | | D6401 | 8-719-070-63 | DIODE PDZ10B-115 | | |
| 1299 | | TU | IC | | IC6401 | 6-703-225-01 | IC S-80928CNMC-G8YT2G | | |
| 1300 | | TU | TRANSISTOR | | Q6401 | 6-550-585-01 | TRANSISTOR 2PC4081R-115 | | |
| 1301 | | TU | TRANSISTOR | | Q6402 | 6-550-585-01 | TRANSISTOR 2PC4081R-115 | | |
| 1302 | | TU | TRANSISTOR | | Q6403 | 6-550-585-01 | TRANSISTOR 2PC4081R-115 | | |
| 1303 | | TU | TRANSISTOR | | Q6404 | 6-550-585-01 | TRANSISTOR 2PC4081R-115 | | |
| 1304 | | TU | TRANSISTOR | | Q6405 | 6-550-549-01 | TRANSISTOR DTC114EUAFT106 | | |
| 1305 | | TU | TRANSISTOR | | Q6406 | 6-550-586-01 | TRANSISTOR 2PA1576R-115 | | |
| 1306 | | TU | TRANSISTOR | | Q6407 | 6-550-585-01 | TRANSISTOR 2PC4081R-115 | | |
| 1307 | | TU | TRANSISTOR | | Q6408 | 6-550-586-01 | TRANSISTOR 2PA1576R-115 | | |
| 1308 | | TU | TRANSISTOR | | Q6457 | 6-550-549-01 | TRANSISTOR DTC114EUAFT106 | | |
| 1309 | | TU | RESISTOR | | R6400 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1310 | | TU | RESISTOR | | R6401 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1311 | | TU | RESISTOR | | R6402 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1312 | | TU | RESISTOR | | R6403 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1313 | | TU | RESISTOR | | R6404 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1314 | | TU | RESISTOR | | R6405 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |

| No. | # | Board | Type | Δ /* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|------------|-------------|----------|--------------|----------------------------------|-----------|-----------|
| 1315 | | TU | RESISTOR | | R6409 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1316 | | TU | RESISTOR | | R6410 | 1-216-839-11 | METAL CHIP 33K 5% 1/10W | | |
| 1317 | | TU | RESISTOR | | R6412 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1318 | | TU | RESISTOR | | R6413 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | | |
| 1319 | | TU | RESISTOR | | R6414 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1320 | | TU | RESISTOR | | R6415 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1321 | | TU | RESISTOR | | R6416 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1322 | | TU | RESISTOR | | R6417 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1323 | | TU | RESISTOR | | R6418 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1324 | | TU | RESISTOR | | R6420 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1325 | | TU | RESISTOR | | R6421 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1326 | | TU | RESISTOR | | R6423 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1327 | | TU | RESISTOR | | R6424 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1328 | | TU | RESISTOR | | R6425 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 1329 | | TU | RESISTOR | | R6426 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 1330 | | TU | RESISTOR | | R6427 | 1-216-836-11 | METAL CHIP 18K 5% 1/10W | | |
| 1331 | | TU | RESISTOR | | R6428 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1332 | | TU | RESISTOR | | R6430 | 1-216-826-11 | METAL CHIP 2.7K 5% 1/10W | | |
| 1333 | | TU | RESISTOR | | R6431 | 1-216-839-11 | METAL CHIP 33K 5% 1/10W | | |
| 1334 | | TU | RESISTOR | | R6432 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 1335 | | TU | RESISTOR | | R6433 | 1-216-828-11 | METAL CHIP 3.9K 5% 1/10W | | |
| 1336 | | TU | RESISTOR | | R6434 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 1337 | | TU | RESISTOR | | R6435 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1338 | | TU | RESISTOR | | R6437 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1339 | | TU | RESISTOR | | R6438 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1340 | | TU | RESISTOR | | R6466 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 1341 | | TU | RESISTOR | | R6468 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 1342 | | TU | TUNER | | TU6400 | 8-598-593-20 | TUNER, FSS BTF-WA421 | | |
| 1343 | | A | LED HOLDER | * | A2001 | 4-042-408-01 | PIN, COATING LEAD | | |
| 1344 | | A | LED HOLDER | * | A2002 | 4-042-408-01 | PIN, COATING LEAD | | |
| 1345 | | A | LED HOLDER | * | A2003 | 4-042-408-01 | PIN, COATING LEAD | | |
| 1346 | | A | CAPACITOR | | C2514 | 1-109-982-11 | CERAMIC CHIP 1UF 10.00% 10V | | |
| 1347 | | A | CAPACITOR | | C2515 | 1-100-159-91 | CERAMIC CHIP 22UF 10% 6.3V | | |
| 1348 | | A | CAPACITOR | | C2516 | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V | | |
| 1349 | | A | CAPACITOR | | C2517 | 1-100-159-91 | CERAMIC CHIP 22UF 10% 6.3V | | |
| 1350 | | A | CAPACITOR | | C2518 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 1351 | | A | CAPACITOR | | C2519 | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V | | |
| 1352 | | A | CAPACITOR | | C2520 | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V | | |
| 1353 | | A | CAPACITOR | | C2521 | 1-131-661-21 | ELECT CHIP 100UF 20% 10V | | |
| 1354 | | A | CAPACITOR | | C2522 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1355 | | A | CAPACITOR | | C2523 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1356 | | A | CAPACITOR | | C2524 | 1-131-661-21 | ELECT CHIP 100UF 20% 10V | | |
| 1357 | | A | CAPACITOR | | C2532 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1358 | | A | CAPACITOR | | C2533 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 1359 | | A | CAPACITOR | | C2540 | 1-125-837-91 | CERAMIC CHIP 1UF 10% 6.3V | | |
| 1360 | | A | CAPACITOR | | C2542 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1361 | | A | CAPACITOR | | C2545 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1362 | | A | CAPACITOR | | C2555 | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V | | |
| 1363 | | A | CAPACITOR | | C2560 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 1364 | | A | CAPACITOR | | C2563 | 1-164-360-11 | CERAMIC CHIP 0.1UF 16V | | |
| 1365 | | A | CAPACITOR | | C2580 | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V | | |
| 1366 | | A | CAPACITOR | | C2581 | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V | | |
| 1367 | | A | CAPACITOR | | C2582 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 1368 | | A | CAPACITOR | | C2584 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1369 | | A | CAPACITOR | | C2585 | 1-128-416-11 | ELECT CHIP 100UF 20.00% 16V | | |
| 1370 | | A | CAPACITOR | | C2587 | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V | | |
| 1371 | | A | CAPACITOR | | C2588 | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V | | |
| 1372 | | A | CAPACITOR | | C2589 | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V | | |
| 1373 | | A | CAPACITOR | | C2590 | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V | | |
| 1374 | | A | CAPACITOR | | C2632 | 1-127-692-11 | CERAMIC CHIP 10UF 10% 16V | | |
| 1375 | | A | CAPACITOR | | C2633 | 1-127-692-11 | CERAMIC CHIP 10UF 10% 16V | | |
| 1376 | | A | CAPACITOR | | C2634 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1377 | | A | CAPACITOR | | C2635 | 1-127-692-11 | CERAMIC CHIP 10UF 10% 16V | | |
| 1378 | | A | CAPACITOR | | C2636 | 1-127-692-11 | CERAMIC CHIP 10UF 10% 16V | | |
| 1379 | | A | CAPACITOR | | C2637 | 1-127-692-11 | CERAMIC CHIP 10UF 10% 16V | | |
| 1380 | | A | CAPACITOR | | C2638 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1381 | | A | CAPACITOR | | C2655 | 1-164-315-11 | CERAMIC CHIP 470PF 5.00% 50V | | |
| 1382 | | A | CAPACITOR | | C2803 | 1-165-112-11 | CERAMIC CHIP 0.33UF 16V | | |
| 1383 | | A | CAPACITOR | | C2804 | 1-165-112-11 | CERAMIC CHIP 0.33UF 16V | | |
| 1384 | | A | CAPACITOR | | C2807 | 1-164-346-11 | CERAMIC CHIP 1UF 16V | | |
| 1385 | | A | CAPACITOR | | C2808 | 1-164-346-11 | CERAMIC CHIP 1UF 16V | | |
| 1386 | | A | CAPACITOR | | C2809 | 1-135-346-21 | ELECT CHIP 39UF 20% 16V | | |
| 1387 | | A | CAPACITOR | | C2810 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |

| No. | # | Board | Type | Δ /* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|-----------|-------------|----------|--------------|----------------------------------|-----------|-----------|
| 1388 | | A | CAPACITOR | | C2814 | 1-115-566-11 | CERAMIC CHIP 4.7UF 10.00% 10V | | |
| 1389 | | A | CAPACITOR | | C2816 | 1-115-566-11 | CERAMIC CHIP 4.7UF 10.00% 10V | | |
| 1390 | | A | CAPACITOR | | C2817 | 1-165-875-11 | CERAMIC CHIP 10UF 10% 10V | | |
| 1391 | | A | CAPACITOR | | C2818 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1392 | | A | CAPACITOR | | C2819 | 1-165-875-11 | CERAMIC CHIP 10UF 10% 10V | | |
| 1393 | | A | CAPACITOR | | C2820 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1394 | | A | CAPACITOR | | C2822 | 1-165-112-11 | CERAMIC CHIP 0.33UF 16V | | |
| 1395 | | A | CAPACITOR | | C2823 | 1-165-112-11 | CERAMIC CHIP 0.33UF 16V | | |
| 1396 | | A | CAPACITOR | | C4601 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1397 | | A | CAPACITOR | | C4602 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1398 | | A | CAPACITOR | | C4603 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1399 | | A | CAPACITOR | | C4604 | 1-162-923-11 | CERAMIC CHIP 47PF 5.00% 50V | | |
| 1400 | | A | CAPACITOR | | C4605 | 1-164-227-11 | CERAMIC CHIP 0.022UF 10.00% 25V | | |
| 1401 | | A | CAPACITOR | | C4606 | 1-164-004-11 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 1402 | | A | CAPACITOR | | C4607 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1403 | | A | CAPACITOR | | C4608 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1404 | | A | CAPACITOR | | C4609 | 1-164-245-11 | CERAMIC CHIP 0.015UF 10.00% 25V | | |
| 1405 | | A | CAPACITOR | | C4610 | 1-162-969-11 | CERAMIC CHIP 0.0068UF 10.00% 25V | | |
| 1406 | | A | CAPACITOR | | C4612 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | | |
| 1407 | | A | CAPACITOR | | C4613 | 1-127-760-11 | CERAMIC CHIP 4.7UF 10% 6.3V | | |
| 1408 | | A | CAPACITOR | | C4614 | 1-164-004-11 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 1409 | | A | CAPACITOR | | C4615 | 1-164-004-11 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 1410 | | A | CAPACITOR | | C4616 | 1-127-760-11 | CERAMIC CHIP 4.7UF 10% 6.3V | | |
| 1411 | | A | CAPACITOR | | C4617 | 1-127-760-11 | CERAMIC CHIP 4.7UF 10% 6.3V | | |
| 1412 | | A | CAPACITOR | | C4618 | 1-127-738-91 | CERAMIC CHIP 4.7UF 10% 25V | | |
| 1413 | | A | CAPACITOR | | C4619 | 1-137-894-21 | ELECT CHIP 470UF 20% 25V | | |
| 1414 | | A | CAPACITOR | | C4620 | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V | | |
| 1415 | | A | CAPACITOR | | C4621 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 1416 | | A | CAPACITOR | | C4622 | 1-128-536-11 | ELECT CHIP 100UF 20.00% 25V | | |
| 1417 | | A | CAPACITOR | | C4623 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1418 | | A | CAPACITOR | | C4624 | 1-164-004-11 | CERAMIC CHIP 0.1UF 10.00% 25V | | |
| 1419 | | A | CAPACITOR | | C4625 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1420 | | A | CAPACITOR | | C4626 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1421 | | A | CAPACITOR | | C4627 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 1422 | | A | CAPACITOR | | C4628 | 1-128-360-11 | ELECT CHIP 220UF 20.00% 10V | | |
| 1423 | | A | CAPACITOR | | C4629 | 1-135-960-91 | CERAMIC CHIP 10UF 10% 25V | | |
| 1424 | | A | CAPACITOR | | C4630 | 1-135-960-91 | CERAMIC CHIP 10UF 10% 25V | | |
| 1425 | | A | CAPACITOR | | C4631 | 1-135-346-21 | ELECT CHIP 39UF 20% 16V | | |
| 1426 | | A | CAPACITOR | | C4632 | 1-135-346-21 | ELECT CHIP 39UF 20% 16V | | |
| 1427 | | A | CAPACITOR | | C4633 | 1-137-894-21 | ELECT CHIP 470UF 20% 25V | | |
| 1428 | | A | CAPACITOR | | C4634 | 1-137-894-21 | ELECT CHIP 470UF 20% 25V | | |
| 1429 | | A | CAPACITOR | | C4635 | 1-127-760-11 | CERAMIC CHIP 4.7UF 10% 6.3V | | |
| 1430 | | A | CAPACITOR | | C4636 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1431 | | A | CAPACITOR | | C4637 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1432 | | A | CAPACITOR | | C4640 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1433 | | A | CAPACITOR | | C4641 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1434 | | A | CAPACITOR | | C4642 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1435 | | A | CAPACITOR | | C4646 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 1436 | | A | CAPACITOR | | C6449 | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V | | |
| 1437 | | A | CAPACITOR | | C6450 | 1-126-404-11 | ELECT CHIP 4.7UF 20.00% 50V | | |
| 1438 | | A | CAPACITOR | | C6451 | 1-126-404-11 | ELECT CHIP 4.7UF 20.00% 50V | | |
| 1439 | | A | CAPACITOR | | C6452 | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V | | |
| 1440 | | A | CAPACITOR | | C6453 | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V | | |
| 1441 | | A | CAPACITOR | | C6454 | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V | | |
| 1442 | | A | CAPACITOR | | C6455 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 1443 | | A | CAPACITOR | | C6456 | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V | | |
| 1444 | | A | CAPACITOR | | C6458 | 1-131-661-21 | ELECT CHIP 100UF 20% 10V | | |
| 1445 | | A | CAPACITOR | | C6459 | 1-162-995-11 | CERAMIC CHIP 0.022UF 50V | | |
| 1446 | | A | CAPACITOR | | C6460 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1447 | | A | CAPACITOR | | C6461 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 1448 | | A | CAPACITOR | | C6462 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 1449 | | A | CAPACITOR | | C6464 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 1450 | | A | CAPACITOR | | C6701 | 1-115-459-11 | ELECT CHIP 47UF 20.00% 6.3V | | |
| 1451 | | A | CAPACITOR | | C6702 | 1-126-391-11 | ELECT CHIP 47UF 20.00% 6.3V | | |
| 1452 | | A | CAPACITOR | | C6703 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1453 | | A | CAPACITOR | | C6704 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 1454 | | A | CAPACITOR | | C6705 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 1455 | | A | CAPACITOR | | C6706 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1456 | | A | CAPACITOR | | C6707 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1457 | | A | CAPACITOR | | C6708 | 1-115-416-11 | CERAMIC CHIP 0.001UF 5.00% 25V | | |
| 1458 | | A | CAPACITOR | | C7001 | 1-125-889-91 | CERAMIC CHIP 2.2UF 10% 10V | | |
| 1459 | | A | CAPACITOR | | C7002 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 1460 | | A | CAPACITOR | | C7003 | 1-107-890-11 | ELECT 2200UF 20.00% 25V | | |

| No. | # | Board | Type | Δ /* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|-----------|-------------|----------|--------------|----------------------------------|-----------|-----------|
| 1461 | | A | CAPACITOR | | C7004 | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V | | |
| 1462 | | A | CAPACITOR | | C7005 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1463 | | A | CAPACITOR | | C7006 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 1464 | | A | CAPACITOR | | C7008 | 1-137-894-21 | ELECT CHIP 470UF 20% 25V | | |
| 1465 | | A | CAPACITOR | | C7009 | 1-125-889-91 | CERAMIC CHIP 2.2UF 10% 10V | | |
| 1466 | | A | CAPACITOR | | C7010 | 1-125-889-91 | CERAMIC CHIP 2.2UF 10% 10V | | |
| 1467 | | A | CAPACITOR | | C7011 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 1468 | | A | CAPACITOR | | C7012 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 1469 | | A | CAPACITOR | | C7013 | 1-125-889-91 | CERAMIC CHIP 2.2UF 10% 10V | | |
| 1470 | | A | CAPACITOR | | C7014 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 1471 | | A | CAPACITOR | | C7015 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 1472 | | A | CAPACITOR | | C7016 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1473 | | A | CAPACITOR | | C7018 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 1474 | | A | CAPACITOR | | C7019 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 1475 | | A | CAPACITOR | | C7020 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 1476 | | A | CAPACITOR | | C7021 | 1-162-967-11 | CERAMIC CHIP 0.0033UF 10.00% 50V | | |
| 1477 | | A | CAPACITOR | | C7023 | 1-125-889-91 | CERAMIC CHIP 2.2UF 10% 10V | | |
| 1478 | | A | CAPACITOR | | C7024 | 1-164-344-11 | CERAMIC CHIP 0.068UF 10.00% 25V | | |
| 1479 | | A | CAPACITOR | | C7025 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 1480 | | A | CAPACITOR | | C7026 | 1-162-967-11 | CERAMIC CHIP 0.0033UF 10.00% 50V | | |
| 1481 | | A | CAPACITOR | | C7027 | 1-165-176-61 | CERAMIC CHIP 0.047UF 10.00% 16V | | |
| 1482 | | A | CAPACITOR | | C7028 | 1-165-176-61 | CERAMIC CHIP 0.047UF 10.00% 16V | | |
| 1483 | | A | CAPACITOR | | C7029 | 1-165-176-61 | CERAMIC CHIP 0.047UF 10.00% 16V | | |
| 1484 | | A | CAPACITOR | | C7030 | 1-164-230-11 | CERAMIC CHIP 220PF 5.00% 50V | | |
| 1485 | | A | CAPACITOR | | C7031 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1486 | | A | CAPACITOR | | C7032 | 1-165-176-61 | CERAMIC CHIP 0.047UF 10.00% 16V | | |
| 1487 | | A | CAPACITOR | | C7033 | 1-125-889-91 | CERAMIC CHIP 2.2UF 10% 10V | | |
| 1488 | | A | CAPACITOR | | C7036 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 1489 | | A | CAPACITOR | | C7038 | 1-164-230-11 | CERAMIC CHIP 220PF 5.00% 50V | | |
| 1490 | | A | CAPACITOR | | C7039 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1491 | | A | CAPACITOR | | C7040 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1492 | | A | CAPACITOR | | C7041 | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V | | |
| 1493 | | A | CAPACITOR | | C7042 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1494 | | A | CAPACITOR | | C7043 | 1-107-890-11 | ELECT 2200UF 20.00% 25V | | |
| 1495 | | A | CAPACITOR | | C7044 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 1496 | | A | CAPACITOR | | C7045 | 1-164-344-11 | CERAMIC CHIP 0.068UF 10.00% 25V | | |
| 1497 | | A | CAPACITOR | | C7046 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 1498 | | A | CAPACITOR | | C7047 | 1-162-967-11 | CERAMIC CHIP 0.0033UF 10.00% 50V | | |
| 1499 | | A | CAPACITOR | | C7048 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 1500 | | A | CAPACITOR | | C7049 | 1-162-967-11 | CERAMIC CHIP 0.0033UF 10.00% 50V | | |
| 1501 | | A | CAPACITOR | | C7051 | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V | | |
| 1502 | | A | CAPACITOR | | C7053 | 1-126-401-21 | ELECT CHIP 1UF 20.00% 50V | | |
| 1503 | | A | CAPACITOR | | C7054 | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V | | |
| 1504 | | A | CAPACITOR | | C7055 | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V | | |
| 1505 | | A | CAPACITOR | | C7056 | 1-107-914-11 | ELECT 1000UF 20.00% 50V | | |
| 1506 | | A | CAPACITOR | | C7057 | 1-107-914-11 | ELECT 1000UF 20.00% 50V | | |
| 1507 | | A | CAPACITOR | | C7058 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1508 | | A | CAPACITOR | | C7059 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1509 | | A | CAPACITOR | | C7060 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1510 | | A | CAPACITOR | | C7061 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1511 | | A | CAPACITOR | | C7062 | 1-125-889-91 | CERAMIC CHIP 2.2UF 10% 10V | | |
| 1512 | | A | CAPACITOR | | C7063 | 1-125-889-91 | CERAMIC CHIP 2.2UF 10% 10V | | |
| 1513 | | A | CAPACITOR | | C7064 | 1-125-889-91 | CERAMIC CHIP 2.2UF 10% 10V | | |
| 1514 | | A | CAPACITOR | | C7065 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1515 | | A | CAPACITOR | | C7066 | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V | | |
| 1516 | | A | CAPACITOR | | C7067 | 1-165-176-11 | CERAMIC CHIP 0.047UF 10.00% 16V | | |
| 1517 | | A | CAPACITOR | | C7068 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1518 | | A | CAPACITOR | | C7069 | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V | | |
| 1519 | | A | CAPACITOR | | C7070 | 1-127-692-11 | CERAMIC CHIP 10UF 10% 16V | | |
| 1520 | | A | CAPACITOR | | C7071 | 1-128-526-11 | ELECT 100UF 20.00% 25V | | |
| 1521 | | A | CAPACITOR | | C7072 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1522 | | A | CAPACITOR | | C7073 | 1-127-692-11 | CERAMIC CHIP 10UF 10% 16V | | |
| 1523 | | A | CAPACITOR | | C7074 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1524 | | A | CAPACITOR | | C7075 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 1525 | | A | CAPACITOR | | C7078 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1526 | | A | CAPACITOR | | C7079 | 1-110-501-11 | CERAMIC CHIP 0.33UF 10.00% 16V | | |
| 1527 | | A | CAPACITOR | | C7080 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1528 | | A | CAPACITOR | | C7081 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 1529 | | A | CAPACITOR | | C7082 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1530 | | A | CAPACITOR | | C7083 | 1-162-960-11 | CERAMIC CHIP 220PF 10.00% 50V | | |
| 1531 | | A | CAPACITOR | | C7084 | 1-126-394-11 | ELECT CHIP 10UF 20.00% 16V | | |
| 1532 | | A | CAPACITOR | | C7086 | 1-126-397-11 | ELECT CHIP 33UF 20.00% 25V | | |
| 1533 | | A | CAPACITOR | | C7087 | 1-107-823-11 | CERAMIC CHIP 0.47UF 10.00% 16V | | |

| No. | # | Board | Type | Δ /* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|-----------|-------------|----------|--------------|---------------------------------|-----------|-----------|
| 1534 | | A | CAPACITOR | | C7088 | 1-110-501-11 | CERAMIC CHIP 0.33UF 10.00% 16V | | |
| 1535 | | A | CAPACITOR | | C7089 | 1-128-526-11 | ELECT 100UF 20.00% 25V | | |
| 1536 | | A | CAPACITOR | | C7090 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1537 | | A | CAPACITOR | | C7091 | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V | | |
| 1538 | | A | CAPACITOR | | C7092 | 1-125-889-91 | CERAMIC CHIP 2.2UF 10% 10V | | |
| 1539 | | A | CAPACITOR | | C7093 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1540 | | A | CAPACITOR | | C7094 | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V | | |
| 1541 | | A | CAPACITOR | | C7096 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1542 | | A | CAPACITOR | | C7097 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1543 | | A | CAPACITOR | | C7098 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 1544 | | A | CAPACITOR | | C7099 | 1-107-890-11 | ELECT 2200UF 20.00% 25V | | |
| 1545 | | A | CAPACITOR | | C7100 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1546 | | A | CAPACITOR | | C7101 | 1-126-396-11 | ELECT CHIP 47UF 20.00% 16V | | |
| 1547 | | A | CAPACITOR | | C7102 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1548 | | A | CAPACITOR | | C7103 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1549 | | A | CAPACITOR | | C7104 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1550 | | A | CAPACITOR | | C7105 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1551 | | A | CAPACITOR | | C7106 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1552 | | A | CAPACITOR | | C7107 | 1-165-629-91 | CERAMIC CHIP 1UF 10% 50V | | |
| 1553 | | A | CAPACITOR | | C7108 | 1-127-692-11 | CERAMIC CHIP 10UF 10% 16V | | |
| 1554 | | A | CAPACITOR | | C7109 | 1-164-677-11 | CERAMIC CHIP 0.033UF 10.00% 16V | | |
| 1555 | | A | CAPACITOR | | C7110 | 1-125-889-91 | CERAMIC CHIP 2.2UF 10% 10V | | |
| 1556 | | A | CAPACITOR | | C7111 | 1-164-344-11 | CERAMIC CHIP 0.068UF 10.00% 25V | | |
| 1557 | | A | CAPACITOR | | C7112 | 1-164-344-11 | CERAMIC CHIP 0.068UF 10.00% 25V | | |
| 1558 | | A | CAPACITOR | | C7113 | 1-128-528-11 | ELECT 470UF 20.00% 25V | | |
| 1559 | | A | CAPACITOR | | C7400 | 1-126-405-11 | ELECT CHIP 10UF 20.00% 50V | | |
| 1560 | | A | CAPACITOR | | C7401 | 1-126-405-11 | ELECT CHIP 10UF 20.00% 50V | | |
| 1561 | | A | CAPACITOR | | C7402 | 1-126-404-11 | ELECT CHIP 4.7UF 20.00% 50V | | |
| 1562 | | A | CAPACITOR | | C7403 | 1-126-405-11 | ELECT CHIP 10UF 20.00% 50V | | |
| 1563 | | A | CAPACITOR | | C7404 | 1-126-404-11 | ELECT CHIP 4.7UF 20.00% 50V | | |
| 1564 | | A | CAPACITOR | | C7405 | 1-126-405-11 | ELECT CHIP 10UF 20.00% 50V | | |
| 1565 | | A | CAPACITOR | | C9002 | 1-115-566-11 | CERAMIC CHIP 4.7UF 10.00% 10V | | |
| 1566 | | A | CAPACITOR | | C9003 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1567 | | A | CAPACITOR | | C9004 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1568 | | A | CAPACITOR | | C9005 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1569 | | A | CAPACITOR | | C9010 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1570 | | A | CAPACITOR | | C9011 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1571 | | A | CAPACITOR | | C9012 | 1-115-566-11 | CERAMIC CHIP 4.7UF 10.00% 10V | | |
| 1572 | | A | CAPACITOR | | C9018 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1573 | | A | CAPACITOR | | C9019 | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V | | |
| 1574 | | A | CAPACITOR | | C9020 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 1575 | | A | CAPACITOR | | C9021 | 1-115-566-11 | CERAMIC CHIP 4.7UF 10.00% 10V | | |
| 1576 | | A | CAPACITOR | | C9022 | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V | | |
| 1577 | | A | CAPACITOR | | C9030 | 1-115-566-11 | CERAMIC CHIP 4.7UF 10.00% 10V | | |
| 1578 | | A | CAPACITOR | | C9031 | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V | | |
| 1579 | | A | CONNECTOR | | CN2801 | 1-774-769-11 | CONNECTOR, FFC/FPC 25P | | |
| 1580 | | A | CONNECTOR | | CN2802 | 1-774-769-11 | CONNECTOR, FFC/FPC 25P | | |
| 1581 | | A | CONNECTOR | | CN4601 | 1-794-519-21 | PIN, CONNECTOR (PC BOARD) 14P | | |
| 1582 | | A | CONNECTOR | | CN4603 | 1-774-769-11 | CONNECTOR, FFC/FPC 25P | | |
| 1583 | | A | CONNECTOR | * | CN4604 | 1-573-768-21 | PIN, CONNECTOR (1.5MM) (SMD)5P | | |
| 1584 | | A | CONNECTOR | | CN4605 | 1-779-884-11 | CONNECTOR 4P | | |
| 1585 | | A | CONNECTOR | | CN6450 | 1-766-715-21 | CONNECTOR, BOARD TO BOARD 10P | | |
| 1586 | | A | CONNECTOR | | CN6451 | 1-766-715-21 | CONNECTOR, BOARD TO BOARD 10P | | |
| 1587 | | A | CONNECTOR | | CN7001 | 1-573-290-21 | PIN, CONNECTOR (1.5MM) (SMD)4P | | |
| 1588 | | A | CONNECTOR | * | CN7002 | 1-770-470-21 | PIN, CONNECTOR (PC BOARD) 6P | | |
| 1589 | | A | CONNECTOR | | CN9007 | 1-766-382-21 | PIN, CONNECTOR (1.5MM)(SMD)10P | | |
| 1590 | | A | DIODE | | D4602 | 8-719-081-34 | DIODE RB160M-30TR | | |
| 1591 | | A | DIODE | | D4603 | 8-719-081-34 | DIODE RB160M-30TR | | |
| 1592 | | A | DIODE | | D4604 | 8-719-080-41 | DIODE RB063L-30TE25 | | |
| 1593 | | A | DIODE | | D4605 | 6-500-294-01 | DIODE PTZ-TE25-3.9B | | |
| 1594 | | A | DIODE | | D4606 | 8-719-068-71 | DIODE PTZ-TE25-13A | | |
| 1595 | | A | DIODE | | D4607 | 8-719-083-63 | DIODE UDZSTE-1713B | | |
| 1596 | | A | DIODE | | D4609 | 8-719-081-99 | DIODE MM3Z13VT1 | | |
| 1597 | | A | DIODE | | D4610 | 8-719-083-63 | DIODE UDZSTE-1713B | | |
| 1598 | | A | DIODE | | D4611 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 1599 | | A | DIODE | | D4612 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 1600 | | A | DIODE | | D4649 | 8-719-078-04 | DIODE EC31QS03L-TE12L | | |
| 1601 | | A | DIODE | | D4650 | 8-719-078-04 | DIODE EC31QS03L-TE12L | | |
| 1602 | | A | DIODE | | D4651 | 8-719-078-04 | DIODE EC31QS03L-TE12L | | |
| 1603 | | A | DIODE | | D4652 | 8-719-078-04 | DIODE EC31QS03L-TE12L | | |
| 1604 | | A | DIODE | | D4653 | 8-719-078-04 | DIODE EC31QS03L-TE12L | | |
| 1605 | | A | DIODE | | D4654 | 8-719-078-04 | DIODE EC31QS03L-TE12L | | |
| 1606 | | A | DIODE | | D4655 | 8-719-078-04 | DIODE EC31QS03L-TE12L | | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|--------------|-----|----------|--------------|-----------------------|-----------|-----------|
| 1607 | | A | DIODE | | D4656 | 8-719-078-04 | DIODE EC31QS03L-TE12L | | |
| 1608 | | A | DIODE | | D4657 | 8-719-078-04 | DIODE EC31QS03L-TE12L | | |
| 1609 | | A | DIODE | | D4658 | 8-719-078-04 | DIODE EC31QS03L-TE12L | | |
| 1610 | | A | DIODE | | D4659 | 8-719-078-04 | DIODE EC31QS03L-TE12L | | |
| 1611 | | A | DIODE | | D4660 | 8-719-078-04 | DIODE EC31QS03L-TE12L | | |
| 1612 | | A | DIODE | | D4661 | 8-719-078-04 | DIODE EC31QS03L-TE12L | | |
| 1613 | | A | DIODE | | D4662 | 8-719-078-04 | DIODE EC31QS03L-TE12L | | |
| 1614 | | A | DIODE | | D6448 | 8-719-064-03 | DIODE HZU16B2TRF | | |
| 1615 | | A | DIODE | | D6449 | 8-719-064-03 | DIODE HZU16B2TRF | | |
| 1616 | | A | DIODE | | D6450 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 1617 | | A | DIODE | | D7006 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 1618 | | A | DIODE | | D7007 | 8-719-081-97 | DIODE MMDL914T1 | | |
| 1619 | | A | DIODE | | D7008 | 8-719-085-31 | DIODE MM3Z2V4T1 | | |
| 1620 | | A | DIODE | | D7009 | 8-719-085-31 | DIODE MM3Z2V4T1 | | |
| 1621 | | A | DIODE | | D9006 | 8-719-977-28 | DIODE DTZ10B | | |
| 1622 | | A | DIODE | | D9007 | 8-719-977-28 | DIODE DTZ10B | | |
| 1623 | | A | DIODE | | D9010 | 8-719-977-28 | DIODE DTZ10B | | |
| 1624 | | A | DIODE | | D9011 | 8-719-977-28 | DIODE DTZ10B | | |
| 1625 | | A | DIODE | | D9016 | 8-719-977-28 | DIODE DTZ10B | | |
| 1626 | | A | DIODE | | D9020 | 8-719-977-28 | DIODE DTZ10B | | |
| 1627 | | A | DIODE | | D9021 | 8-719-977-28 | DIODE DTZ10B | | |
| 1628 | | A | DIODE | | D9023 | 8-719-977-28 | DIODE DTZ10B | | |
| 1629 | | A | DIODE | | D9024 | 8-719-977-28 | DIODE DTZ10B | | |
| 1630 | | A | DIODE | | D9027 | 8-719-977-28 | DIODE DTZ10B | | |
| 1631 | | A | DIODE | | D9028 | 8-719-977-28 | DIODE DTZ10B | | |
| 1632 | | A | DIODE | | D9029 | 8-719-977-28 | DIODE DTZ10B | | |
| 1633 | | A | DIODE | | D9030 | 8-719-977-28 | DIODE DTZ10B | | |
| 1634 | | A | DIODE | | D9031 | 8-719-977-28 | DIODE DTZ10B | | |
| 1635 | | A | FERRITE BEAD | | FB2510 | 1-414-445-11 | FERRITE 0UH | | |
| 1636 | | A | FERRITE BEAD | | FB2511 | 1-414-445-11 | FERRITE 0UH | | |
| 1637 | | A | FERRITE BEAD | | FB4601 | 1-469-775-21 | FERRITE 0UH | | |
| 1638 | | A | FERRITE BEAD | | FB4602 | 1-469-775-21 | FERRITE 0UH | | |
| 1639 | | A | FERRITE BEAD | | FB4603 | 1-469-775-21 | FERRITE 0UH | | |
| 1640 | | A | FERRITE BEAD | | FB4604 | 1-414-445-11 | FERRITE 0UH | | |
| 1641 | | A | FERRITE BEAD | | FB4605 | 1-469-775-21 | FERRITE 0UH | | |
| 1642 | | A | FERRITE BEAD | | FB4608 | 1-469-775-21 | FERRITE 0UH | | |
| 1643 | | A | FERRITE BEAD | | FB4609 | 1-469-775-21 | FERRITE 0UH | | |
| 1644 | | A | IC | | IC2505 | 8-752-108-35 | IC CXA2171AQ | | |
| 1645 | | A | IC | | IC2506 | 8-759-660-21 | IC SN74HCT02APWR | | |
| 1646 | | A | IC | | IC2507 | 8-759-533-85 | IC L88M05T-FA-TL | | |
| 1647 | | A | IC | | IC2511 | 8-759-548-56 | IC M52055FP | | |
| 1648 | | A | IC | | IC2803 | 8-752-087-76 | IC CXA2089Q-T6 | | |
| 1649 | | A | IC | | IC4601 | 6-702-510-01 | IC TPS5120DBTR | | |
| 1650 | | A | IC | | IC4602 | 8-759-394-36 | IC BA09T | | |
| 1651 | | A | IC | | IC4603 | 8-759-450-47 | IC BA05T | | |
| 1652 | | A | IC | | IC6701 | 8-752-395-13 | IC CXD2085M-T4 | | |
| 1653 | | A | IC | | IC7001 | 8-759-460-79 | IC BA09FP-E2 | | |
| 1654 | | A | IC | | IC7002 | 8-759-359-49 | IC NJM3414AV(TE2) | | |
| 1655 | | A | IC | | IC7003 | 6-702-817-12 | IC BD3869AF-E2 | | |
| 1656 | | A | IC | | IC7004 | 8-759-278-58 | IC NJM4558V-TE2 | | |
| 1657 | | A | IC | | IC7005 | 8-759-278-58 | IC NJM4558V-TE2 | | |
| 1658 | | A | IC | | IC7007 | 6-704-783-01 | IC TA8256BH | | |
| 1659 | | A | IC | | IC7009 | 8-759-278-58 | IC NJM4558V-TE2 | | |
| 1660 | | A | IC | | IC7010 | 8-759-278-58 | IC NJM4558V-TE2 | | |
| 1661 | | A | IC | | IC7011 | 6-701-096-01 | IC NJM2700FJ1 | | |
| 1662 | | A | IC | | IC7400 | 8-759-278-58 | IC NJM4558V-TE2 | | |
| 1663 | | A | JACK | | J7400 | 1-794-623-21 | JACK, PIN 2P | | |
| 1664 | | A | JACK | | J9002 | 1-794-623-21 | JACK, PIN 2P | | |
| 1665 | | A | JACK | | J9003 | 1-779-037-11 | JACK, PIN 3P | | |
| 1666 | | A | COIL | | L2505 | 1-469-525-91 | INDUCTOR 10UH | | |
| 1667 | | A | COIL | | L2509 | 1-469-525-91 | INDUCTOR 10UH | | |
| 1668 | | A | COIL | | L2520 | 1-469-525-91 | INDUCTOR 10UH | | |
| 1669 | | A | COIL | | L2802 | 1-469-526-91 | INDUCTOR 22UH | | |
| 1670 | | A | COIL | | L4601 | 1-424-916-21 | INDUCTOR 10UH | | |
| 1671 | | A | COIL | | L4602 | 1-424-922-21 | INDUCTOR 10UH | | |
| 1672 | | A | COIL | | L6451 | 1-412-030-11 | INDUCTOR 22UH | | |
| 1673 | | A | COIL | | L6452 | 1-412-030-11 | INDUCTOR 22UH | | |
| 1674 | | A | COIL | | L6453 | 1-412-030-11 | INDUCTOR 22UH | | |
| 1675 | | A | COIL | | L6454 | 1-412-030-11 | INDUCTOR 22UH | | |
| 1676 | | A | COIL | | L6701 | 1-469-525-91 | INDUCTOR 10UH | | |
| 1677 | | A | COIL | | L6702 | 1-469-525-91 | INDUCTOR 10UH | | |
| 1678 | | A | IC LINK | △ | PS4601 | 1-533-651-11 | IC LINK 1.6A 24V | | |
| 1679 | | A | IC LINK | △ | PS4602 | 1-576-731-21 | IC LINK 2.5A 24V | | |

| No. | # | Board | Type | △/* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|------------|-----|----------|--------------|---------------------------|-----------|-----------|
| 1680 | | A | IC LINK | △ | PS6450 | 1-533-674-11 | IC LINK 0.5A 50V | | |
| 1681 | | A | IC LINK | △ | PS7001 | 1-576-390-91 | IC LINK 2.5A 50V | | |
| 1682 | | A | TRANSISTOR | | Q2504 | 6-550-586-01 | TRANSISTOR 2PA1576R-115 | | |
| 1683 | | A | TRANSISTOR | | Q2533 | 6-550-585-01 | TRANSISTOR 2PC4081R-115 | | |
| 1684 | | A | TRANSISTOR | | Q2535 | 6-550-585-01 | TRANSISTOR 2PC4081R-115 | | |
| 1685 | | A | TRANSISTOR | | Q2537 | 8-729-122-63 | TRANSISTOR 2SA1226-E4 | | |
| 1686 | | A | TRANSISTOR | | Q2538 | 8-729-122-63 | TRANSISTOR 2SA1226-E4 | | |
| 1687 | | A | TRANSISTOR | | Q2539 | 8-729-122-63 | TRANSISTOR 2SA1226-E4 | | |
| 1688 | | A | TRANSISTOR | | Q2540 | 8-729-117-73 | TRANSISTOR 2SC4178-F14 | | |
| 1689 | | A | TRANSISTOR | | Q2541 | 8-729-117-73 | TRANSISTOR 2SC4178-F14 | | |
| 1690 | | A | TRANSISTOR | | Q2542 | 8-729-117-73 | TRANSISTOR 2SC4178-F14 | | |
| 1691 | | A | TRANSISTOR | | Q2556 | 8-729-122-63 | TRANSISTOR 2SA1226-E4 | | |
| 1692 | | A | TRANSISTOR | | Q2557 | 8-729-122-63 | TRANSISTOR 2SA1226-E4 | | |
| 1693 | | A | TRANSISTOR | | Q2558 | 8-729-025-28 | TRANSISTOR 2SK1828 | | |
| 1694 | | A | TRANSISTOR | | Q2559 | 8-729-025-28 | TRANSISTOR 2SK1828 | | |
| 1695 | | A | TRANSISTOR | | Q2560 | 8-729-122-63 | TRANSISTOR 2SA1226-E4 | | |
| 1696 | | A | TRANSISTOR | | Q2801 | 6-550-586-01 | TRANSISTOR 2PA1576R-115 | | |
| 1697 | | A | TRANSISTOR | | Q2802 | 6-550-586-01 | TRANSISTOR 2PA1576R-115 | | |
| 1698 | | A | TRANSISTOR | | Q4601 | 8-729-054-66 | TRANSISTOR HAT2071R-EL | | |
| 1699 | | A | TRANSISTOR | | Q4602 | 8-729-054-66 | TRANSISTOR HAT2071R-EL | | |
| 1700 | | A | TRANSISTOR | | Q4603 | 8-729-053-79 | TRANSISTOR IRF7901D1-TR | | |
| 1701 | | A | TRANSISTOR | | Q4604 | 6-550-586-01 | TRANSISTOR 2PA1576R-115 | | |
| 1702 | | A | TRANSISTOR | | Q4605 | 8-729-054-36 | TRANSISTOR UPA1716G-E2 | | |
| 1703 | | A | TRANSISTOR | | Q4606 | 8-729-907-00 | TRANSISTOR DTC114EU | | |
| 1704 | | A | TRANSISTOR | | Q4607 | 6-550-586-01 | TRANSISTOR 2PA1576R-115 | | |
| 1705 | | A | TRANSISTOR | | Q6450 | 6-550-549-01 | TRANSISTOR DTC114EUAFT106 | | |
| 1706 | | A | TRANSISTOR | | Q6451 | 6-550-549-01 | TRANSISTOR DTC114EUAFT106 | | |
| 1707 | | A | TRANSISTOR | | Q6452 | 6-550-585-01 | TRANSISTOR 2PC4081R-115 | | |
| 1708 | | A | TRANSISTOR | | Q6453 | 6-550-586-01 | TRANSISTOR 2PA1576R-115 | | |
| 1709 | | A | TRANSISTOR | | Q6454 | 6-550-585-01 | TRANSISTOR 2PC4081R-115 | | |
| 1710 | | A | TRANSISTOR | | Q6455 | 6-550-585-01 | TRANSISTOR 2PC4081R-115 | | |
| 1711 | | A | TRANSISTOR | | Q6456 | 6-550-586-01 | TRANSISTOR 2PA1576R-115 | | |
| 1712 | | A | TRANSISTOR | | Q6701 | 6-550-585-01 | TRANSISTOR 2PC4081R-115 | | |
| 1713 | | A | TRANSISTOR | | Q7001 | 8-729-920-21 | TRANSISTOR DTC314TK-T-146 | | |
| 1714 | | A | TRANSISTOR | | Q7002 | 8-729-920-21 | TRANSISTOR DTC314TK-T-146 | | |
| 1715 | | A | TRANSISTOR | | Q7003 | 8-729-422-33 | TRANSISTOR 2SD601A-Q-TX | | |
| 1716 | | A | TRANSISTOR | | Q7004 | 8-729-209-15 | TRANSISTOR 2SD2012 | | |
| 1717 | | A | TRANSISTOR | | Q7005 | 8-729-920-21 | TRANSISTOR DTC314TK-T-146 | | |
| 1718 | | A | TRANSISTOR | | Q7006 | 8-729-920-21 | TRANSISTOR DTC314TK-T-146 | | |
| 1719 | | A | TRANSISTOR | | Q7007 | 6-550-076-01 | TRANSISTOR MUN5213T1 | | |
| 1720 | | A | TRANSISTOR | | Q7011 | 6-550-076-01 | TRANSISTOR MUN5213T1 | | |
| 1721 | | A | TRANSISTOR | | Q7400 | 8-729-044-58 | TRANSISTOR SI2304DS-T1 | | |
| 1722 | | A | TRANSISTOR | | Q7401 | 8-729-044-58 | TRANSISTOR SI2304DS-T1 | | |
| 1723 | | A | RESISTOR | | R2511 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1724 | | A | RESISTOR | | R2512 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1725 | | A | RESISTOR | | R2513 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1726 | | A | RESISTOR | | R2515 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1727 | | A | RESISTOR | | R2519 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 1728 | | A | RESISTOR | | R2520 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 1729 | | A | RESISTOR | | R2521 | 1-216-851-11 | METAL CHIP 330K 5% 1/10W | | |
| 1730 | | A | RESISTOR | | R2534 | 1-218-716-11 | METAL CHIP 10K 0.5% 1/10W | | |
| 1731 | | A | RESISTOR | | R2539 | 1-216-797-11 | METAL CHIP 10 5% 1/10W | | |
| 1732 | | A | RESISTOR | | R2540 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1733 | | A | RESISTOR | | R2541 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1734 | | A | RESISTOR | | R2546 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1735 | | A | RESISTOR | | R2553 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1736 | | A | RESISTOR | | R2562 | 1-216-827-11 | METAL CHIP 3.3K 5% 1/10W | | |
| 1737 | | A | RESISTOR | | R2563 | 1-216-827-11 | METAL CHIP 3.3K 5% 1/10W | | |
| 1738 | | A | RESISTOR | | R2564 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1739 | | A | RESISTOR | | R2565 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1740 | | A | RESISTOR | | R2566 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1741 | | A | RESISTOR | | R2572 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 1742 | | A | RESISTOR | | R2573 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1743 | | A | RESISTOR | | R2574 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 1744 | | A | RESISTOR | | R2575 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1745 | | A | RESISTOR | | R2576 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 1746 | | A | RESISTOR | | R2577 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1747 | | A | RESISTOR | | R2584 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1748 | | A | RESISTOR | | R2585 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1749 | | A | RESISTOR | | R2586 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1750 | | A | RESISTOR | | R2587 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1751 | | A | RESISTOR | | R2588 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1752 | | A | RESISTOR | | R2589 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |

| No. | # | Board | Type | Δ/μ | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|----------|--------------|----------|--------------|----------------------------|-----------|-----------|
| 1753 | | A | RESISTOR | | R2591 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1754 | | A | RESISTOR | | R2664 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1755 | | A | RESISTOR | | R2670 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 1756 | | A | RESISTOR | | R2671 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 1757 | | A | RESISTOR | | R2672 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 1758 | | A | RESISTOR | | R2679 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 1759 | | A | RESISTOR | | R2682 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1760 | | A | RESISTOR | | R2683 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 1761 | | A | RESISTOR | | R2686 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1762 | | A | RESISTOR | | R2687 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 1763 | | A | RESISTOR | | R2688 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1764 | | A | RESISTOR | | R2689 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1765 | | A | RESISTOR | | R2690 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 1766 | | A | RESISTOR | | R2691 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1767 | | A | RESISTOR | | R2692 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1768 | | A | RESISTOR | | R2693 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1769 | | A | RESISTOR | | R2694 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 1770 | | A | RESISTOR | | R2695 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1771 | | A | RESISTOR | | R2699 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1772 | | A | RESISTOR | | R2707 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1773 | | A | RESISTOR | | R2708 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1774 | | A | RESISTOR | | R2709 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1775 | | A | RESISTOR | | R2740 | 1-218-674-11 | METAL CHIP 180 0.5% 1/10W | | |
| 1776 | | A | RESISTOR | | R2742 | 1-218-690-11 | METAL CHIP 820 0.5% 1/10W | | |
| 1777 | | A | RESISTOR | | R2755 | 1-216-823-11 | METAL CHIP 1.5K 5% 1/10W | | |
| 1778 | | A | RESISTOR | | R2757 | 1-216-806-11 | METAL CHIP 56 5% 1/10W | | |
| 1779 | | A | RESISTOR | | R2760 | 1-218-668-11 | METAL CHIP 100 0.5% 1/10W | | |
| 1780 | | A | RESISTOR | | R2763 | 1-216-823-11 | METAL CHIP 1.5K 5% 1/10W | | |
| 1781 | | A | RESISTOR | | R2764 | 1-216-806-11 | METAL CHIP 56 5% 1/10W | | |
| 1782 | | A | RESISTOR | | R2766 | 1-218-668-11 | METAL CHIP 100 0.5% 1/10W | | |
| 1783 | | A | RESISTOR | | R2772 | 1-216-823-11 | METAL CHIP 1.5K 5% 1/10W | | |
| 1784 | | A | RESISTOR | | R2773 | 1-216-806-11 | METAL CHIP 56 5% 1/10W | | |
| 1785 | | A | RESISTOR | | R2775 | 1-218-668-11 | METAL CHIP 100 0.5% 1/10W | | |
| 1786 | | A | RESISTOR | | R2801 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 1787 | | A | RESISTOR | | R2802 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1788 | | A | RESISTOR | | R2803 | 1-218-827-11 | METAL CHIP 150 0.5% 1/10W | | |
| 1789 | | A | RESISTOR | | R2804 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 1790 | | A | RESISTOR | | R2805 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1791 | | A | RESISTOR | | R2807 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1792 | | A | RESISTOR | | R2811 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1793 | | A | RESISTOR | | R2812 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1794 | | A | RESISTOR | | R2813 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1795 | | A | RESISTOR | | R2814 | 1-218-845-11 | METAL CHIP 820 0.5% 1/10W | | |
| 1796 | | A | RESISTOR | | R2815 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 1797 | | A | RESISTOR | | R2816 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 1798 | | A | RESISTOR | | R2819 | 1-216-295-91 | SHORT CHIP 0 | | |
| 1799 | | A | RESISTOR | | R2820 | 1-216-295-91 | SHORT CHIP 0 | | |
| 1800 | | A | RESISTOR | | R2821 | 1-216-295-91 | SHORT CHIP 0 | | |
| 1801 | | A | RESISTOR | | R2822 | 1-216-295-91 | SHORT CHIP 0 | | |
| 1802 | | A | RESISTOR | | R2825 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1803 | | A | RESISTOR | | R2826 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1804 | | A | RESISTOR | | R2827 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1805 | | A | RESISTOR | | R2828 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1806 | | A | RESISTOR | | R2829 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1807 | | A | RESISTOR | | R4603 | 1-218-873-11 | METAL CHIP 12K 0.5% 1/10W | | |
| 1808 | | A | RESISTOR | | R4604 | 1-218-862-11 | METAL CHIP 4.3K 0.5% 1/10W | | |
| 1809 | | A | RESISTOR | | R4606 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 1810 | | A | RESISTOR | | R4607 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 1811 | | A | RESISTOR | | R4608 | 1-218-868-11 | METAL CHIP 7.5K 0.5% 1/10W | | |
| 1812 | | A | RESISTOR | | R4609 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1813 | | A | RESISTOR | | R4610 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1814 | | A | RESISTOR | | R4611 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1815 | | A | RESISTOR | | R4612 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 1816 | | A | RESISTOR | | R4613 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 1817 | | A | RESISTOR | | R4614 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | | |
| 1818 | | A | RESISTOR | | R4615 | 1-218-867-11 | METAL CHIP 6.8K 0.5% 1/10W | | |
| 1819 | | A | RESISTOR | | R4616 | 1-218-864-11 | METAL CHIP 5.1K 0.5% 1/10W | | |
| 1820 | | A | RESISTOR | | R4617 | 1-218-837-11 | METAL CHIP 390 0.5% 1/10W | | |
| 1821 | | A | RESISTOR | | R4618 | 1-218-878-11 | METAL CHIP 20K 0.5% 1/10W | | |
| 1822 | | A | RESISTOR | | R4619 | 1-216-847-11 | METAL CHIP 150K 5% 1/10W | | |
| 1823 | | A | RESISTOR | | R4620 | 1-218-883-11 | METAL CHIP 33K 0.5% 1/10W | | |
| 1824 | | A | RESISTOR | | R4621 | 1-218-889-11 | METAL CHIP 56K 0.5% 1/10W | | |
| 1825 | | A | RESISTOR | | R4622 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |

| No. | # | Board | Type | Δ/μ | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|----------|--------------|----------|--------------|---------------------------|-----------|-----------|
| 1826 | | A | RESISTOR | | R4623 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 1827 | | A | RESISTOR | | R4624 | 1-216-295-91 | SHORT CHIP 0 | | |
| 1828 | | A | RESISTOR | | R4625 | 1-469-869-21 | FERRITE 0UH | | |
| 1829 | | A | RESISTOR | | R4626 | 1-216-295-91 | SHORT CHIP 0 | | |
| 1830 | | A | RESISTOR | | R4627 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1831 | | A | RESISTOR | | R4628 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1832 | | A | RESISTOR | | R4629 | 1-216-295-91 | SHORT CHIP 0 | | |
| 1833 | | A | RESISTOR | | R4630 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | | |
| 1834 | | A | RESISTOR | | R4631 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1835 | | A | RESISTOR | | R4632 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1836 | | A | RESISTOR | | R4633 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1837 | | A | RESISTOR | | R4636 | 1-400-180-21 | INDUCTOR 0UH | | |
| 1838 | | A | RESISTOR | | R4638 | 1-216-839-11 | METAL CHIP 33K 5% 1/10W | | |
| 1839 | | A | RESISTOR | | R4639 | 1-216-847-11 | METAL CHIP 150K 5% 1/10W | | |
| 1840 | | A | RESISTOR | | R4641 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1841 | | A | RESISTOR | | R4642 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1842 | | A | RESISTOR | | R4643 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1843 | | A | RESISTOR | | R4644 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 1844 | | A | RESISTOR | | R4645 | 1-216-847-11 | METAL CHIP 150K 5% 1/10W | | |
| 1845 | | A | RESISTOR | | R6446 | 1-216-295-91 | SHORT CHIP 0 | | |
| 1846 | | A | RESISTOR | | R6447 | 1-216-295-91 | SHORT CHIP 0 | | |
| 1847 | | A | RESISTOR | | R6448 | 1-216-295-91 | SHORT CHIP 0 | | |
| 1848 | | A | RESISTOR | | R6450 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1849 | | A | RESISTOR | | R6451 | 1-216-828-11 | METAL CHIP 3.9K 5% 1/10W | | |
| 1850 | | A | RESISTOR | | R6452 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1851 | | A | RESISTOR | | R6453 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1852 | | A | RESISTOR | | R6454 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | | |
| 1853 | | A | RESISTOR | | R6455 | 1-216-828-11 | METAL CHIP 3.9K 5% 1/10W | | |
| 1854 | | A | RESISTOR | | R6456 | 1-216-826-11 | METAL CHIP 2.7K 5% 1/10W | | |
| 1855 | | A | RESISTOR | | R6458 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 1856 | | A | RESISTOR | | R6459 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | | |
| 1857 | | A | RESISTOR | | R6460 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 1858 | | A | RESISTOR | | R6461 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1859 | | A | RESISTOR | | R6462 | 1-218-687-11 | METAL CHIP 620 0.5% 1/10W | | |
| 1860 | | A | RESISTOR | | R6463 | 1-218-867-11 | RES-CHIP 6.8K 0.5% 1/10W | | |
| 1861 | | A | RESISTOR | | R6464 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 1862 | | A | RESISTOR | | R6465 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1863 | | A | RESISTOR | | R6467 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 1864 | | A | RESISTOR | | R6469 | 1-218-689-11 | METAL CHIP 750 0.5% 1/10W | | |
| 1865 | | A | RESISTOR | | R6470 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1866 | | A | RESISTOR | | R6472 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1867 | | A | RESISTOR | | R6701 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1868 | | A | RESISTOR | | R6702 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1869 | | A | RESISTOR | | R6703 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 1870 | | A | RESISTOR | | R6704 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 1871 | | A | RESISTOR | | R6705 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 1872 | | A | RESISTOR | | R6706 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 1873 | | A | RESISTOR | | R6707 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1874 | | A | RESISTOR | | R6708 | 1-216-839-11 | METAL CHIP 33K 5% 1/10W | | |
| 1875 | | A | RESISTOR | | R6709 | 1-216-797-11 | METAL CHIP 10 5% 1/10W | | |
| 1876 | | A | RESISTOR | | R6710 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1877 | | A | RESISTOR | | R6711 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1878 | | A | RESISTOR | | R6712 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1879 | | A | RESISTOR | | R6713 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1880 | | A | RESISTOR | | R6714 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 1881 | | A | RESISTOR | | R6715 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 1882 | | A | RESISTOR | | R7002 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1883 | | A | RESISTOR | | R7003 | 1-216-846-11 | METAL CHIP 120K 5% 1/10W | | |
| 1884 | | A | RESISTOR | | R7004 | 1-216-822-11 | METAL CHIP 1.2K 5% 1/10W | | |
| 1885 | | A | RESISTOR | | R7005 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 1886 | | A | RESISTOR | | R7006 | 1-216-822-11 | METAL CHIP 1.2K 5% 1/10W | | |
| 1887 | | A | RESISTOR | | R7007 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 1888 | | A | RESISTOR | | R7011 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1889 | | A | RESISTOR | | R7012 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1890 | | A | RESISTOR | | R7013 | 1-216-840-11 | METAL CHIP 39K 5% 1/10W | | |
| 1891 | | A | RESISTOR | | R7014 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1892 | | A | RESISTOR | | R7015 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1893 | | A | RESISTOR | | R7016 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1894 | | A | RESISTOR | | R7017 | 1-216-846-11 | METAL CHIP 120K 5% 1/10W | | |
| 1895 | | A | RESISTOR | | R7018 | 1-216-822-11 | METAL CHIP 1.2K 5% 1/10W | | |
| 1896 | | A | RESISTOR | | R7019 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 1897 | | A | RESISTOR | | R7020 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1898 | | A | RESISTOR | | R7021 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |

| No. | # | Board | Type | Δ/\ast | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|----------|---------------|----------|--------------|---------------------------|-----------|-----------|
| 1899 | | A | RESISTOR | | R7022 | 1-216-822-11 | METAL CHIP 1.2K 5% 1/10W | | |
| 1900 | | A | RESISTOR | | R7023 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1901 | | A | RESISTOR | | R7024 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1902 | | A | RESISTOR | | R7025 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1903 | | A | RESISTOR | | R7026 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | | |
| 1904 | | A | RESISTOR | | R7027 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 1905 | | A | RESISTOR | | R7028 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 1906 | | A | RESISTOR | | R7029 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 1907 | | A | RESISTOR | | R7030 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 1908 | | A | RESISTOR | | R7031 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1909 | | A | RESISTOR | | R7033 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1910 | | A | RESISTOR | | R7034 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1911 | | A | RESISTOR | | R7035 | 1-216-838-11 | METAL CHIP 27K 5% 1/10W | | |
| 1912 | | A | RESISTOR | | R7036 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1913 | | A | RESISTOR | | R7038 | 1-216-847-11 | METAL CHIP 150K 5% 1/10W | | |
| 1914 | | A | RESISTOR | | R7040 | 1-216-838-11 | METAL CHIP 27K 5% 1/10W | | |
| 1915 | | A | RESISTOR | | R7041 | 1-216-842-11 | METAL CHIP 56K 5% 1/10W | | |
| 1916 | | A | RESISTOR | | R7042 | 1-218-727-11 | RES-CHIP 30K 0.5% 1/10W | | |
| 1917 | | A | RESISTOR | | R7043 | 1-218-890-11 | RES-CHIP 62K 0.5% 1/10W | | |
| 1918 | | A | RESISTOR | | R7044 | 1-216-838-11 | METAL CHIP 27K 5% 1/10W | | |
| 1919 | | A | RESISTOR | | R7046 | 1-218-344-11 | METAL CHIP 7.5K 5% 1/10W | | |
| 1920 | | A | RESISTOR | | R7047 | 1-216-832-11 | METAL CHIP 8.2K 5% 1/10W | | |
| 1921 | | A | RESISTOR | | R7048 | 1-216-852-11 | METAL CHIP 390K 5% 1/10W | | |
| 1922 | | A | RESISTOR | | R7049 | 1-216-830-11 | METAL CHIP 5.6K 5% 1/10W | | |
| 1923 | | A | RESISTOR | | R7051 | 1-216-795-11 | METAL CHIP 6.8 5% 1/10W | | |
| 1924 | | A | RESISTOR | | R7052 | 1-216-822-11 | METAL CHIP 1.2K 5% 1/10W | | |
| 1925 | | A | RESISTOR | | R7053 | 1-216-830-11 | METAL CHIP 5.6K 5% 1/10W | | |
| 1926 | | A | RESISTOR | | R7054 | 1-216-852-11 | METAL CHIP 390K 5% 1/10W | | |
| 1927 | | A | RESISTOR | | R7055 | 1-216-830-11 | METAL CHIP 5.6K 5% 1/10W | | |
| 1928 | | A | RESISTOR | | R7056 | 1-216-818-11 | METAL CHIP 560 5% 1/10W | | |
| 1929 | | A | RESISTOR | | R7058 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1930 | | A | RESISTOR | | R7059 | 1-216-795-11 | METAL CHIP 6.8 5% 1/10W | | |
| 1931 | | A | RESISTOR | | R7060 | 1-216-795-11 | METAL CHIP 6.8 5% 1/10W | | |
| 1932 | | A | RESISTOR | | R7061 | 1-216-847-11 | METAL CHIP 150K 5% 1/10W | | |
| 1933 | | A | RESISTOR | | R7062 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 1934 | | A | RESISTOR | | R7063 | 1-216-830-11 | METAL CHIP 5.6K 5% 1/10W | | |
| 1935 | | A | RESISTOR | | R7064 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1936 | | A | RESISTOR | | R7065 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | | |
| 1937 | | A | RESISTOR | | R7066 | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W | | |
| 1938 | | A | RESISTOR | | R7067 | 1-216-832-11 | METAL CHIP 8.2K 5% 1/10W | | |
| 1939 | | A | RESISTOR | | R7069 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1940 | | A | RESISTOR | | R7070 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1941 | | A | RESISTOR | | R7071 | 1-218-344-11 | METAL CHIP 7.5K 5% 1/10W | | |
| 1942 | | A | RESISTOR | | R7074 | 1-216-838-11 | METAL CHIP 27K 5% 1/10W | | |
| 1943 | | A | RESISTOR | | R7075 | 1-216-842-11 | METAL CHIP 56K 5% 1/10W | | |
| 1944 | | A | RESISTOR | | R7076 | 1-218-727-11 | RES-CHIP 30K 0.5% 1/10W | | |
| 1945 | | A | RESISTOR | | R7077 | 1-218-890-11 | RES-CHIP 62K 0.5% 1/10W | | |
| 1946 | | A | RESISTOR | | R7078 | 1-216-838-11 | METAL CHIP 27K 5% 1/10W | | |
| 1947 | | A | RESISTOR | | R7079 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1948 | | A | RESISTOR | | R7080 | 1-216-838-11 | METAL CHIP 27K 5% 1/10W | | |
| 1949 | | A | RESISTOR | | R7081 | 1-216-822-11 | METAL CHIP 1.2K 5% 1/10W | | |
| 1950 | | A | RESISTOR | | R7082 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 1951 | | A | RESISTOR | | R7083 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1952 | | A | RESISTOR | | R7084 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 1953 | | A | RESISTOR | | R7085 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1954 | | A | RESISTOR | | R7086 | 1-216-864-11 | SHORT CHIP 0 | | |
| 1955 | | A | RESISTOR | | R7088 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 1956 | | A | RESISTOR | | R7089 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 1957 | | A | RESISTOR | | R7090 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1958 | | A | RESISTOR | | R7091 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1959 | | A | RESISTOR | | R7092 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1960 | | A | RESISTOR | | R7093 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 1961 | | A | RESISTOR | | R7094 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1962 | | A | RESISTOR | | R7097 | 1-216-820-11 | METAL CHIP 820 5% 1/10W | | |
| 1963 | | A | RESISTOR | | R7102 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 1964 | | A | RESISTOR | | R7103 | 1-216-840-11 | METAL CHIP 39K 5% 1/10W | | |
| 1965 | | A | RESISTOR | | R7106 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 1966 | | A | RESISTOR | | R7107 | 1-216-841-11 | METAL CHIP 47K 5% 1/10W | | |
| 1967 | | A | RESISTOR | | R7108 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 1968 | | A | RESISTOR | | R7109 | 1-216-827-11 | METAL CHIP 3.3K 5% 1/10W | | |
| 1969 | | A | RESISTOR | | R7110 | 1-216-857-11 | METAL CHIP 1M 5% 1/10W | | |
| 1970 | | A | RESISTOR | | R7111 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 1971 | | A | RESISTOR | | R7112 | 1-216-820-11 | METAL CHIP 820 5% 1/10W | | |

| No. | # | Board | Type | Δ/μ | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|----------|--------------|----------|--------------|---------------------------|-----------|-----------|
| 1972 | | A | RESISTOR | | R7113 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 1973 | | A | RESISTOR | | R7114 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1974 | | A | RESISTOR | | R7118 | 1-216-838-11 | METAL CHIP 27K 5% 1/10W | | |
| 1975 | | A | RESISTOR | | R7119 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1976 | | A | RESISTOR | | R7120 | 1-216-795-11 | METAL CHIP 6.8 5% 1/10W | | |
| 1977 | | A | RESISTOR | | R7121 | 1-216-840-11 | METAL CHIP 39K 5% 1/10W | | |
| 1978 | | A | RESISTOR | | R7122 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1979 | | A | RESISTOR | | R7123 | 1-216-827-11 | METAL CHIP 3.3K 5% 1/10W | | |
| 1980 | | A | RESISTOR | | R7124 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1981 | | A | RESISTOR | | R7125 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1982 | | A | RESISTOR | | R7126 | 1-218-873-11 | METAL CHIP 12K 0.5% 1/10W | | |
| 1983 | | A | RESISTOR | | R7127 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 1984 | | A | RESISTOR | | R7128 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1985 | | A | RESISTOR | | R7129 | 1-216-843-11 | METAL CHIP 68K 5% 1/10W | | |
| 1986 | | A | RESISTOR | | R7130 | 1-216-795-11 | METAL CHIP 6.8 5% 1/10W | | |
| 1987 | | A | RESISTOR | | R7131 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 1988 | | A | RESISTOR | | R7132 | 1-216-834-11 | METAL CHIP 12K 5% 1/10W | | |
| 1989 | | A | RESISTOR | | R7133 | 1-216-795-11 | METAL CHIP 6.8 5% 1/10W | | |
| 1990 | | A | RESISTOR | | R7134 | 1-216-840-11 | METAL CHIP 39K 5% 1/10W | | |
| 1991 | | A | RESISTOR | | R7135 | 1-218-741-11 | RES-CHIP 110K 0.5% 1/10W | | |
| 1992 | | A | RESISTOR | | R7136 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 1993 | | A | RESISTOR | | R7137 | 1-216-795-11 | METAL CHIP 6.8 5% 1/10W | | |
| 1994 | | A | RESISTOR | | R7138 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | | |
| 1995 | | A | RESISTOR | | R7139 | 1-216-865-11 | METAL CHIP 3K 5% 1/10W | | |
| 1996 | | A | RESISTOR | | R7140 | 1-202-926-11 | METAL CHIP 36K 5% 1/10W | | |
| 1997 | | A | RESISTOR | | R7141 | 1-216-832-11 | METAL CHIP 8.2K 5% 1/10W | | |
| 1998 | | A | RESISTOR | | R7142 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 1999 | | A | RESISTOR | | R7143 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2000 | | A | RESISTOR | | R7144 | 1-216-837-11 | METAL CHIP 22K 5% 1/10W | | |
| 2001 | | A | RESISTOR | | R7145 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 2002 | | A | RESISTOR | | R7146 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 2003 | | A | RESISTOR | | R7147 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2004 | | A | RESISTOR | | R7148 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2005 | | A | RESISTOR | | R7149 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 2006 | | A | RESISTOR | | R7150 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |
| 2007 | | A | RESISTOR | | R7152 | 1-216-795-11 | METAL CHIP 6.8 5% 1/10W | | |
| 2008 | | A | RESISTOR | | R7162 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2009 | | A | RESISTOR | | R7163 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2010 | | A | RESISTOR | | R7164 | 1-216-795-11 | METAL CHIP 6.8 5% 1/10W | | |
| 2011 | | A | RESISTOR | | R7401 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2012 | | A | RESISTOR | | R7402 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 2013 | | A | RESISTOR | | R7403 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 2014 | | A | RESISTOR | | R7404 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 2015 | | A | RESISTOR | | R7405 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 2016 | | A | RESISTOR | | R7406 | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W | | |
| 2017 | | A | RESISTOR | | R7407 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 2018 | | A | RESISTOR | | R7408 | 1-216-845-11 | METAL CHIP 100K 5% 1/10W | | |
| 2019 | | A | RESISTOR | | R7409 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2020 | | A | RESISTOR | | R7410 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2021 | | A | RESISTOR | | R7411 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 2022 | | A | RESISTOR | | R7412 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2023 | | A | RESISTOR | | R7413 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2024 | | A | RESISTOR | | R7414 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 2025 | | A | RESISTOR | | R7415 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 2026 | | A | RESISTOR | | R7416 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 2027 | | A | RESISTOR | | R7417 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 2028 | | A | RESISTOR | | R7418 | 1-216-833-11 | METAL CHIP 10K 5% 1/10W | | |
| 2029 | | A | RESISTOR | | R7420 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2030 | | A | RESISTOR | | R7421 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2031 | | A | RESISTOR | | R7422 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2032 | | A | RESISTOR | | R7423 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2033 | | A | RESISTOR | | R7440 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 2034 | | A | RESISTOR | | R7441 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 2035 | | A | RESISTOR | | R7443 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2036 | | A | RESISTOR | | R7444 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2037 | | A | RESISTOR | | R7445 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2038 | | A | RESISTOR | | R7448 | 1-216-823-11 | METAL CHIP 1.5K 5% 1/10W | | |
| 2039 | | A | RESISTOR | | R7449 | 1-216-823-11 | METAL CHIP 1.5K 5% 1/10W | | |
| 2040 | | A | RESISTOR | | R7450 | 1-216-823-11 | METAL CHIP 1.5K 5% 1/10W | | |
| 2041 | | A | RESISTOR | | R7451 | 1-216-823-11 | METAL CHIP 1.5K 5% 1/10W | | |
| 2042 | | A | RESISTOR | | R7452 | 1-216-823-11 | METAL CHIP 1.5K 5% 1/10W | | |
| 2043 | | A | RESISTOR | | R7453 | 1-216-823-11 | METAL CHIP 1.5K 5% 1/10W | | |
| 2044 | | A | RESISTOR | | R7454 | 1-216-823-11 | METAL CHIP 1.5K 5% 1/10W | | |

| No. | # | Board | Type | Δ /* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|-----------|-------------|----------|--------------|--------------------------|-----------|-----------|
| 2045 | | A | RESISTOR | | R7455 | 1-216-823-11 | METAL CHIP 1.5K 5% 1/10W | | |
| 2046 | | A | RESISTOR | | R7456 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2047 | | A | RESISTOR | | R7457 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2048 | | A | RESISTOR | | R9000 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2049 | | A | RESISTOR | | R9001 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2050 | | A | RESISTOR | | R9002 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2051 | | A | RESISTOR | | R9004 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 2052 | | A | RESISTOR | | R9005 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2053 | | A | RESISTOR | | R9006 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2054 | | A | RESISTOR | | R9007 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2055 | | A | RESISTOR | | R9008 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 2056 | | A | RESISTOR | | R9010 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2057 | | A | RESISTOR | | R9012 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2058 | | A | RESISTOR | | R9013 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2059 | | A | RESISTOR | | R9014 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 2060 | | A | RESISTOR | | R9020 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2061 | | A | RESISTOR | | R9021 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2062 | | A | RESISTOR | | R9023 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2063 | | A | RESISTOR | | R9024 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 2064 | | A | RESISTOR | | R9025 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2065 | | A | RESISTOR | | R9026 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2066 | | A | RESISTOR | | R9027 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2067 | | A | RESISTOR | | R9028 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 2068 | | A | RESISTOR | | R9030 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2069 | | A | RESISTOR | | R9031 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2070 | | A | RESISTOR | | R9032 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2071 | | A | RESISTOR | | R9033 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 2072 | | A | RESISTOR | | R9036 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 2073 | | A | RESISTOR | | R9043 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 2074 | | A | RESISTOR | | R9044 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 2075 | | A | RESISTOR | | R9045 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2076 | | A | RESISTOR | | R9048 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 2077 | | A | RESISTOR | | R9052 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 2078 | | A | RESISTOR | | R9053 | 1-216-853-11 | METAL CHIP 470K 5% 1/10W | | |
| 2079 | | A | RESISTOR | | R9056 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2080 | | A | RESISTOR | | R9057 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2081 | | A | RESISTOR | | R9060 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2082 | | A | RESISTOR | | R9063 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2083 | | A | RESISTOR | | R9064 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2084 | | A | RESISTOR | | R9065 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2085 | | A | RESISTOR | | R9066 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 2086 | | A | RESISTOR | | R9067 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 2087 | | A | RESISTOR | | R9068 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 2088 | | A | RESISTOR | | R9070 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2089 | | A | RESISTOR | | R9071 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 2090 | | A | RESISTOR | | R9072 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2091 | | A | RESISTOR | | R9073 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 2092 | | A | RESISTOR | | R9074 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 2093 | | A | RESISTOR | | R9075 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 2094 | | A | RESISTOR | | R9076 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2095 | | A | RESISTOR | | R9077 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 2096 | | A | RESISTOR | | R9078 | 1-216-821-11 | METAL CHIP 1K 5% 1/10W | | |
| 2097 | | A | RESISTOR | | R9079 | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W | | |
| 2098 | | A | RESISTOR | | R9080 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2099 | | A | RESISTOR | | R9081 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2100 | | A | RESISTOR | | R9082 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2101 | | A | RESISTOR | | R9083 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2102 | | A | RESISTOR | | R9084 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2103 | | A | VARISTOR | | VD7401 | 1-801-925-21 | VARISTOR, CHIP (1608) | | |
| 2104 | | A | VARISTOR | | VD7402 | 1-801-925-21 | VARISTOR, CHIP (1608) | | |
| 2105 | | A | VARISTOR | | VD9000 | 1-801-925-21 | VARISTOR, CHIP (1608) | | |
| 2106 | | A | VARISTOR | | VD9001 | 1-801-925-21 | VARISTOR, CHIP (1608) | | |
| 2107 | | A | VARISTOR | | VD9010 | 1-801-925-21 | VARISTOR, CHIP (1608) | | |
| 2108 | | A | VARISTOR | | VD9020 | 1-801-925-21 | VARISTOR, CHIP (1608) | | |
| 2109 | | A | VARISTOR | | VD9021 | 1-801-925-21 | VARISTOR, CHIP (1608) | | |
| 2110 | | A | VARISTOR | | VD9030 | 1-801-925-21 | VARISTOR, CHIP (1608) | | |
| 2111 | | A | VARISTOR | | VD9060 | 1-801-925-21 | VARISTOR, CHIP (1608) | | |
| 2112 | | A | VARISTOR | | VD9070 | 1-801-925-21 | VARISTOR, CHIP (1608) | | |
| 2113 | | A | VARISTOR | | VD9071 | 1-801-925-21 | VARISTOR, CHIP (1608) | | |
| 2114 | | A | CRYSTAL | | X2502 | 1-795-214-21 | VIBRATOR, CERAMIC (4MHZ) | | |
| 2115 | | A | CRYSTAL | | X6701 | 1-767-989-11 | VIBRATOR, CERAMIC | | |
| 2116 | | H3 | CONNECTOR | * | CN1601 | 1-569-775-21 | PIN, CONNECTOR (SMD) 5P | | |
| 2117 | | H3 | DIODE | | D1602 | 6-500-487-01 | DIODE SMLU12D16W | | |

| No. | # | Board | Type | Δ /* | Ref. No. | Part No. | Description | Remarks-1 | Remarks-2 |
|------|---|-------|------------|-------------|----------|--------------|----------------------------------|-----------|-----------|
| 2118 | | H3 | DIODE | | D1604 | 6-500-487-01 | DIODE SMLU12D16W | | |
| 2119 | | H3 | TRANSISTOR | | Q1601 | 6-550-549-01 | TRANSISTOR DTC114EUAFT106 | | |
| 2120 | | H3 | TRANSISTOR | | Q1602 | 6-550-549-01 | TRANSISTOR DTC114EUAFT106 | | |
| 2121 | | H3 | TRANSISTOR | | Q1603 | 6-550-549-01 | TRANSISTOR DTC114EUAFT106 | | |
| 2122 | | H3 | TRANSISTOR | | Q1604 | 6-550-548-01 | TRANSISTOR DTA114EUAFT106 | | |
| 2123 | | H3 | TRANSISTOR | | Q1605 | 6-550-548-01 | TRANSISTOR DTA114EUAFT106 | | |
| 2124 | | H3 | TRANSISTOR | | Q1606 | 6-550-548-01 | TRANSISTOR DTA114EUAFT106 | | |
| 2125 | | H3 | RESISTOR | | R1603 | 1-216-812-11 | METAL CHIP 180 5% 1/10W | | |
| 2126 | | H3 | RESISTOR | | R1604 | 1-216-812-11 | METAL CHIP 180 5% 1/10W | | |
| 2127 | | H3 | RESISTOR | | R1605 | 1-216-820-11 | METAL CHIP 820 5% 1/10W | | |
| 2128 | | H3 | RESISTOR | | R1606 | 1-216-809-11 | METAL CHIP 100 5% 1/10W | | |
| 2129 | | H1 | CAPACITOR | | C1501 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 2130 | | H1 | CAPACITOR | | C1504 | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V | | |
| 2131 | | H1 | CONNECTOR | | CN1501 | 1-580-056-21 | PIN, CONNECTOR (SMD) 3P | | |
| 2132 | | H1 | RESISTOR | | R1501 | 1-216-813-11 | METAL CHIP 220 5% 1/10W | | |
| 2133 | | H1 | RESISTOR | | R1502 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 2134 | | H1 | RESISTOR | | R1503 | 1-218-457-11 | METAL CHIP 910 5% 1/10W | | |
| 2135 | | H1 | RESISTOR | | R1504 | 1-216-826-11 | METAL CHIP 2.7K 5% 1/10W | | |
| 2136 | | H1 | SWITCH | | S1501 | 1-572-595-11 | SWITCH, TACTIL (REFLOW TYPE) | | |
| 2137 | | H1 | SWITCH | | S1502 | 1-572-595-11 | SWITCH, TACTIL (REFLOW TYPE) | | |
| 2138 | | H1 | SWITCH | | S1503 | 1-572-595-11 | SWITCH, TACTIL (REFLOW TYPE) | | |
| 2139 | | H1 | SWITCH | | S1504 | 1-572-595-11 | SWITCH, TACTIL (REFLOW TYPE) | | |
| 2140 | | H1 | SWITCH | | S1505 | 1-572-595-11 | SWITCH, TACTIL (REFLOW TYPE) | | |
| 2141 | | H1 | SWITCH | | S1508 | 1-572-595-11 | SWITCH, TACTIL (REFLOW TYPE) | | |
| 2142 | | H2 | CONNECTOR | | CN7601 | 1-580-057-11 | PIN, CONNECTOR (SMD) 4P | | |
| 2143 | | H2 | JACK | | J7601 | 1-794-392-11 | JACK | | |
| 2144 | | H2 | RESISTOR | | R7601 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2145 | | H2 | RESISTOR | | R7602 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2146 | | H2 | RESISTOR | | R7603 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2147 | | H2 | RESISTOR | | R7604 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2148 | | U1 | CONNECTOR | | CN9201 | 1-766-382-21 | PIN, CONNECTOR (1.5MM)(SMD)10P | | |
| 2149 | | U1 | JACK | | J9201 | 1-694-716-11 | TERMINAL BLOCK, S(LIGHT ANGLE) | | |
| 2150 | | U1 | JACK | | J9202 | 1-694-716-11 | TERMINAL BLOCK, S(LIGHT ANGLE) | | |
| 2151 | | U1 | RESISTOR | | R9201 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2152 | | U1 | RESISTOR | | R9202 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2153 | | U1 | RESISTOR | | R9203 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2154 | | U1 | RESISTOR | | R9204 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2155 | | U1 | RESISTOR | | R9205 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2156 | | U1 | RESISTOR | | R9206 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2157 | | U1 | RESISTOR | | R9207 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2158 | | U1 | RESISTOR | | R9208 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2159 | | U1 | RESISTOR | | R9209 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2160 | | U1 | RESISTOR | | R9210 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2161 | | U1 | RESISTOR | | R9211 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2162 | | U1 | RESISTOR | | R9212 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2163 | | U1 | RESISTOR | | R9213 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2164 | | U1 | RESISTOR | | R9214 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2165 | | U1 | RESISTOR | | R9215 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2166 | | U1 | RESISTOR | | R9216 | 1-216-864-11 | SHORT CHIP 0 | | |
| 2167 | | H4 | CAPACITOR | | C1651 | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V | | |
| 2168 | | H4 | CAPACITOR | | C1652 | 1-119-667-11 | CERAMIC CHIP 22UF 10V | | |
| 2169 | | H4 | CAPACITOR | | C1653 | 1-119-667-11 | CERAMIC CHIP 22UF 10V | | |
| 2170 | | H4 | CONNECTOR | | CN1651 | 1-580-056-21 | PIN, CONNECTOR (SMD) 3P | | |
| 2171 | | H4 | DIODE | | D1651 | 8-719-036-94 | DIODE RD5.6SB-T1 | | |
| 2172 | | H4 | IC | | IC1651 | 8-759-515-60 | IC RS-20 | | |
| 2173 | | H4 | RESISTOR | | R1651 | 1-216-817-11 | METAL CHIP 470 5% 1/10W | | |
| 2174 | | H4 | RESISTOR | | R1652 | 1-216-805-11 | METAL CHIP 47 5% 1/10W | | |

SERVICE MANUAL

AT2 Chassis

| <u>MODEL NAME</u> | <u>REMOTE COMMANDER</u> | <u>DESTINATION</u> |
|-------------------|-------------------------|--------------------|
| KLV-21SR2 | RM-Y1104 | US/CND |

ORIGINAL MANUAL ISSUE DATE: 10/2003

 : UPDATED ITEM

| REVISION DATE | SUBJECT |
|---------------|---|
| 10/2003 | No revisions or updates are applicable at this time. |
| 12/2003 | Added Information Labels and Carton P/N's for "Made in Mexico Models" to Section 2 Exploded View. Replaced pages 2-2, 2-3, and 2-4E. |
| 12/2003 | Added new P/N's for A Board, TU Board, H1 Board, H2 Board, H3 Board, H4 Board, and U1 Board for "Made in Mexico Models" Section 2 Exploded View. Replaced page 2-3. |
| 05/2004 | Reissue entire manual to include Adjustments and Diagrams sections. |
| 1/2005 | Added Caution statement (Replaced page 3) |